

---

# **Avocado Virt Test Compatibility Layer Documentation**

*Release 68.0*

**Lucas Meneghel Rodrigues**

**Feb 13, 2019**



---

# Contents

---

<b>1</b>	<b>About Avocado-VT</b>	<b>3</b>
1.1	About virt-test . . . . .	3
<b>2</b>	<b>Getting Started</b>	<b>5</b>
2.1	Installing Avocado . . . . .	5
2.2	Installing Avocado-VT . . . . .	5
2.3	First steps with Avocado-VT . . . . .	6
<b>3</b>	<b>Writing Tests</b>	<b>9</b>
3.1	Test Providers . . . . .	9
3.2	Development workflow after the Repository Split . . . . .	11
3.3	Writing your own avocado VT test . . . . .	12
3.4	Defining New Guests . . . . .	17
<b>4</b>	<b>Install Optional Packages</b>	<b>19</b>
4.1	Fedora and EL . . . . .	19
4.2	Debian . . . . .	21
<b>5</b>	<b>Listing guests</b>	<b>25</b>
<b>6</b>	<b>Advanced Topics and Maintenance</b>	<b>27</b>
6.1	How tests are run . . . . .	27
6.2	Cartesian Configuration . . . . .	27
6.3	Building test applications . . . . .	41
6.4	Networking . . . . .	43
6.5	Performance Testing . . . . .	44
6.6	Setup a virtual environment for multi host tests . . . . .	48
6.7	Multi Host Migration Tests . . . . .	51
6.8	Links with downloadable images for virt tests . . . . .	55
6.9	GlusterFS support . . . . .	57
6.10	Setting up a Regression Test Farm for KVM . . . . .	58
6.11	Installing Windows virtio drivers with Avocado-VT . . . . .	64
6.12	Running QEMU kvm-unit-tests . . . . .	66
6.13	Parallel Jobs . . . . .	73
6.14	Running in emulation mode (TCG) . . . . .	74
6.15	Contribution and Community Guide . . . . .	76
6.16	Experimental features . . . . .	77

<b>7</b>	<b>API Reference</b>	<b>79</b>
7.1	virttest . . . . .	79
<b>8</b>	<b>Cartesian Config Reference</b>	<b>137</b>
8.1	Cartesian Config . . . . .	137
8.2	Indices and tables . . . . .	183
	<b>Python Module Index</b>	<b>185</b>

Contents:



---

## About Avocado-VT

---

Avocado-VT is a compatibility plugin that lets you execute virtualization related tests (then known as virt-test), with all conveniences provided by Avocado.

Its main purpose is to serve as an automated regression testing tool for virt developers, and for doing regular automated testing of virt technologies (provided you use it with the server testing infrastructure).

Avocado-VT aims to be a centralizing project for most of the virt functional and performance testing needs. We cover:

- Guest OS install, for both Windows (WinXP - Win7) and Linux (RHEL, Fedora, OpenSUSE and others through step engine mechanism)
- Serial output for Linux guests
- Migration, networking, timedrift and other types of tests

For the qemu subtests, we can do things like:

- Monitor control for both human and QMP protocols
- Build and use qemu using various methods (source tarball, git repo, rpm)
- Some level of performance testing can be made.
- The KVM unit tests can be run comfortably from inside virt-test, we do have full integration with the unittest execution

We support x86\_64 hosts with hardware virtualization support (AMD and Intel), and Intel 32 and 64 bit guest operating systems.

## 1.1 About virt-test

Virt-test is the project that became Avocado-VT. It used to live under the Autotest umbrella, under:

<http://github.com/autotest/virt-test>

That repository is now frozen and only available at that location for historical purposes.



The first step towards using Avocado-VT is, quite obviously, installing it.

### 2.1 Installing Avocado

Start by following the instructions on [this link](#).

### 2.2 Installing Avocado-VT

Having installed Avocado, you should already have the right repos enabled.

---

**Note:** If you use avocado from sources, use *make link* as described [here](#).

---

#### 2.2.1 Fedora and Enterprise Linux

Installing Avocado-VT on Fedora or Enterprise Linux is a matter of installing the *avocado-plugins-vt* package. Install it with:

```
$ yum install avocado-plugins-vt
```

#### 2.2.2 Bootstrapping Avocado-VT

After the package, a bootstrap process must be run. Choose your test backend (qemu, libvirt, v2v, openvswitch, etc) and run the *vt-bootstrap* command. Example:

```
$ avocado vt-bootstrap --vt-type qemu
```

**Note:** If you don't intend to use JeOS and don't want to install the xz you can use `avocado vt-bootstrap --vt-type qemu --vt-guest-os $OS_OF_YOUR_CHOICE` which bypasses the xz check.

---

The output should be similar to:

```
12:02:10 INFO | qemu test config helper
12:02:10 INFO |
12:02:10 INFO | 1 - Updating all test providers
12:02:10 INFO |
12:02:10 INFO | 2 - Checking the mandatory programs and headers
12:02:10 INFO | /bin/xz OK
12:02:10 INFO | /sbin/tcpdump OK
...
12:02:11 INFO | /usr/include/asm/unistd.h OK
12:02:11 INFO |
12:02:11 INFO | 3 - Checking the recommended programs
12:02:11 INFO | /bin/qemu-kvm OK
12:02:11 INFO | /bin/qemu-img OK
12:02:11 INFO | /bin/qemu-io OK
...
12:02:33 INFO | 7 - Checking for modules kvm, kvm-intel
12:02:33 DEBUG| Module kvm loaded
12:02:33 DEBUG| Module kvm-intel loaded
12:02:33 INFO |
12:02:33 INFO | 8 - If you wish, you may take a look at the online docs for more info
12:02:33 INFO |
12:02:33 INFO | http://avocado-vt.readthedocs.org/
```

If there are missing requirements, please install them and re-run `vt-bootstrap`.

## 2.3 First steps with Avocado-VT

Let's check if things went well by listing the Avocado plugins:

```
$ avocado plugins
```

That command should show the loaded plugins, and hopefully no errors. The relevant lines will be:

```
Plugins that add new commands (avocado.plugins.cli.cmd):
vt-bootstrap Avocado VT - implements the 'vt-bootstrap' subcommand
...
Plugins that add new options to commands (avocado.plugins.cli):
vt          Avocado VT/virt-test support to 'run' command
vt-list    Avocado-VT/virt-test support for 'list' command
```

Then let's list the tests available with:

```
$ avocado list --vt-type qemu --verbose
```

This should list a large amount of tests (over 1900 virt related tests):

```
ACCESS_DENIED: 0
BROKEN_SYMLINK: 0
BUGGY: 0
```

(continues on next page)

(continued from previous page)

```
INSTRUMENTED: 49
MISSING: 0
NOT_A_TEST: 27
SIMPLE: 3
VT: 1906
```

Now let's run a virt test:

```
$ avocado run type_specific.io-github-autotest-qemu.migrate.default.tcp
JOB ID      : <id>
JOB LOG     : /home/<user>/avocado/job-results/job-2015-06-15T19.46-1c3da89/job.log
JOB HTML    : /home/<user>/avocado/job-results/job-2015-06-15T19.46-1c3da89/html/
↳ results.html
TESTS      : 1
(1/1) type_specific.io-github-autotest-qemu.migrate.default.tcp: PASS (95.76 s)
PASS       : 1
ERROR      : 0
FAIL       : 0
SKIP       : 0
WARN       : 0
INTERRUPT  : 0
TIME       : 95.76 s
```

If you have trouble executing the steps provided in this guide, you have a few options:

- Send an e-mail to [the avocado mailing list](#).
- Open an issue on [the avocado-vt github area](#).
- We also hang out on [IRC \(irc.oftc.net, #avocado\)](#).



This documentation aims to help you write virt tests of your own. It's organized to explain briefly the source structure, then writing simple tests, then doing more complex stuff, such as defining custom guests.

Contents:

### 3.1 Test Providers

Test providers are the conjunction of a loadable module mechanism inside Avocado-VT that can pull a directory that will provide tests, config files and any dependencies, and those directories. The design goals behind test providers are:

- Make it possible for other organizations to maintain test repositories, in other arbitrary git repositories.
- Stabilize API and enforce separation of core Avocado-VT functionality and tests.

The test provider spec is divided in Provider Layout and Definition files.

#### 3.1.1 Test Provider Layout

```
.
|-- backend_1      -> Backend name. The actual name doesn't matter.
|  |-- cfg         -> Test config directory. Holds base files for the test runner.
|  |-- deps       -> Auxiliary files such as ELF files, Windows executables,
↳images that tests need.
|  |-- provider_lib -> Shared libraries among tests.
|  `-- tests      -> Python test files.
|      `-- cfg     -> Config files for tests.
`-- backend_2
    |-- cfg
    |-- deps
    |-- provider_lib
    `-- tests
        `-- cfg
```

In fact, Avocado-VT libraries are smart enough to support arbitrary organization of python and config files inside the ‘tests’ directory. You don’t need to name the top level sub directories after backend names, although that certainly makes things easier. The term ‘backend’ is used to refer to the supported virtualization technologies by Avocado-VT. As of this writing, the backends known by Avocado-VT are:

- generic (tests that run in multiple backends)
- qemu
- openvswitch
- libvirt
- v2v
- libguestfs
- lvsb

The reason why you don’t need to name the directories after the backend names is that you can configure a test definition file to point out any dir name. We’ll get into

### 3.1.2 Types of Test Providers

Each test provider can be either a local filesystem directory, or a subdirectory of a git repository. Of course, the git repo subdirectory can be the repo root directory, but one of the points of the proposal is that people can hold Avocado-VT providers inside git repos of other projects. Say qemu wants to maintain its own provider, they can do this by holding the tests, say, inside a tests/avocado\_vt subdirectory inside qemu.git.

### 3.1.3 Test Provider definition file

The main Avocado-VT suite needs a way to know about test providers. It does that by scanning definition files inside the ‘test-providers.d’ sub directory. Definition files are *config parser files* <<http://docs.python.org/2/library/configparser.html>> that encode information from a test provider. Here’s an example structure of a test provider file:

```
[provider]

# Test provider URI (default is a git repository, fallback to standard dir)
uri: git://git-provider.com/repo.git
#uri: /path-to-my-git-dir/repo.git
#uri: http://bla.com/repo.git
#uri: file://usr/share/tests

# Optional git branch (for git repo type)
branch: master

# Optional git commit reference (tag or sha1)
ref: e44231e88300131621586d24c07baa8e627de989

# Pubkey: File containing public key for signed tags (git)
pubkey: example.pub

# What follows is a sequence of sections for any backends that this test
# provider implements tests for. You must specify the sub directories of
# each backend dir, reason why the subdir names can be arbitrary.
```

(continues on next page)

(continued from previous page)

```
[qemu]
# Optional subdir (place inside repo where the actual tests are)
# This is useful for projects to keep virt tests inside their
# (larger) test repos. Defaults to ''.
subdir: src/tests/qemu/

[agnostic]
# For each test backend, you may have different sub directories
subdir: src/tests/generic/
```

Example of a default Avocado-VT provider file:

```
[provider]
uri: https://github.com/autotest/tp-qemu.git
[generic]
subdir: generic/
[qemu]
subdir: qemu/
[openvswitch]
subdir: openvswitch/
```

Let's say you want to use a directory in your file system (/usr/share/tests/virt-test):

```
[provider]
uri: file:///usr/share/tests/
[generic]
subdir: virt-test/generic/
[qemu]
subdir: virt-test/qemu/
[openvswitch]
subdir: virt-test/openvswitch/
```

## 3.2 Development workflow after the Repository Split

1. Fork the test provider you want to contribute to in github

<https://help.github.com/articles/fork-a-repo>

2. Clone the forked repository. In this example, we'll assume you cloned the forked repo to

```
/home/user/code/tp-libvirt
```

3. Add a file in ~/avocado/data/avocado-vt/test-providers.d, with a name you like. We'll assume you chose

```
user-libvirt.ini
```

4. Contents of user-libvirt.ini:

```
[provider]
uri: file:///home/user/code/tp-libvirt
[libvirt]
subdir: libvirt/
[libguestfs]
```

(continues on next page)

(continued from previous page)

```

subdir: libguestfs/
[lvsb]
subdir: lvsb/
[v2v]
subdir: v2v/

```

5. This should be enough. Now, when you use `--list-tests`, you'll be able to see entries like:

```

...
1 user-libvirt.unattended_install.cdrom.extra_cdrom_ks.default_install.aio_native
2 user-libvirt.unattended_install.cdrom.extra_cdrom_ks.default_install.aio_threads
3 user-libvirt.unattended_install.cdrom.extra_cdrom_ks.perf.aio_native
...

```

6. Modify tests, or add new ones to your heart's content. When you're happy with your changes, you may create branches and [send us pull requests](#).

### 3.3 Writing your own avocado VT test

In this article, we'll talk about:

1. Where the test files are located
2. Write a simple test file
3. Try out your new test, send it to the mailing list

#### 3.3.1 Write our own 'uptime' test - Step by Step procedure

Now, let's go and write our uptime test, which only purpose in life is to pick up a living guest, connect to it via ssh, and return its uptime.

1. First we need to locate our provider directory. It's inside Avocado *data* directory (`avocado config --datadir`), usually in `~/avocado/data/avocado-vt`. We are going to write a generic `tp-qemu` test, so let's move into the right git location:

```
$ cd $AVOCADO_DATA/avocado-vt/test-providers.d/downloads/io-github-autotest-qemu
```

2. Our uptime test won't need any qemu specific feature. Thinking about it, we only need a `vm` object and establish an ssh session to it, so we can run the command. So we can store our brand new test under `generic/tests`:

```
$ touch generic/tests/uptime.py
$ git add generic/tests/uptime.py
```

3. OK, so that's a start. So, we have *at least* to implement a function `run`. Let's start with it and just put the keyword `pass`, which is a no op. Our test will be like:

```

def run(test, params, env):
    """
    Docstring describing uptime.
    """
    pass

```

4. Now, what is the API we need to grab a VM from our test environment? Our `env` object has a method, `get_vm`, that will pick up a given `vm` name stored in our environment. Some of them have aliases. `main_vm` contains the name of the main `vm` present in the environment, which is, most of the time, `vm1`. `env.get_vm` returns a `vm` object, which we'll store on the variable `vm`. It'll be like this:

```
def run(test, params, env):
    """
    Docstring describing uptime.
    """
    vm = env.get_vm(params["main_vm"])
```

5. A `vm` object has lots of interesting methods, which we plan on documenting them more thoroughly, but for now, we want to ensure that this VM is alive and functional, at least from a `qemu` process standpoint. So, we'll call the method `verify_alive()`, which will verify whether the `qemu` process is functional and if the monitors, if any exist, are functional. If any of these conditions are not satisfied due to any problem, an exception will be thrown and the test will fail. This requirement is because sometimes due to a bug the `vm` process might be dead on the water, or the monitors are not responding:

```
def run(test, params, env):
    """
    Docstring describing uptime.
    """
    vm = env.get_vm(params["main_vm"])
    vm.verify_alive()
```

6. Next step, we want to log into the `vm`. The `vm` method that does return a remote session object is called `wait_for_login()`, and as one of the parameters, it allows you to adjust the timeout, that is, the time we want to wait to see if we can grab an `ssh` prompt. We have top level variable `login_timeout`, and it is a good practice to retrieve it and pass its value to `wait_for_login()`, so if for some reason we're running on a slower host, the increase in one variable will affect all tests. Note that it is completely OK to just override this value, or pass nothing to `wait_for_login()`, since this method does have a default timeout value. Back to business, picking up `login_timeout` from our dict of parameters:

```
def run(test, params, env):
    """
    Docstring describing uptime.
    """
    vm = env.get_vm(params["main_vm"])
    vm.verify_alive()
    timeout = float(params.get("login_timeout", 240))
```

7. Now we'll call `wait_for_login()` and pass the timeout to it, storing the resulting session object on a variable named `session`:

```
def run(test, params, env):
    """
    Docstring describing uptime.
    """
    vm = env.get_vm(params["main_vm"])
    vm.verify_alive()
    timeout = float(params.get("login_timeout", 240))
    session = vm.wait_for_login(timeout=timeout)
```

8. Avocado-VT will do its best to grab this session, if it can't due to a timeout or other reason it'll throw a failure, failing the test. Assuming that things went well, now you have a `session` object, that allows you to type in commands on your guest and retrieve the outputs. So most of the time, we can get the output of these commands through the method `cmd()`. It will type in the command, grab the `stdin` and `stdout`, return them so you can store

it in a variable, and if the exit code of the command is `!= 0`, it'll throw a `aexpect.ShellError`?. So getting the output of the unix command `uptime` is as simple as calling `cmd()` with `'uptime'` as a parameter and storing the result in a variable called `uptime`:

```
def run(test, params, env):
    """
    Docstring describing uptime.
    """
    vm = env.get_vm(params["main_vm"])
    vm.verify_alive()
    timeout = float(params.get("login_timeout", 240))
    session = vm.wait_for_login(timeout=timeout)
    uptime = session.cmd('uptime')
```

**Warning:** Some guests OS's do not respect terminal `echo` setting, corrupting the output. There are some workaround described in [github issue#231](#).

- If you want to just print this value so it can be seen on the test logs, just log the value of `uptime` using the logging library. Since that is all we want to do, we may close the remote connection, to avoid `ssh/rss` sessions lying around your test machine, with the method `close()`.

```
def run(test, params, env):
    """
    Docstring describing uptime.
    """
    vm = env.get_vm(params["main_vm"])
    vm.verify_alive()
    timeout = float(params.get("login_timeout", 240))
    session = vm.wait_for_login(timeout=timeout)
    uptime = session.cmd('uptime')
    logging.info("Guest uptime result is: %s", uptime)
    session.close()
```

- Note that all failures that might happen here are implicitly handled by the methods called. If a test went from its beginning to its end without unhandled exceptions, avocado assumes the test automatically as **PASS**, *no need to mark a test as explicitly passed*. If you have explicit points of failure, for more complex tests, you might want to mark it explicitly. `test.cancel` makes the test **CANCEL** (it is a new feature which not supported in avocado 36lts, you may want to use `test.skip` to make the test **SKIP** to achieve the similar purpose), `test.error` makes the test **Error**, and `test.fail` makes the test **Fail**. And, in recent Avocado version (since commit `7ecf09fa`), three exceptions: `TestFail`, `TestError`, and `TestCancel` were added to avocado namespace, so you can import and use them appropriately. Note, people should not import exceptions from `avocado.core` to raise them in test case, see [avocado doc](#) for more details. *BTW, check the uptime makes no sense, but let's continue this example for test status explanation:*

```
def run(test, params, env):
    """
    Docstring describing uptime.
    """
    vm = env.get_vm(params["main_vm"])
    vm.verify_alive()
    timeout = float(params.get("login_timeout", 240))
    session = vm.wait_for_login(timeout=timeout)
    uptime = session.cmd('uptime')
    logging.info("Guest uptime result is: %s", uptime)
    session.close()
```

(continues on next page)

(continued from previous page)

```

expected_cancel_msg = '0 min'
expected_err_msg = '1 day'
expected_fail_msg = '10 days'
if expected_cancel_msg in uptime:
    test.cancel('Cancel message')
if expected_err_msg in uptime:
    test.error('Error message')
if expected_fail_msg in uptime:
    test.fail('Fail message')

```

11. Now, I deliberately introduced a bug on this code just to show you guys how to use some tools to find and remove trivial bugs on your code. I strongly encourage you guys to check your code with the *inspektor* tool. This tool uses pylint to catch bugs on test code. You can install inspektor by adding the COPR repo <https://copr.fedoraproject.org/coprs/lmr/Autotest/> and doing

```
$ yum install inspektor
```

After you're done, you can run it:

```

$ inspekt lint generic/tests/uptime.py
***** Module generic.tests.uptime
E0602: 10,4: run: Undefined variable 'logging'
Pylint check fail: generic/tests/uptime.py
Syntax check FAIL

```

12. Ouch. So there's this undefined variable called logging on line 10 of the code. It's because I forgot to import the logging library, which is a python library to handle info, debug, warning messages. Let's Fix it and the code becomes:

```

import logging

def run(test, params, env):
    """
    Docstring describing uptime.
    """
    vm = env.get_vm(params["main_vm"])
    vm.verify_alive()
    timeout = float(params.get("login_timeout", 240))
    session = vm.wait_for_login(timeout=timeout)
    uptime = session.cmd("uptime")
    logging.info("Guest uptime result is: %s", uptime)
    session.close()

```

13. Let's re-run inspektor to see if it's happy with the code generated:

```

$ inspekt lint generic/tests/uptime.py
Syntax check PASS

```

14. So we're good. Nice! Now, as good indentation does matter to python, *inspekt indent* will fix indentation problems, and cut trailing whitespaces on your code. Very nice for tidying up your test before submission:

```
$ inspekt indent generic/tests/uptime.py
```

15. Now, you can test your code. When listing the qemu tests your new test should appear in the list (or shouldn't it?):

```
$ avocado list uptime
```

16. There is one more thing to do. Avocado-vt does not walk the directories, it uses *Cartesian config* to define test and all possible variants of tests. To add our test to *Cartesian config* we need yet another file:

```
$ touch generic/tests/cfg/uptime.cfg
$ git add generic/tests/cfg/uptime.cfg
```

17. The file might look like this:

```
- uptime:
  virt_test_type = qemu libvirt
  type = uptime
```

where the *virt\_test\_type* specifies what backends can run this test and *type* specifies the test file. The *.py* will be appended and it'll be searched for in the usual location.

18. For the second time, let's try to discover the test:

```
$ avocado list uptime
```

19. OK still not there. We need to propagate the change to the actual config by running *vt-bootstrap*:

```
$ avocado vt-bootstrap
```

20. And now you'll finally see the test:

```
$ avocado list uptime
```

21. Now, you can run your test to see if everything went well:

```
$ avocado run --vt-type qemu uptime
```

22. OK, so now, we have something that can be git committed and sent to the mailing list (partial):

```
diff --git a/generic/tests/uptime.py b/generic/tests/uptime.py
index e69de29..65d46fa 100644
--- a/tests/uptime.py
+++ b/tests/uptime.py
@@ -0,0 +1,13 @@
+import logging
+
+def run(test, params, env):
+    """
+    Docstring describing uptime.
+    """
+    vm = env.get_vm(params["main_vm"])
+    vm.verify_alive()
+    timeout = float(params.get("login_timeout", 240))
+    session = vm.wait_for_login(timeout=timeout)
+    uptime = session.cmd("uptime")
+    logging.info("Guest uptime result is: %s", uptime)
+    session.close()
```

23. Oh, we forgot to add a decent docstring description. So doing it:

```

import logging

def run(test, params, env):

    """
    Uptime test for virt guests:

    1) Boot up a VM.
    2) Establish a remote connection to it.
    3) Run the 'uptime' command and log its results.

    :param test: QEMU test object.
    :param params: Dictionary with the test parameters.
    :param env: Dictionary with test environment.
    """

    vm = env.get_vm(params["main_vm"])
    vm.verify_alive()
    timeout = float(params.get("login_timeout", 240))
    session = vm.wait_for_login(timeout=timeout)
    uptime = session.cmd("uptime")
    logging.info("Guest uptime result is: %s", uptime)
    session.close()

```

24. git commit signing it, put a proper description, then send it with git send-email. Profit!

## 3.4 Defining New Guests

Let's say you have a guest image that you've carefully prepared, and the JeOS just doesn't cut it. Here's how you add new guests:

### 3.4.1 Linux Based Custom Guest

If your guest is Linux based, you can add a config file snippet describing your test (We have a bunch of pre-set values for linux in the default config).

The drop in directory is

```
shared/cfg/guest-os/Linux/LinuxCustom
```

You can add, say, foo.cfg to that dir with the content:

```
- FooLinux:
  image_name = images/foo-linux
```

Which would make it possible to specify this custom guest using

```
$ avocado run migrate..tcp --vt-type qemu --vt-guest-os LinuxCustom.FooLinux
JOB ID      : 44a399b427c51530ba2fcc37087c100917e1dd8a
JOB LOG     : /home/lmr/avocado/job-results/job-2015-07-29T03.47-44a399b/job.log
JOB HTML    : /home/lmr/avocado/job-results/job-2015-07-29T03.47-44a399b/html/results.
            ↪html
TESTS      : 3
(1/3) type_specific.io-github-autotest-qemu.migrate.default.tcp: PASS (31.34 s)
```

(continues on next page)

(continued from previous page)

```
(2/3) type_specific.io-github-autotest-qemu.migrate.with_set_speed.tcp: PASS (26.99 s)
(3/3) type_specific.io-github-autotest-qemu.migrate.with_reboot.tcp: PASS (46.40 s)
RESULTS      : PASS 3 | ERROR 0 | FAIL 0 | SKIP 0 | WARN 0 | INTERRUPT 0
TIME         : 104.73 s
```

Provided that you have a file called `images/foo-linux.qcow2`, if using the `qcow2` format image.

Other useful params to set (not an exhaustive list):

```
# shell_prompt is a regexp used to match the prompt on aexpect.
# if your custom os is based of some distro listed in the guest-os
# dir, you can look on the files and just copy shell_prompt
shell_prompt = [*]$
# If you plan to use a raw device, set image_device = yes
image_raw_device = yes
# Password of your image
password = 123456
# Shell client used (may be telnet or ssh)
shell_client = ssh
# Port were the shell client is running
shell_port = 22
# File transfer client
file_transfer_client = scp
# File transfer port
file_transfer_port = 22
```

### 3.4.2 Windows Based Custom Guest

If your guest is Linux based, you can add a config file snippet describing your test (We have a bunch of pre-set values for linux in the default config).

The drop in directory is

```
shared/cfg/guest-os/Windows/WindowsCustom
```

You can add, say, `foo.cfg` to that dir with the content:

```
- FooWindows:
  image_name = images/foo-windows
```

Which would make it possible to specify this custom guest using

```
$ avocado run migrate..tcp --vt-type qemu --vt-guest-os WindowsCustom.FooWindows
```

Provided that you have a file called `images/foo-windows.qcow2`.

Other useful params to set (not an exhaustive list):

```
# If you plan to use a raw device, set image_device = yes
image_raw_device = yes
# Attention: Changing the password in this file is not supported,
# since files in winutils.iso use it.
username = Administrator
password = 1q2w3eP
```

---

## Install Optional Packages

---

Some packages are not set in the Avocado-VT as hard dependencies, because they may only be required depending on specific use cases.

If you run into problems while running specific tests, please verify if installing the mentioned packages fixes your problem.

### 4.1 Fedora and EL

Install the following packages:

1. Install a toolchain in your host, which you can do with Fedora and RHEL with:

```
$ yum groupinstall "Development Tools"
```

1. Install `tcpdump`, necessary to determine guest IPs automatically

```
$ yum install tcpdump
```

1. Install `nc`, necessary to get output from the serial device and other qemu devices

```
$ yum install nmap-ncat
```

1. Install the `xz` file archiver so you can uncompress the JeOS [2] image.

```
$ yum install xz
```

1. Install the `autotest-framework` package, to provide the needed autotest libs.

```
$ yum install --enablerepo=updates-testing autotest-framework
```

#. Install the `fakeroor` package, if you want to install from the CD Ubuntu and Debian servers without requiring root:

```
$ yum install fakeroot
```

If you don't install the autotest-framework package (say, your distro still doesn't have autotest packages, or you don't want to install the rpm), you'll have to clone an autotest tree and export this path as the AUTOTEST\_PATH variable, both as root and as your regular user. One could put the following on their ~/.bashrc file:

```
$ export AUTOTEST_PATH="/path/to/autotest"
```

where this AUTOTEST\_PATH will guide the run script to set up the needed libraries for all tests to work.

For other packages:

```
$ yum install git
```

So you can checkout the source code. If you want to test the distro provided qemu-kvm binary, you can install:

```
$ yum install qemu-kvm qemu-kvm-tools
```

To run libvirt tests, it's required to install the virt-install utility, for the basic purpose of building and cloning virtual machines.

```
$ yum install virt-install
```

To run all tests that involve filedescriptor passing, you need python-devel. The reason is, this test suite is compatible with python 2.4, whereas a std lib to pass filedescriptors was only introduced in python 3.2. Therefore, we had to introduce a C python extension that is compiled on demand.

```
$ yum install python-devel
```

It's useful to also install:

```
$ yum install python-imaging
```

Not vital, but very handy to do imaging conversion from ppm to jpeg and png (allows for smaller images).

### 4.1.1 Tests that are not part of the default JeOS set

If you want to run guest install tests, you need to be able to create floppies and isos to hold kickstart files:

```
$ yum install mkisofs
```

For newer distros, such as Fedora, you'll need:

```
$ yum install genisoimage
```

Both packages provide the same functionality, needed to create iso images that will be used during the guest installation process. You can also execute

### 4.1.2 Network tests

Last but not least, now we depend on libvirt to provide us a stable, working bridge. \* By default, the kvm test uses user networking, so this is not entirely necessary. However, non root and user space networking make a good deal of the hardcoded networking tests to not work. If you might want to use bridges eventually:

```
$ yum install libvirt bridge-utils
```

Make sure libvirtd is started:

```
$ service libvirtd start
```

Make sure the libvirt bridge shows up on the output of brctl show:

```
$ brctl show
bridge name bridge id          STP enabled interfaces
virbr0      8000.525400678eec    yes      virbr0-nic
```

## 4.2 Debian

Keep in mind that the current autotest package is a work in progress. For the purposes of running virt-tests it is fine, but it needs a lot of improvements until it can become a more ‘official’ package.

The autotest debian package repo can be found at <https://launchpad.net/~lmr/+archive/autotest>, and you can add the repos on your system putting the following on /etc/apt/sources.list:

```
$ deb http://ppa.launchpad.net/lmr/autotest/ubuntu raring main
$ deb-src http://ppa.launchpad.net/lmr/autotest/ubuntu raring main
```

Then update your software list:

```
$ apt-get update
```

This has been tested with Ubuntu 12.04, 12.10 and 13.04.

Install the following packages:

1. Install the autotest-framework package, to provide the needed autotest libs.

```
$ apt-get install autotest
```

1. Install the xz-utils file archiver so you can uncompress the JeOS [2] image.

```
$ apt-get install xz-utils
```

1. Install tcpdump, necessary to determine guest IPs automatically

```
$ apt-get install tcpdump
```

1. Install nc, necessary to get output from the serial device and other qemu devices

```
$ apt-get install netcat-openbsd
```

1. Install a toolchain in your host, which you can do on Debian and Ubuntu with:

```
$ apt-get install build-essential
```

#. Install fakeroot if you want to install from CD debian and ubuntu, not requiring root:

```
$ apt-get install fakeroot
```

So you install the core autotest libraries to run the tests.

If you don't install the autotest-framework package (say, your distro still doesn't have autotest packages, or you don't want to install the rpm), you'll have to clone an autotest tree and export this path as the AUTOTEST\_PATH variable, both as root and as your regular user. One could put the following on their ~/.bashrc file:

```
$ export AUTOTEST_PATH="/path/to/autotest"
```

where this AUTOTEST\_PATH will guide the run script to set up the needed libraries for all tests to work.

For other packages:

```
$ apt-get install git
```

So you can checkout the source code. If you want to test the distro provided qemu-kvm binary, you can install:

```
$ apt-get install qemu-kvm qemu-utils
```

To run libvirt tests, it's required to install the virt-install utility, for the basic purpose of building and cloning virtual machines.

```
$ apt-get install virtinst
```

To run all tests that involve filedescriptor passing, you need python-all-dev. The reason is, this test suite is compatible with python 2.4, whereas a std lib to pass filedescriptors was only introduced in python 3.2. Therefore, we had to introduce a C python extension that is compiled on demand.

```
$ apt-get install python-all-dev.
```

It's useful to also install:

```
$ apt-get install python-imaging
```

Not vital, but very handy to do imaging conversion from ppm to jpeg and png (allows for smaller images).

### 4.2.1 Tests that are not part of the default JeOS set

If you want to run guest install tests, you need to be able to create floppies and isos to hold kickstart files:

```
$ apt-get install genisoimage
```

### 4.2.2 Network tests

Last but not least, now we depend on libvirt to provide us a stable, working bridge. \* By default, the kvm test uses user networking, so this is not entirely necessary. However, non root and user space networking make a good deal of the hardcoded networking tests to not work. If you might want to use bridges eventually:

```
$ apt-get install libvirt-bin python-libvirt bridge-utils
```

Make sure libvirtd is started:

```
$ service libvirtd start
```

Make sure the libvirt bridge shows up on the output of brctl show:

```
$ brctl show
bridge name bridge id          STP enabled interfaces
virbr0      8000.525400678eec   yes      virbr0-nic
```



---

## Listing guests

---

If you want to see all guests defined, you can use

```
$ avocado list --vt-type [test type] --vt-list-guests
```

This will generate a list of possible guests that can be used for tests, provided that you have an image with them. The list will show which guests don't have an image currently available. If you did perform the usual bootstrap procedure, only JeOS.17.64 will be available.

Now, let's assume you have the image for another guest. Let's say you've installed Fedora 17, 64 bits, and that `--list-guests` shows it as downloaded

```
$ avocado list --vt-type qemu --vt-list-guests
...
Linux.CentOS.6.6.i386.i440fx (missing centos66-32.qcow2)
Linux.CentOS.6.6.x86_64.i440fx (missing centos66-64.qcow2)
```

You can list all the available tests for Fedora.17.64 (you must use the exact string printed by the test, minus obviously the index number, that's there only for informational purposes:

```
$ avocado list --vt-type qemu --vt-guest-os Linux.CentOS.6.6.i386.i440fx --verbose
...
VT          io-github-autotest-qemu.trans_hugepage.base
VT          io-github-autotest-qemu.trans_hugepage.defrag
VT          io-github-autotest-qemu.trans_hugepage.swapping
VT          io-github-autotest-qemu.trans_hugepage.relocated
VT          io-github-autotest-qemu.trans_hugepage.migration
VT          io-github-autotest-qemu.trans_hugepage.memory_stress
VT          io-github-autotest-qemu.ntpd
VT          io-github-autotest-qemu.clock_getres
VT          io-github-autotest-qemu.autotest_regression
VT          io-github-autotest-qemu.shutdown

ACCESS_DENIED: 0
BROKEN_SYMLINK: 0
```

(continues on next page)

(continued from previous page)

```
BUGGY: 0
FILTERED: 0
INSTRUMENTED: 52
MISSING: 0
NOT_A_TEST: 27
SIMPLE: 3
VT: 2375
```

Then you can execute one in particular. It's the same idea, just copy the individual test you want and run it:

```
$ avocado run balloon_check --vt-type qemu --vt-guest-os Fedora.21
```

And it'll run that particular test.

---

## Advanced Topics and Maintenance

---

Contents:

### 6.1 How tests are run

When running tests Avocado-VT will:

1. Get a dict with test parameters
2. Based on these params, prepare the environment - create or destroy vm instances, create/check disk images, among others
3. Execute the test itself, that will use several of the params defined to carry on with its operations, that usually involve: - If a test did not raise an exception, it PASSEd - If a test raised a TestFail exception, it FAILED. - If a test raised a TestNAError, it SKIPPED. - Otherwise, it ERRORed.
4. Based on what happened during the test, perform cleanup actions, such as killing vms, and remove unused disk images.

The list of parameters is obtained by parsing a set of configuration files The command line options usually modify even further the parser file, so we can introduce new data in the config set.

### 6.2 Cartesian Configuration

Cartesian Configuration is a highly specialized way of providing lists of key/value pairs within combination's of various categories. The format simplifies and condenses highly complex multidimensional arrays of test parameters into a flat list. The combinatorial result can be filtered and adjusted prior to testing, with filters, dependencies, and key/value substitutions.

The parser relies on indentation, and is very sensitive to misplacement of tab and space characters. It's highly recommended to edit/view Cartesian configuration files in an editor capable of collapsing tab characters into four space characters. Improper attention to column spacing can drastically affect output.

## 6.2.1 Keys and values

Keys and values are the most basic useful facility provided by the format. A statement in the form `<key> = <value>` sets `<key>` to `<value>`. Values are strings, terminated by a newline, with surrounding quotes completely optional (but honored). A reference of descriptions for most keys is included in section Configuration Parameter Reference. The key will become part of all lower-level (i.e. further indented) variant stanzas (see section *variants*). However, key precedence is evaluated in top-down or ‘last defined’ order. In other words, the last parsed key has precedence over earlier definitions.

## 6.2.2 Variants

A ‘variants’ stanza is opened by a ‘variants:’ statement. The contents of the stanza must be indented further left than the ‘variants:’ statement. Each variant stanza or block defines a single dimension of the output array. When a Cartesian configuration file contains two variants stanzas, the output will be all possible combination’s of both variant contents. Variants may be nested within other variants, effectively nesting arbitrarily complex arrays within the cells of outside arrays. For example:

```
variants:
  - one:
    key1 = Hello
  - two:
    key2 = World
  - three:
variants:
  - four:
    key3 = foo
  - five:
    key3 = bar
  - six:
    key1 = foo
    key2 = bar
```

While combining, the parser forms names for each outcome based on prepending each variant onto a list. In other words, the first variant name parsed will appear as the left most name component. These names can become quite long, and since they contain keys to distinguishing between results, a ‘short-name’ key is also used. For example, running `cartesian_config.py` against the content above produces the following combinations and names:

```
dict 1: four.one
dict 2: four.two
dict 3: four.three
dict 4: five.one
dict 5: five.two
dict 6: five.three
dict 7: six.one
dict 8: six.two
dict 9: six.three
```

Variant shortnames represent the `<TESTNAME>` value used when results are recorded (see section Job Names and Tags. For convenience variants who’s name begins with a ‘@’ do not prepend their name to ‘short-name’, only ‘name’. This allows creating ‘shortcuts’ for specifying multiple sets or changes to key/value pairs without changing the results directory name. For example, this is often convenient for providing a collection of related pre-configured tests based on a combination of others.

### 6.2.3 Named variants

Named variants allow assigning a parseable name to a variant set. This enables an entire variant set to be used for in *filters*. All output combinations will inherit the named variant key, along with the specific variant name. For example:

```
variants var1_name:
  - one:
      key1 = Hello
  - two:
      key2 = World
  - three:
variants var2_name:
  - one:
      key3 = Hello2
  - two:
      key4 = World2
  - three:

only (var2_name=one).(var1_name=two)
```

Results in the following outcome when parsed with `cartesian_config.py -c`:

```
dict    1:  (var2_name=one).(var1_name=two)
  dep = []
  key2 = World          # variable key2 from variants var1_name and variant two.
  key3 = Hello2        # variable key3 from variants var2_name and variant one.
  name = (var2_name=one).(var1_name=two)
  shortname = (var2_name=one).(var1_name=two)
  var1_name = two      # variant name in same namespace as variables.
  var2_name = one     # variant name in same namespace as variables.
```

Named variants could also be used as normal variables.:

```
variants guest_os:
  - fedora:
  - ubuntu:
variants disk_interface:
  - virtio:
  - hda:
```

Which then results in the following:

```
dict    1:  (disk_interface=virtio).(guest_os=fedora)
  dep = []
  disk_interface = virtio
  guest_os = fedora
  name = (disk_interface=virtio).(guest_os=fedora)
  shortname = (disk_interface=virtio).(guest_os=fedora)
dict    2:  (disk_interface=virtio).(guest_os=ubuntu)
  dep = []
  disk_interface = virtio
  guest_os = ubuntu
  name = (disk_interface=virtio).(guest_os=ubuntu)
  shortname = (disk_interface=virtio).(guest_os=ubuntu)
dict    3:  (disk_interface=hda).(guest_os=fedora)
  dep = []
  disk_interface = hda
  guest_os = fedora
```

(continues on next page)

(continued from previous page)

```

name = (disk_interface=hda).(guest_os=fedora)
shortname = (disk_interface=hda).(guest_os=fedora)
dict    4: (disk_interface=hda).(guest_os=ubuntu)
dep = []
disk_interface = hda
guest_os = ubuntu
name = (disk_interface=hda).(guest_os=ubuntu)
shortname = (disk_interface=hda).(guest_os=ubuntu)

```

## 6.2.4 Dependencies

Often it is necessary to dictate relationships between variants. In this way, the order of the resulting variant sets may be influenced. This is accomplished by listing the names of all parents (in order) after the child's variant name. However, the influence of dependencies is 'weak', in that any later defined, lower-level (higher indentation) definitions, and/or filters (see section *filters*) can remove or modify dependents. For example, if testing unattended installs, each virtual machine must be booted before, and shutdown after:

```

variants:
- one:
    key1 = Hello
- two: one
    key2 = World
- three: one two

```

Results in the correct sequence of variant sets: one, two, *then* three.

## 6.2.5 Filters

Filter statements allow modifying the resultant set of keys based on the name of the variant set (see section *variants*). Filters can be used in 3 ways: Limiting the set to include only combination names matching a pattern. Limiting the set to exclude all combination names not matching a pattern. Modifying the set or contents of key/value pairs within a matching combination name.

Names are matched by pairing a variant name component with the character(s) ';' meaning OR, '.' meaning AND, and '.' meaning IMMEDIATELY-FOLLOWED-BY. When used alone, they permit modifying the list of key/values previously defined. For example:

```

Linux..OpenSuse:
initrd = initrd

```

Modifies all variants containing 'Linux' followed anywhere thereafter with 'OpenSuse', such that the 'initrd' key is created or overwritten with the value 'initrd'.

When a filter is preceded by the keyword 'only' or 'no', it limits the selection of variant combination's. This is used where a particular set of one or more variant combination's should be considered selectively or exclusively. When given an extremely large matrix of variants, the 'only' keyword is convenient to limit the result set to only those matching the filter. Whereas the 'no' keyword could be used to remove particular conflicting key/value sets under other variant combination names. For example:

```

only Linux..Fedora..64

```

Would reduce an arbitrarily large matrix to only those variants who's names contain Linux, Fedora, and 64 in them.

However, note that any of these filters may be used within named variants as well. In this application, they are only evaluated when that variant name is selected for inclusion (implicitly or explicitly) by a higher-order. For example:

```
variants:
  - one:
    key1 = Hello
variants:
  - two:
    key2 = Complicated
  - three: one two
    key3 = World
variants:
  - default:
    only three
    key2 =

only default
```

Results in the following outcome:

```
name = default.three.one
key1 = Hello
key2 =
key3 = World
```

## 6.2.6 Value Substitutions

Value substitution allows for selectively overriding precedence and defining part or all of a future key's value. Using a previously defined key, its value may be substituted in or as another key's value. The syntax is exactly the same as in the bash shell, where a key's value is substituted in wherever that key's name appears following a '\$' character. When nesting a key within other non-key-name text, the name should also be surrounded by '{', and '}' characters.

Replacement is context-sensitive, thereby if a key is redefined within the same, or, higher-order block, that value will be used for future substitutions. If a key is referenced for substitution, but hasn't yet been defined, no action is taken. In other words, the \$key or \${key} string will appear literally as or within the value. Nesting of references is not supported (i.e. key substitutions within other substitutions).

For example, if `one = 1`, `two = 2`, and `three = 3`; then, `order = ${one}${two}${three}` results in `order = 123`. This is particularly handy for rooting an arbitrary complex directory tree within a predefined top-level directory.

An example of context-sensitivity,

```
key1 = default value
key2 = default value

sub = "key1: ${key1}; key2: ${key2};"

variants:
  - one:
    key1 = Hello
    sub = "key1: ${key1}; key2: ${key2};"
  - two: one
    key2 = World
    sub = "key1: ${key1}; key2: ${key2};"
  - three: one two
    sub = "key1: ${key1}; key2: ${key2};"
```

Results in the following,

```
dict    1:  one
      dep = []
      key1 = Hello
      key2 = default value
      name = one
      shortname = one
      sub = key1: Hello; key2: default value;
dict    2:  two
      dep = ['one']
      key1 = default value
      key2 = World
      name = two
      shortname = two
      sub = key1: default value; key2: World;
dict    3:  three
      dep = ['one', 'two']
      key1 = default value
      key2 = default value
      name = three
      shortname = three
      sub = key1: default value; key2: default value;
```

## 6.2.7 Key sub-arrays

Parameters for objects like VM's utilize array's of keys specific to a particular object instance. In this way, values specific to an object instance can be addressed. For example, a parameter 'vms' lists the VM objects names to instantiate in the current frame's test. Values specific to one of the named instances should be prefixed to the name:

```
vms = vm1 second_vm another_vm
mem = 128
mem_vm1 = 512
mem_second_vm = 1024
```

The result would be, three virtual machine objects are create. The third one (another\_vm) receives the default 'mem' value of 128. The first two receive specialized values based on their name.

The order in which these statements are written in a configuration file is not important; statements addressing a single object always override statements addressing all objects. Note: This is contrary to the way the Cartesian configuration file as a whole is parsed (top-down).

## 6.2.8 Include statements

The 'include' statement is utilized within a Cartesian configuration file to better organize related content. When parsing, the contents of any referenced files will be evaluated as soon as the parser encounters the include statement. The order in which files are included is relevant, and will carry through any key/value substitutions (see section *key\_sub\_arrays*) as if parsing a complete, flat file.

## 6.2.9 Combinatorial outcome

The parser is available as both a python module and command-line tool for examining the parsing results in a text-based listing. To utilize it on the command-line, run the module followed by the path of the configuration file to parse. For example, `common_lib/cartesian_config.py tests/libvirt/tests.cfg`.

The output will be just the names of the combinatorial result set items (see short-names, section Variants). However, the `--contents` parameter may be specified to examine the output in more depth. Internally, the key/value data is stored/accessed similar to a python dictionary instance. With the collection of dictionaries all being part of a python list-like object. Irrespective of the internals, running this module from the command-line is an excellent tool for both reviewing and learning about the Cartesian Configuration format.

In general, each individual combination of the defined variants provides the parameters for a single test. Testing proceeds in order, through each result, passing the set of keys and values through to the harness and test code. When examining Cartesian configuration files, it's helpful to consider the earliest key definitions as "defaults", then look to the end of the file for other top-level override to those values. If in doubt of where to define or set a key, placing it at the top indentation level, at the end of the file, will guarantee it is used.

## 6.2.10 Formal definition

- A list of dictionaries is referred to as a frame.
- The parser produces a list of dictionaries (dicts). Each dictionary contains a set of key-value pairs.
- Each dict contains at least three keys: name, shortname and depend. The values of name and shortname are strings, and the value of depend is a list of strings.
- The initial frame contains a single dict, whose name and shortname are empty strings, and whose depend is an empty list.
- Parsing dict contents
  - The dict parser operates on a frame, referred to as the current frame.
  - A statement of the form `<key> = <value>` sets the value of `<key>` to `<value>` in all dicts of the current frame. If a dict lacks `<key>`, it will be created.
  - A statement of the form `<key> += <value>` appends `<value>` to the value of `<key>` in all dicts of the current frame. If a dict lacks `<key>`, it will be created.
  - A statement of the form `<key> <= <value>` pre-pends `<value>` to the value of `<key>` in all dicts of the current frame. If a dict lacks `<key>`, it will be created.
  - A statement of the form `<key> ?= <value>` sets the value of `<key>` to `<value>`, in all dicts of the current frame, but only if `<key>` exists in the dict. The operators `?+=` and `?<=` are also supported.
  - A statement of the form `no <regex>` removes from the current frame all dicts whose name field matches `<regex>`.
  - A statement of the form `only <regex>` removes from the current frame all dicts whose name field does not match `<regex>`.
- Content exceptions
  - Single line exceptions have the format `<regex>: <key> <operator> <value>` where `<operator>` is any of the operators listed above (e.g. `=`, `+=`, `?<=`). The statement following the regular expression `<regex>` will apply only to the dicts in the current frame whose name partially matches `<regex>` (i.e. contains a substring that matches `<regex>`).
  - A multi-line exception block is opened by a line of the format `<regex>:`. The text following this line should be indented. The statements in a multi-line exception block may be assignment statements (such as `<key> = <value>`) or no or only statements. Nested multi-line exceptions are allowed.
- Parsing Variants
  - A variants block is opened by a `variants:` statement. The indentation level of the statement places the following set within the outer-most context-level when nested within other `variant:` blocks. The contents of the `variants:` block must be further indented.

- A variant-name may optionally follow the `variants` keyword, before the `:` character. That name will be inherited by and decorate all block content as the key for each variant contained in it's the block.
- The name of the variants are specified as - `<variant_name>:.` Each name is pre-pended to the name field of each dict of the variant's frame, along with a separator dot (`'.'`).
- The contents of each variant may use the format `<key> <op> <value>`. They may also contain further `variants: statements`.
- If the name of the variant is not preceeded by a `@` (i.e. - `@<variant_name>`), it is pre-pended to the `shortname` field of each dict of the variant's frame. In other words, if a variant's name is preceeded by a `@`, it is omitted from the `shortname` field.
- Each variant in a `variants` block inherits a copy of the frame in which the `variants: statement` appears. The 'current frame', which may be modified by the dict parser, becomes this copy.
- The frames of the variants defined in the block are joined into a single frame. The contents of frame replace the contents of the outer containing frame (if there is one).

- Filters

- Filters can be used in 3 ways:

```
* only <filter>
```

```
* no <filter>
```

```
* <filter>: starts a conditional block (see section :ref:`filters_`)
```

- Syntax:

```
.. means AND  
. means IMMEDIATELY-FOLLOWED-BY
```

- Example:

```
qcow2..Fedora.14, RHEL.6..raw..boot, smp2..qcow2..migrate..ide
```

```
means match all dicts whose names have:  
(qcow2 AND (Fedora IMMEDIATELY-FOLLOWED-BY 14)) OR  
((RHEL IMMEDIATELY-FOLLOWED-BY 6) AND raw AND boot) OR  
(smp2 AND qcow2 AND migrate AND ide)
```

- Note:

```
'qcow2..Fedora.14' is equivalent to 'Fedora.14..qcow2'.
```

```
'qcow2..Fedora.14' is not equivalent to 'qcow2..14.Fedora'.  
'ide, scsi' is equivalent to 'scsi, ide'.
```

### 6.2.11 Examples

- A single dictionary:

```
key1 = value1
key2 = value2
key3 = value3
```

Results in the following::

```
Dictionary #0:
  depend = []
  key1 = value1
  key2 = value2
  key3 = value3
  name =
  shortname =
```

- Adding a variants block:

```
key1 = value1
key2 = value2
key3 = value3
```

```
variants:
  - one:
  - two:
  - three:
```

Results in the following:

```
Dictionary #0:
  depend = []
  key1 = value1
  key2 = value2
  key3 = value3
  name = one
  shortname = one
Dictionary #1:
  depend = []
  key1 = value1
  key2 = value2
  key3 = value3
  name = two
  shortname = two
Dictionary #2:
  depend = []
  key1 = value1
  key2 = value2
  key3 = value3
  name = three
  shortname = three
```

- Modifying dictionaries inside a variant:

```
key1 = value1
key2 = value2
key3 = value3
```

```
variants:
  - one:
```

(continues on next page)

(continued from previous page)

```

    key1 = Hello World
    key2 <= some_prefix_
- two:
    key2 <= another_prefix_
- three:

```

Results in the following:

```

Dictionary #0:
  depend = []
  key1 = Hello World
  key2 = some_prefix_value2
  key3 = value3
  name = one
  shortname = one
Dictionary #1:
  depend = []
  key1 = value1
  key2 = another_prefix_value2
  key3 = value3
  name = two
  shortname = two
Dictionary #2:
  depend = []
  key1 = value1
  key2 = value2
  key3 = value3
  name = three
  shortname = three

```

- Adding dependencies:

```

key1 = value1
key2 = value2
key3 = value3

variants:
  - one:
    key1 = Hello World
    key2 <= some_prefix_
  - two: one
    key2 <= another_prefix_
  - three: one two

```

Results in the following:

```

Dictionary #0:
  depend = []
  key1 = Hello World
  key2 = some_prefix_value2
  key3 = value3
  name = one
  shortname = one
Dictionary #1:
  depend = ['one']
  key1 = value1
  key2 = another_prefix_value2

```

(continues on next page)

(continued from previous page)

```

key3 = value3
name = two
shortname = two
Dictionary #2:
depend = ['one', 'two']
key1 = value1
key2 = value2
key3 = value3
name = three
shortname = three

```

- Multiple variant blocks:

```

key1 = value1
key2 = value2
key3 = value3

variants:
- one:
    key1 = Hello World
    key2 <= some_prefix_
- two: one
    key2 <= another_prefix_
- three: one two

variants:
- A:
- B:

```

Results in the following:

```

Dictionary #0:
depend = []
key1 = Hello World
key2 = some_prefix_value2
key3 = value3
name = A.one
shortname = A.one
Dictionary #1:
depend = ['A.one']
key1 = value1
key2 = another_prefix_value2
key3 = value3
name = A.two
shortname = A.two
Dictionary #2:
depend = ['A.one', 'A.two']
key1 = value1
key2 = value2
key3 = value3
name = A.three
shortname = A.three
Dictionary #3:
depend = []
key1 = Hello World
key2 = some_prefix_value2
key3 = value3

```

(continues on next page)

(continued from previous page)

```

    name = B.one
    shortname = B.one
Dictionary #4:
    depend = ['B.one']
    key1 = value1
    key2 = another_prefix_value2
    key3 = value3
    name = B.two
    shortname = B.two
Dictionary #5:
    depend = ['B.one', 'B.two']
    key1 = value1
    key2 = value2
    key3 = value3
    name = B.three
    shortname = B.three

```

- Filters, no and only:

```

key1 = value1
key2 = value2
key3 = value3

variants:
  - one:
      key1 = Hello World
      key2 <= some_prefix_
  - two: one
      key2 <= another_prefix_
  - three: one two

variants:
  - A:
      no one
  - B:
      only one,three

```

Results in the following:

```

Dictionary #0:
    depend = ['A.one']
    key1 = value1
    key2 = another_prefix_value2
    key3 = value3
    name = A.two
    shortname = A.two
Dictionary #1:
    depend = ['A.one', 'A.two']
    key1 = value1
    key2 = value2
    key3 = value3
    name = A.three
    shortname = A.three
Dictionary #2:
    depend = []
    key1 = Hello World
    key2 = some_prefix_value2

```

(continues on next page)

(continued from previous page)

```

key3 = value3
name = B.one
shortname = B.one
Dictionary #3:
depend = ['B.one', 'B.two']
key1 = value1
key2 = value2
key3 = value3
name = B.three
shortname = B.three

```

- Short-names:

```

key1 = value1
key2 = value2
key3 = value3

variants:
- one:
    key1 = Hello World
    key2 <= some_prefix_
- two: one
    key2 <= another_prefix_
- three: one two

variants:
- @A:
    no one
- B:
    only one,three

```

Results in the following:

```

Dictionary #0:
depend = ['A.one']
key1 = value1
key2 = another_prefix_value2
key3 = value3
name = A.two
shortname = two
Dictionary #1:
depend = ['A.one', 'A.two']
key1 = value1
key2 = value2
key3 = value3
name = A.three
shortname = three
Dictionary #2:
depend = []
key1 = Hello World
key2 = some_prefix_value2
key3 = value3
name = B.one
shortname = B.one
Dictionary #3:
depend = ['B.one', 'B.two']
key1 = value1

```

(continues on next page)

(continued from previous page)

```

key2 = value2
key3 = value3
name = B.three
shortname = B.three

```

- Exceptions:

```

key1 = value1
key2 = value2
key3 = value3

variants:
  - one:
      key1 = Hello World
      key2 <= some_prefix_
  - two: one
      key2 <= another_prefix_
  - three: one two

variants:
  - @A:
      no one
  - B:
      only one,three

three: key4 = some_value

A:
  no two
  key5 = yet_another_value

```

Results in the following:

```

Dictionary #0:
  depend = ['A.one', 'A.two']
  key1 = value1
  key2 = value2
  key3 = value3
  key4 = some_value
  key5 = yet_another_value
  name = A.three
  shortname = three
Dictionary #1:
  depend = []
  key1 = Hello World
  key2 = some_prefix_value2
  key3 = value3
  name = B.one
  shortname = B.one
Dictionary #2:
  depend = ['B.one', 'B.two']
  key1 = value1
  key2 = value2
  key3 = value3
  key4 = some_value
  name = B.three
  shortname = B.three

```

## 6.2.12 Default Configuration Files

The test configuration files are used for controlling the framework, by specifying parameters for each test. The parser produces a list of key/value sets, each set pertaining to a single test. Variants are organized into separate files based on scope and/or applicability. For example, the definitions for guest operating systems is sourced from a shared location since all virtualization tests may utilize them.

For each set/test, keys are interpreted by the test dispatching system, the pre-processor, the test module itself, then by the post-processor. Some parameters are required by specific sections and others are optional. When required, parameters are often commented with possible values and/or their effect. There are select places in the code where in-memory keys are modified, however this practice is discouraged unless there's a very good reason.

When `avocado vt-bootstrap --vt-type [type]` is executed (see section *Bootstrapping Avocado-VT*), copies of the sample configuration files are copied for use under the `backends/[type]/cfg` subdirectory of the virtualization technology-specific directory. For example, `backends/qemu/cfg/base.cfg`.

Relative Directory or File	Description
<code>cfg/tests.cfg</code>	The first file read that includes all other files, then the master set of filters to select the actual test set to be run. Normally this file never needs to be modified unless precise control over the test-set is needed when utilizing the autotest-client (only).
<code>cfg/tests-shared.cfg</code>	Included by <code>tests.cfg</code> to indirectly reference the remaining set of files to include as well as set some global parameters. It is used to allow customization and/or insertion within the set of includes. Normally this file never needs to be modified.
<code>cfg/base.cfg</code>	Top-level file containing important parameters relating to all tests. All keys/values defined here will be inherited by every variant unless overridden. This is the <i>first</i> file to check for settings to change based on your environment
<code>cfg/build.cfg</code>	Configuration specific to pre-test code compilation where required/requested. Ignored when a client is not setup for build testing.
<code>cfg/subtests.cfg</code>	Automatically generated based on the test modules and test configuration files found when the <code>avocado vt-bootstrap</code> is used. Modifications are discouraged since they will be lost next time bootstrap is used.
<code>cfg/guest-os.cfg</code>	Automatically generated when <code>avocado vt-bootstrap</code> is used from files within <code>shared/cfg/guest-os/</code> . Defines all supported guest operating system types, architectures, installation images, parameters, and disk device or image names.
<code>cfg/guest-hw.cfg</code>	All virtual and physical hardware related parameters are organized within variant names. Within subtest variants or the top-level test set definition, hardware is specified by Including, excluding, or filtering variants and keys established in this file.
<code>cfg/cdkeys.cfg</code>	Certain operating systems require non-public information in order to operate and or install properly. For example, installation numbers and license keys. None of the values in this file are populated automatically. This file should be edited to supply this data for use by the unattended install test.
<code>cfg/virtio-win.cfg</code>	Paravirtualized hardware when specified for Windows testing, must have dependent drivers installed as part of the OS installation process. This file contains mandatory variants and keys for each Windows OS version, specifying the host location and installation method for each driver.

## 6.3 Building test applications

This is a description of how to build test applications from a test case.

### 6.3.1 Dependencies

If you write an application that is supposed to be run on the test-target, place it in the directory `./deps/<name>/` relative to where your test case is placed. The easiest way to obtain the full path to this directory is by calling `data_dir.get_deps_dir("<name>")`. Don't forget to add `from virttest import data_dir` to your test case.

Besides the source file, create a Makefile that will be used to build your test application. The below example shows a Makefile for the application for the `timedrift` test cases. The `remote_build` module requires that a Makefile is included with all test applications.

```
CFLAGS+--Wall
LDLIBS+--lrt

.PHONY: clean

all: clktest get_tsc

clktest: clktest.o

get_tsc: get_tsc.o

clean:
    rm -f clktest get_tsc
```

### 6.3.2 remote\_build

To simplify the building of applications on target, and to simplify avoiding the building of applications on target when they are installed pre-built, use the `remote_build` module. This module handles both the transfer of files, and running `make` on target.

A simple example:

```
address = vm.get_address(0)
source_dir = data_dir.get_deps_dir("<testapp>")
builder = remote_build.Builder(params, address, source_dir)
full_build_path = builder.build()
```

In this case, we utilize the `.build()` method, which execute the necessary methods in `builder` to copy all files to target and run `make` (if needed). When done, `.build()` will return the full path on target to the application that was just built. Be sure to use this path when running your test application, as the path is changed if the parameters of the build is changed. For example:

```
session.cmd_status("%s --test" % os.path.join(full_build_path, "testapp"))
```

The `remote_build.Builder` class can give you fine-grained control over your build process as well. Another way to write the above `.build()` invocation above is:

```
builder = remote_build.Builder(params, address, source_dir)
if builder.sync_directories():
    builder.make()
full_build_path = builder.full_build_path
```

This pattern can be useful if you e.g. would like to add an additional command to run before `builder.make()`, perhaps to install some extra dependencies.

## 6.4 Networking

Here we have notes about networking setup in Avocado-VT.

### 6.4.1 Configuration

How to configure to allow all the traffic to be forwarded across the virbr0 bridge: Execute the command

```
$ echo "-I FORWARD -m physdev --physdev-is-bridged -j ACCEPT" > /etc/sysconfig/
→iptables-forward-bridged
$ lokkit --custom-rules=ipv4:filter:/etc/sysconfig/iptables-forward-bridged
$ service libvirtd reload
```

#### Configure Static IP address in Avocado-VT

Sometimes, we need to test with guest(s) which have static ip address(es).

- e.g. No real/emulated DHCP server in test environment.
- e.g. Test with old image we don't want to change the net config.
- e.g. Test when DHCP exists problem.

Create a bridge (for example, 'vbr') in host, configure its ip to 192.168.100.1, guest can access host by it. And assign nic(s) ip in tests.cfg, and execute test as usual.

tests.cfg:

```
ip_nic1 = 192.168.100.119
nic_mac_nic1 = 11:22:33:44:55:67
bridge = vbr
```

### 6.4.2 TestCases

#### Ntttcp

The Ntttcp test suite is a network performance test for windows, developed by Microsoft. It is *not* a freely redistributable binary, so you must download it from the website, here's the direct link for download (keep in mind it might change):

<https://gallery.technet.microsoft.com/NTttcp-Version-528-Now-f8b12769>

The knowledge base article associated with it is:

<http://msdn.microsoft.com/en-us/windows/hardware/gg463264>

You need to add the package to winutils.iso, the iso with utilities used to test windows. First, download the iso. *The get started documentation* can help you out with downloading if you like it, but the direct download link is here:

<https://avocado-project.org/data/assets/winutils.iso>

You need to put all its contents on a folder and create a new iso. Let's say you want to download the iso to /home/kermit/Downloads/winutils.iso. You can create the directory, go to it:

```
$ mkdir -p /home/kermit/Downloads
$ cd /home/kermit/Downloads
```

Download the iso, create 2 directories, 1 for the mount, another for the contents:

```
$ wget https://avocado-project.org/data/assets/winutils.iso
$ mkdir original
$ sudo mount -o loop winutils.iso original
$ mkdir winutils
```

Copy all contents from the original cd to the new structure:

```
$ cp -r original/* winutils/
```

Create the destination ntttcp directory on that new structure:

```
$ mkdir -p winutils/NTttcp
```

Download the installer and copy autoit script to the new structure, unmount the original mount:

```
$ cd winutils/NTttcp
$ wget https://gallery.technet.microsoft.com/NTttcp-Version-528-Now-f8b12769/file/
↳159655/1/NTttcp-v5.33.zip -O "winutils/NTttcp/NTttcp-v5.33.zip"
$ cp /usr/local/autotest/client/virt/scripts/ntttcp.au3 ./
$ sudo umount original
```

Backup the old winutils.iso and create a new winutils.iso using mkisofs:

```
$ sudo mv winutils.iso winutils.iso.bak
$ mkisofs -o winutils.iso -max-iso9660-filenames -relaxed-filenames -D --input-
↳charset iso8859-1 winutils
```

And that is it. Don't forget to keep winutils in an appropriate location that can be seen by Avocado-VT.

## 6.5 Performance Testing

### 6.5.1 Performance subtests

#### network

- netperf (linux and windows)
- ntttcp (windows)

#### block

- iozone (linux)
- iozone (windows) (iozone has its own result analysis module)
- iometer (windows) (not push upstream)
- ffsb (linux)
- qemu\_iotests (host)
- fio (linux)

## 6.5.2 Environment setup

Autotest already supports prepare environment for performance testing, guest/host need to be reboot for some configuration. [setup script](#)

Autotest supports to numa pinning. Assign “numanode=-1” in tests.cfg, then vcpu threads/vhost\_net threads/VM memory will be pinned to last numa node. If you want to pin other processes to numa node, you can use numactl and taskset.

```
memory:
$ numactl -m $n $cmdline
cpu:
$ taskset $node_mask $thread_id
```

The following content is manual guide.

```
1.First level pinning would be to use numa pinning when starting the guest.
e.g. $ numactl -c 1 -m 1 qemu-kvm -smp 2 -m 4G <> (pinning guest memory and cpus to
↳numa-node 1)

2.For a single instance test, it would suggest trying a one to one mapping of vcpu to
↳physical core.
e.g.
get guest vcpu threads id
$ taskset -p 40 $vcpus1 #(pinning vcpu1 thread to physical cpu #6 )
$ taskset -p 80 $vcpus2 #(pinning vcpu2 thread to physical cpu #7 )

3.To pin vhost on host. get vhost PID and then use taskset to pin it on the same
↳socket.
e.g
$ taskset -p 20 $vhost #(pinning vcpu2 thread to physical cpu #5 )

4.In guest, pin the IRQ to one core and the netperf to another.
1) make sure irqbalance is off - ` $ service irqbalance stop `
2) find the interrupts - ` $ cat /proc/interrupts `
3) find the affinity mask for the interrupt(s) - ` $ cat /proc/irq/<irq#>/smp_affinity `
4) change the value to match the proper core.make sure the vlaue is cpu mask.
e.g. pin the IRQ to first core.
    $ echo 01>/proc/irq/$vrti0-input/smp_affinity
    $ echo 01>/proc/irq/$vrti0-output/smp_affinity
5)pin the netserver to another core.
e.g.
$ taskset -p 02 netserver

5.For host to guest scenario. to get maximum performance. make sure to run netperf on
↳different cores on the same numa node as the guest.
e.g.
$ numactl -m 1 netperf -T 4 (pinning netperf to physical cpu #4)
```

## 6.5.3 Execute testing

- Submit jobs in Autotest server, only execute netperf.guset\_exhost for three times.

tests.cfg:

```
only netperf.guest_exhost
variants:
- repeat1:
```

(continues on next page)

(continued from previous page)

```

- repeat2:
- repeat3:
# vbr0 has a static ip: 192.168.100.16
bridge=vbr0
# virbr0 is created by libvirtd, guest nic2 get ip by dhcp
bridge_nic2 = virbr0
# guest nic1 static ip
ip_nic1 = 192.168.100.21
# external host static ip:
client = 192.168.100.15

```

Result files:

```

$ cd /usr/local/autotest/results/8-debug_user/192.168.122.1/
$ find .|grep RHS
kvm.repeat1.r61.virtio_blk.smp2.virtio_net.RHEL.6.1.x86_64.netperf.exhost_guest/
↪results/netperf-result.RHS
kvm.repeat2.r61.virtio_blk.smp2.virtio_net.RHEL.6.1.x86_64.netperf.exhost_guest/
↪results/netperf-result.RHS
kvm.repeat3.r61.virtio_blk.smp2.virtio_net.RHEL.6.1.x86_64.netperf.exhost_guest/
↪results/netperf-result.RHS

```

- Submit same job in another env (different packages) with same configuration

Result files:

```

$ cd /usr/local/autotest/results/9-debug_user/192.168.122.1/
$ find .|grep RHS
kvm.repeat1.r61.virtio_blk.smp2.virtio_net.RHEL.6.1.x86_64.netperf.exhost_guest/
↪results/netperf-result.RHS
kvm.repeat2.r61.virtio_blk.smp2.virtio_net.RHEL.6.1.x86_64.netperf.exhost_guest/
↪results/netperf-result.RHS
kvm.repeat3.r61.virtio_blk.smp2.virtio_net.RHEL.6.1.x86_64.netperf.exhost_guest/
↪results/netperf-result.RHS

```

## 6.5.4 Analysis result

Config file: perf.conf

```

[ntttcp]
result_file_pattern = *.RHS
ignore_col = 1
avg_update =

[netperf]
result_file_pattern = *.RHS
ignore_col = 2
avg_update = 4,2,3|14,5,12|15,6,13

[iozone]
result_file_pattern =

```

Execute regression.py to compare two results:

```
login autotest server
$ cd /usr/local/autotest/client/tools
$ python regression.py netperf /usr/local/autotest/results/8-debug_user/192.168.122.1/
↪ /usr/local/autotest/results/9-debug_user/192.168.122.1/
```

T-test:

- scipy: <http://www.scipy.org/>
- t-test: [http://en.wikipedia.org/wiki/Student's\\_t-test](http://en.wikipedia.org/wiki/Student's_t-test)
- Two python modules (scipy and numpy) are needed.
- Script to install numpy/scipy on rhel6 automatically: <https://github.com/kongove/misc/blob/master/scripts/install-numpy-scipy.sh>

Unpaired T-test is used to compare two samples, user can check p-value to know if regression bug exists. If the difference of two samples is considered to be not statistically significant ( $p \leq 0.05$ ), it will add a '+' or '-' before p-value. ('+' :  $\text{avg\_sample1} < \text{avg\_sample2}$ , '-' :  $\text{avg\_sample1} > \text{avg\_sample2}$ )

- - only over 95% confidence results will be added "+/-" in "Significance" part.
- + for cpu-usage means regression, "+" for throughput means improvement."

## 6.5.5 Regression results

- Every Avg line represents the average value based on  $n$  repetitions of the same test, and the following SD line represents the Standard Deviation between the  $n$  repetitions.
- The Standard deviation is displayed as a percentage of the average.
- The significance of the differences between the two averages is calculated using unpaired T-test that takes into account the SD of the averages.
- The paired t-test is computed for the averages of same category.
- only over 95% confidence results will be added "+/-" in "Significance" part. "+" for cpu-usage means regression, "+" for throughput means improvement.

Highlight HTML result

- green/red → good/bad
- Significance is larger than 0.95 → green
- dark green/red → important (eg: cpu)
- light green/red → other
- test time
- version (only when diff)
- other: repeat time, title
- user light green/red to highlight small (< %5) DIFF
- highlight Significance with same color in one row
- add doc link to result file, and describe color in doc

[netperf.avg.html](#) - Raw data that the averages are based on.

## 6.6 Setup a virtual environment for multi host tests

### 6.6.1 Problem:

For multi-host tests multiple physical systems are often required. It is possible to use two virtual guests for most of autotest tests except for Avocado-VTs (kvm, libvirt, ...).

However, It is possible to use Nested Virtualization to serve as first level (L0) guests and run nested guests inside them.

This page explains, how to setup (Fedora/RHEL) and use single computer with nested virtualization for such cases. Be careful that nested virtualization works usually right, but there are cases where it might lead to hidden problems. Do not use nested virtualization for production testing.

### 6.6.2 Nested Virtualization:

#### 1. Emulated:

- qemu very slow

#### 2. Hardware accelerated:

- Hardware for the accelerated nested virtualization AMD Phenom and never core extension (smv, NPT) Intel Nehalem and never core extension (vmx, EPT)
- Software which supports the accelerated nested virtualization kvm, xen, vmware, .... almost the same speed like native guest (1.0-0.1 of native quest performance). Performance depends on the type of load. IO load could be quite slow. Without vt-d or AMD-Vi and network device pass through.

### 6.6.3 Configuration for multi-host virt tests:

#### 6.6.4 Config of host system

- Intel CPU

```
options kvm_intel nested=1 to the end of some modules config file
/etc/modprobe.d/modules.conf
```

- AMD CPU

```
options kvm_amd nested=1 to the end of some modules config file
/etc/modprobe.d/modules.conf
```


#### 6.6.5 Config of Guest L0

- Intel CPU

- **Virtual manager** Procesor config->CPU Features->vmx set to require
- **Native qemu-kvm** qemu-kvm -cpu core2duo,+vmx -enable-kvm .....

- AMD CPU

- **Virtual manager** Procesor config->CPU Features->svm set to require
- **Native qemu-kvm** qemu-kvm -cpu qemu64,+svm -enable-kvm .....

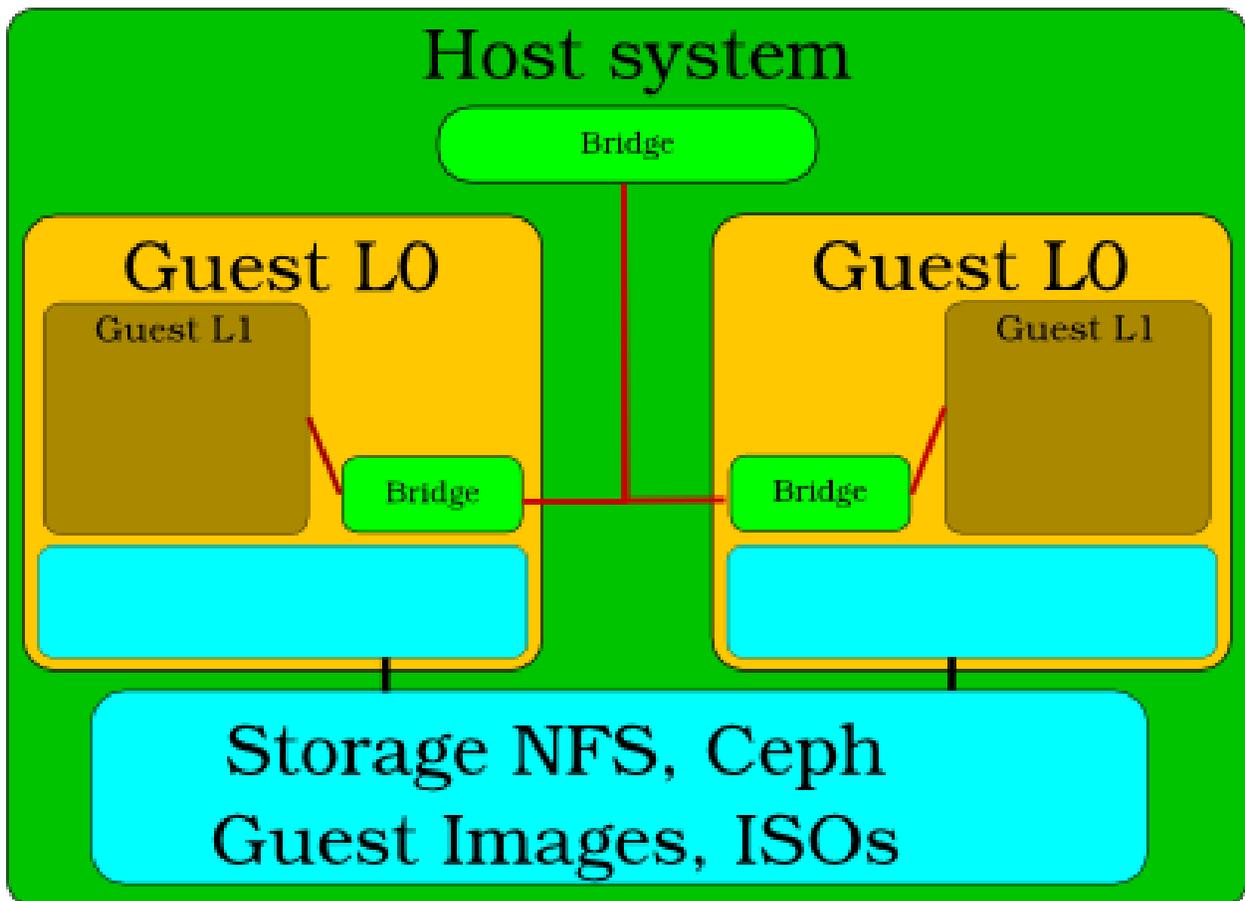

## 6.6.6 Config of Guest L0 System

Connect to host bridge with guest L0 bridge without DHCP (dhcp collision with host system dhcp).

1. Destroy libvirt bridge which contain dhcp.
2. Enable network service `systemctl enable network.service`
3. Add new bridge `virbr0` manually and insert to them L0 network adapter `eth0` which is connected to host bridge

```
# interface connected to host system bridge
$ vi /etc/sysconfig/network-scripts/ifcfg-eth0
    NM_CONTROLLED="no"
    DEVICE="eth0"
    ONBOOT="yes"
    BRIDGE=virbr0

# Bridge has name virbr0 for compatibility with standard autotest settings.
$ vi /etc/sysconfig/network-scripts/ifcfg-virbr0
    DHCP_HOSTNAME="atest-guest"
    NM_CONTROLLED="no"
    BOOTPROTO="dhcp"
    ONBOOT="yes"
    IPV6INIT="no"
    DEVICE=virbr0
    TYPE=Bridge
    DELAY=0
```

and for sure disable NetworkManager `systemctl disable NetworkManager.service`

## 6.6.7 Check Guest L0 System

`modprobe kvm-intel` or `modprobe kvm-amd` should work

## 6.6.8 Start for multi-host virt tests:

### 6.6.9 Manually from host machine

```
$ cd autotest/client/tests/virt/qemu/
$ sudo rm -rf results.*; sudo ../../../../server/autoserv -m guestL0_1,guestL0_2_
↪multi_host.srv
```

## 6.6.10 More details:

Set up/configuration, the root directory (of this git repo) also has simple scripts to create L1 and L2 guests. And reference of L1, L2 libvirt files are also added – <https://github.com/kashyapc/nvmx-haswell/blob/master/SETUP-nVMX.rst>

## 6.7 Multi Host Migration Tests

### 6.7.1 Running Multi Host Migration Tests

Avocado-VT is our test suite, but for simplicity purposes it can only run on a single host. For multi host tests, you'll need the full autotest + Avocado-VT package, and the procedure is more complex. We'll try to keep this procedure as objective as possible.

### 6.7.2 Prerequisites

This guide assumes that:

1. You have at least 2 virt capable machines that have shared storage setup in [insert specific path]. Let's call them `host1.foo.com` and `host2.foo.com`.
2. You can ssh into both of those machines without a password (which means there is an SSH key setup with the account you're going to use to run the tests) as root.
3. The machines should be able to communicate freely, so beware of the potential firewall complications. On each of those machines you need a specific NFS mount setup:
  - `/var/lib/virt_test/isos`
  - `/var/lib/virt_test/steps_data`
  - `/var/lib/virt_test/gpg`

They all need to be backed by an NFS share read only. Why read only? Because it is safer, we exclude the chance to delete this important data by accident. Besides the data above is only needed in a read only fashion. fstab example:

```
myserver.foo.com:/virt-test/iso /var/lib/virt_test/isos nfs ro,nosuid,nodev,noatime,
↪intr,hard,tcp 0 0
myserver.foo.com:/virt-test/steps_data /var/lib/virt_test/steps_data nfs rw,nosuid,
↪nodev,noatime,intr,hard,tcp 0 0
myserver.foo.com:/virt-test/gpg /var/lib/virt_test/gpg nfs rw,nosuid,nodev,noatime,
↪intr,hard,tcp 0 0
```

- `/var/lib/virt_test/images`
- `/var/lib/virt_test/images_archive`

Those all need to be backed by an NFS share read write (or any other shared storage you might have). This is necessary because both hosts need to see the same coherent storage. fstab example:

```
myserver.foo.com:/virt-test/images_archive /var/lib/virt_test/images_archive nfs rw,
↪nosuid,nodev,noatime,intr,hard,tcp 0 0
myserver.foo.com:/virt-test/images /var/lib/virt_test/images nfs rw,nosuid,nodev,
↪noatime,intr,hard,tcp 0 0
```

The images dir must be populated with the installed guests you want to run your tests on. They must match the file names used by guest OS in Avocado-VT. For example, for RHEL 6.4, the image name Avocado-VT uses is:

```
rhel64-64.qcow2
```

double check your files are there:

```
$ ls /var/lib/virt_test/images
$ rhel64-64.qcow2
```

### 6.7.3 Setup step by step

First, clone the autotest repo recursively. It's a repo with lots of submodules, so you'll see a lot of output:

```
$ git clone --recursive https://github.com/autotest/autotest.git
... lots of output ...
```

Then, edit the `global_config.ini` file, and change the key:

```
serve_packages_from_autoserv: True
```

to:

```
serve_packages_from_autoserv: False
```

Then you need to update Avocado-VT's config files and sub tests (that live in separate repositories that are not git submodules). You don't need to download the JeOS file in this step, so simply answer 'n' to the quest

Note: The bootstrap procedure described below will be performed automatically upon running the `autoserv` command that triggers the test. The problem is that then you will not be able to see the config files and modify filters prior to actually running the test. Therefore this documentation will instruct you to run the steps below manually.

```
16:11:14 INFO | qemu test config helper
16:11:14 INFO |
16:11:14 INFO | 1 - Updating all test providers
16:11:14 INFO | Fetching git [REP 'git://github.com/autotest/tp-qemu.git' BRANCH
↳ 'master'] -> /var/tmp/autotest/client/tests/virt/test-providers.d/downloads/io-
↳ github-autotest-qemu
16:11:17 INFO | git commit ID is 6046958afalccab7f22bb1a1a73347d9c6ed3211 (no tag,
↳ found)
16:11:17 INFO | Fetching git [REP 'git://github.com/autotest/tp-libvirt.git' BRANCH
↳ 'master'] -> /var/tmp/autotest/client/tests/virt/test-providers.d/downloads/io-
↳ github-autotest-libvirt
16:11:19 INFO | git commit ID is edc07c0c4346f9029930b062c573ff6f5433bc53 (no tag,
↳ found)
16:11:20 INFO |
16:11:20 INFO | 2 - Checking the mandatory programs and headers
16:11:20 INFO | /usr/bin/xz
16:11:20 INFO | /usr/sbin/tcpdump
16:11:20 INFO | /usr/bin/nc
16:11:20 INFO | /sbin/ip
16:11:20 INFO | /sbin/arping
16:11:20 INFO | /usr/bin/gcc
16:11:20 INFO | /usr/include/bits/unistd.h
16:11:20 INFO | /usr/include/bits/socket.h
16:11:20 INFO | /usr/include/bits/types.h
16:11:20 INFO | /usr/include/python2.6/Python.h
16:11:20 INFO |
16:11:20 INFO | 3 - Checking the recommended programs
16:11:20 INFO | Recommended command missing. You may want to install it if not,
↳ building it from source. Aliases searched: ('qemu-kvm', 'kvm')
16:11:20 INFO | Recommended command qemu-img missing. You may want to install it if,
↳ not building from source.
16:11:20 INFO | Recommended command qemu-io missing. You may want to install it if,
↳ not building from source.
16:11:20 INFO |
16:11:20 INFO | 4 - Verifying directories
16:11:20 INFO |
```

(continues on next page)

(continued from previous page)

```

16:11:20 INFO | 5 - Generating config set
16:11:20 INFO |
16:11:20 INFO | 6 - Verifying (and possibly downloading) guest image
16:11:20 INFO | File JeOS 19 x86_64 not present. Do you want to download it? (y/n) n
16:11:30 INFO |
16:11:30 INFO | 7 - Checking for modules kvm, kvm-amd
16:11:30 WARNI| Module kvm is not loaded. You might want to load it
16:11:30 WARNI| Module kvm-amd is not loaded. You might want to load it
16:11:30 INFO |
16:11:30 INFO | 8 - If you wish, take a look at the online docs for more info
16:11:30 INFO |
16:11:30 INFO | https://github.com/autotest/virt-test/wiki/GetStarted

```

Then you need to copy the multihost config file to the appropriate place:

```

cp client/tests/virt/test-providers.d/downloads/io-github-autotest-qemu/qemu/cfg/
↪multi-host-tests.cfg client/tests/virt/backends/qemu/cfg/

```

Now, edit the file:

```

server/tests/multihost_migration/control.srv

```

In there, you have to change the EXTRA\_PARAMS to restrict the number of guests you want to run the tests on. On this example, we're going to restrict our tests to RHEL 6.4. The particular section of the control file should look like:

```

EXTRA_PARAMS = """
only RHEL.6.4.x86_64
"""

```

It is important to stress that the guests must be installed for this to work smoothly. Then the last step would be to run the tests. Using the same convention for the machine hostnames, here's the command you should use:

```

$ server/autotest-remote -m host1.foo.com,host2.foo.com server/tests/multihost_
↪migration/control.srv

```

Now, you'll see a boatload of output from the autotest remote output. This is normal, and you should be patient until all the tests are done.

## Writing Multi Host Migration tests

### Scheme:

Source file for the diagram above (LibreOffice file)

### Example:


```

class TestMultihostMigration(virt_utils.MultihostMigration):
    def __init__(self, test, params, env):
        super(testMultihostMigration, self).__init__(test, params, env)

    def migration_scenario(self):
        srchost = self.params.get("hosts")[0]
        dsthost = self.params.get("hosts")[1]

```

(continues on next page)

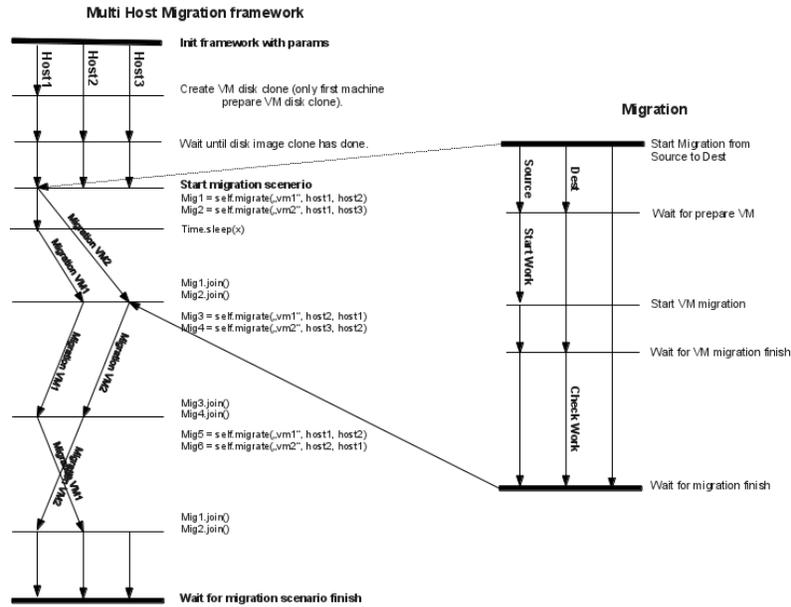

(continued from previous page)

```
def worker(mig_data):
    vm = env.get_vm("vm1")
    session = vm.wait_for_login(timeout=self.login_timeout)
    session.sendline("nohup dd if=/dev/zero of=/dev/null &")
    session.cmd("killall -0 dd")

def check_worker(mig_data):
    vm = env.get_vm("vm1")
    session = vm.wait_for_login(timeout=self.login_timeout)
    session.cmd("killall -9 dd")

# Almost synchronized migration, waiting to end it.
# Work is started only on first VM.

self.migrate_wait(["vm1", "vm2"], srchost, dsthost,
                 worker, check_worker)

# Migration started in different threads.
# It allows to start multiple migrations simultaneously.

# Starts one migration without synchronization with work.
mig1 = self.migrate(["vm1"], srchost, dsthost,
                   worker, check_worker)

time.sleep(20)

# Starts another test simultaneously.
mig2 = self.migrate(["vm2"], srchost, dsthost)
# Wait for mig2 finish.
mig2.join()
```

(continues on next page)

(continued from previous page)

```

mig1.join()

mig = TestMultihostMigration(test, params, env)
# Start test.
mig.run()

```

When you call:

```

mig = TestMultihostMigration(test, params, env)

```

What happens is

1. VM's disks will be prepared.
2. The synchronization server will be started.
3. All hosts will be synchronized after VM create disks.

When you call the method:

```

migrate()

```

What happens in a diagram is:

source	destination
It prepare VM if machine is not started.	
Start work on VM.	
mig.migrate_vms_src()	mig.migrate_vms_dest()
Check work on VM after migration.	
Wait for finish migration on all hosts.	

It's important to note that the migrations are made using the `tcp` protocol, since the others don't support multi host migration.

```

def migrate_vms_src(self, mig_data):
    vm = mig_data.vms[0]
    logging.info("Start migrating now...")
    vm.migrate(mig_data.dst, mig_data.vm_ports)

```

This example migrates only the first machine defined in migration. Better example is in `virt_utils.MultihostMigration.migrate_vms_src`. This function migrates all machines defined for migration.

## 6.8 Links with downloadable images for virt tests

This is a central location that we aim to keep up to date with locations of iso files that might be needed for testing.

Update: Now we have a central location to define such downloads. In the source tree:

```

shared/downloads/

```

Contains a bunch of `.ini` files, each one with download definitions. It is expected that this will be more up to date than this page. You can see the available downloads and download the files using:

```

scripts/download_manager.py

```

### 6.8.1 Winutils ISO

The windows utils file can be currently found at:

<https://avocado-project.org/data/assets/winutils.iso>

#### How to update *winutils.iso*

That's basically a collection of files useful for windows testing. If you want to update that file, you'll have to pick that iso file, extract it to a directory, make changes, remaster the iso and upload back to the main location.

### 6.8.2 Windows virtio drivers ISO

In Avocado we mainly use fedora/RHEL based windows virtio drivers ISO that can be obtained from:

<https://docs.fedoraproject.org/en-US/quick-docs/creating-windows-virtual-machines-using-virtio-drivers/index.html>

### 6.8.3 JeOS image

You can find the JeOS images currently available here:

<https://avocado-project.org/data/assets/jeos-23-64.qcow2.xz>

[https://avocado-project.org/data/assets/SHA1SUM\\_JEOS23\\_XZ](https://avocado-project.org/data/assets/SHA1SUM_JEOS23_XZ)

You can browse through <https://avocado-project.org/data/assets/jeos/> and find other JeOS versions available.

#### How to update JeOS

The JeOS can be updated by installing it, just like a normal OS. You can do that for example with `avocado-vt`, selecting an unattended install test. In this example, we're going to use the unattended install using https kickstart and network install:

```
$ avocado run io-github-autotest-qemu.unattended_install.url.http_ks.default_install.  
↪ aio_native
```

The JeOS kickstart has a trick to fill the qcow2 image with zeros, so that we can squeeze these zeros later with `qemu img`. Once the image is installed, you can use our helper script, located at `scripts/package_jeos.py` in the `avocado-vt` source tree. That script uses `qemu-img` to trim the zeros of the image, ensuring that the resulting qcow2 image is the smallest possible. The command is similar to:

```
$ qemu-img convert -f qcow2 -O qcow2 jeos-file-backup.qcow2 jeos-file.qcow2
```

Then it'll compress it using `xz`, to save space and speed up downloads for `avocado-vt` users. The command is similar to:

```
$ xz jeos-file.qcow2.xz jeos-file.qcow2
```

As mentioned, the script is supposed to help you with the process.

## 6.9 GlusterFS support

GlusterFS is an open source, distributed file system capable of scaling to several petabytes (actually, 72 brontobytes!) and handling thousands of clients. GlusterFS clusters together storage building blocks over Infiniband RDMA or TCP/IP interconnect, aggregating disk and memory resources and managing data in a single global namespace. GlusterFS is based on a stackable user space design and can deliver exceptional performance for diverse workloads.

More details of GlusterFS can be found under

<https://www.gluster.org/>

GlusterFS is added as a new block backend for qemu and to make use of this feature we require the following components.

More details of GlusterFS-QEMU Integration can be found under

<http://raobharata.wordpress.com/2012/10/29/qemu-glusterfs-native-integration/>

1. Qemu- 1.3, 03Dec2012
2. GlusterFS-3.4
3. Libvirt-1.0.1, 15Dec2012

### 6.9.1 How to use in Avocado-VT

You can use Avocado-VT to test GlusterFS support with following steps.

1. Edit `qemu/cfg/tests.cfg` with following changes,

```
only glusterfs_support
remove 'only no_glusterfs_support' line from the file
```

- 2) Optionally, edit `shared/cfg/guest-hw.cfg` for the gluster volume name and brick path, default is going to be,

```
gluster_volume_name = test-vol
gluster_brick = /tmp/gluster
```

### 6.9.2 How to use manually

The following is just an example to show how we create gluster volume and run a guest on that volume manually.

### 6.9.3 Starting Gluster daemon

```
$ service glusterd start
```

### 6.9.4 Gluster volume creation

```
$ gluster volume create [volume-name] [hostname/host_ip]:/[brick_path]
```

E.g.: `gluster volume create test-vol satheesh.ibm.com://home/satheesh/images_gluster`

## 6.9.5 Qemu img creation

```
$ qemu-img create gluster://[hostname]:0/[volume-name]/[image-name] [size]
```

E.g.: `qemu-img create gluster://satheesh.ibm.com:0/test-vol/test_gluster.img 10G`

## 6.9.6 Example of qemu cmd Line

```
$ qemu-system-x86_64 --enable-kvm -smp 4 -m 2048 -drive file=gluster://satheesh.ibm.com/test-vol/test_gluster.img,if=virtio -net nic,macaddr=52:54:00:09:0a:0b -net tap,script=/path/to/qemu-ifupVirsh
```

## 6.10 Setting up a Regression Test Farm for KVM

You have all upstream code, and you're wondering if the internal Red Hat testing of KVM has a lot of internal 'secret sauce'. No, it does not.

However, it is a complex endeavor, since there are *lots* of details involved. The farm setup and maintenance is not easy, given the large amounts of things that can fail (machines misbehave, network problems, git repos unavailable, so on and so forth). *You have been warned.*

With all that said, we'll share what we have been doing. We did clean up our config files and extensions and released them upstream, together with this procedure, that we hope it will be useful to you guys. Also, this will cover KVM testing on a single host, as tests involving multiple hosts and Libvirt testing are a work in progress.

The basic steps are:

1. Install an autotest server.
2. Add machines to the server (test nodes). Those machines are the virt hosts that will be tested.
3. Prepare the virt test jobs and schedule them.
4. Set up cobbler in your environment so you can install hosts.
5. Lots of trial and error until you get all little details sorted out.

We took years repeating all the steps above and perfecting the process, and we are willing to document it all to the best extent possible. I'm afraid however, that you'll have to do your homework and adapt the procedure to your environment.

### 6.10.1 Some conventions

We are assuming you will install autotest to its default upstream location

`/usr/local/autotest`

Therefore a lot of paths referred here will have this as the base dir.

### 6.10.2 CLI vs Web UI

During this text, we'll use frequently the terms CLI and Web UI.

By CLI we mean specifically the program:

/usr/local/autotest/cli/autotest-rpc-client

That is located in the autotest code checkout.

By Web UI, we mean the web interface of autotest, that can be accessed through

<http://your-autotest-server.com/afe>

### 6.10.3 Step 1 - Install an autotest server

Provided that you have internet on your test lab, this should be the easiest step. Pick up either a VM accessible in your lab, or a bare metal machine (it really doesn't make a difference, we use a VM here). We'll refer it from now on as the "Server" box.

The hard drive of the Server should hold enough room for test results. We found out that at least 250 GB holds data for more than 6 months, provided that QEMU doesn't crash a lot.

You'll follow the procedure described on

<https://github.com/autotest/autotest/wiki/AutotestServerInstallRedHat>

for Red Hat derivatives (such as Fedora and RHEL), and

<https://github.com/autotest/autotest/wiki/AutotestServerInstall>

for Debian derivatives (Debian, Ubuntu).

Note that using the install script referred right in the beginning of the documentation is the preferred method, and should work pretty well if you have internet on your lab. In case you don't have internet there, you'd need to follow the instructions after the 'installing with the script' instructions. Let us know if you have any problems.

### 6.10.4 Step 2 - Add test machines

It should go without saying, but the machines you have to add have to be virtualization capable (support KVM).

You can add machines either by using the CLI or the Web UI, following the documentation:

<https://github.com/autotest/autotest/wiki/ConfiguringHosts>

If you don't want to read that, I'll try to write a quick howto.

Say you have two x86\_64 hosts, one AMD and the other, Intel. Their hostnames are:

foo-amd.bazcorp.com foo-intel.bazcorp.com

I would create 2 labels, amd64 and intel64, I would also create a label to indicate the machines can be provisioned by cobbler. This is because you can tell autotest to run a job in any machine that matches a given label.

Logged as the autotest user:

```
$ /usr/local/autotest/cli/autotest-rpc-client label create -t amd64
Created label:
  'amd64'
$ /usr/local/autotest/cli/autotest-rpc-client label create -t intel64
Created label:
  'intel64'
$ /usr/local/autotest/cli/autotest-rpc-client label create hostprovisioning
Created label:
  'hostprovisioning'
```

Then I'd create each machine with the appropriate labels

```
$ /usr/local/autotest/cli/autotest-rpc-client host create -t amd64 -b_
↳hostprovisioning foo-amd.bazcorp.com
Added host:
    foo-amd.bazcorp.com

$ /usr/local/autotest/cli/autotest-rpc-client host create -t intel64 -b_
↳hostprovisioning foo-intel.bazcorp.com
Added host:
    foo-intel.bazcorp.com
```

### 6.10.5 Step 3 - Prepare the test jobs

Now you have to copy the plugin we have developed to extend the CLI to parse additional information for the virt jobs:

```
$ cp /usr/local/autotest/contrib/virt/site_job.py /usr/local/autotest/cli/
```

This should be enough to enable all the extra functionality.

You also need to copy the `site-config.cfg` file that we published as a reference, to the qemu config module:

```
$ cp /usr/local/autotest/contrib/virt/site-config.cfg /usr/local/autotest/client/
↳tests/virt/qemu/cfg
```

Be aware that you *need* to read this file well, and later, configure it to your testing needs. We specially stress that you might want to create private git mirrors of the git repos you want to test, so you tax the upstream mirrors less, and have increased reliability.

Right now it is able to run regression testing on Fedora 18, and upstream kvm, provided that you have a cobbler instance functional, with a profile called `f18-autotest-kvm` that can be properly installed on your machines. Having that properly set up may open another can of worms.

One simple way to schedule the jobs, that we does use at our server, is to use cron to schedule daily testing jobs of the things you want to test. Here is an example that should work 'out of the box'. Provided that you have an internal mailing list that you created with the purpose of receiving email notifications, called `autotest-virt-jobs@foocorp.com`, you can stick that on the crontab of the user `autotest` in the Server:

```
07 00 * * 1-7 /usr/local/autotest/cli/autotest-rpc-client job create -B never -a_
↳never -s -e autotest-virt-jobs@foocorp.com -f "/usr/local/autotest/contrib/virt/
↳control.template" -T --timestamp -m '1*hostprovisioning' -x 'only qemu-git..sanity'
↳"Upstream qemu.git sanity"
15 00 * * 1-7 /usr/local/autotest/cli/autotest-rpc-client job create -B never -a_
↳never -s -e autotest-virt-jobs@foocorp.com -f "/usr/local/autotest/contrib/virt/
↳control.template" -T --timestamp -m '1*hostprovisioning' -x 'only f18..sanity'
↳"Fedora 18 koji sanity"
07 01 * * 1-7 /usr/local/autotest/cli/autotest-rpc-client job create -B never -a_
↳never -s -e autotest-virt-jobs@foocorp.com -f "/usr/local/autotest/contrib/virt/
↳control.template" -T --timestamp -m '1*hostprovisioning' -x 'only qemu-git..stable'
↳"Upstream qemu.git stable"
15 01 * * 1-7 /usr/local/autotest/cli/autotest-rpc-client job create -B never -a_
↳never -s -e autotest-virt-jobs@foocorp.com -f "/usr/local/autotest/contrib/virt/
↳control.template" -T --timestamp -m '1*hostprovisioning' -x 'only f18..stable'
↳"Fedora 18 koji stable"
```

That should be enough to have one sanity and stable job for:

- Fedora 18.

- qemu.git userspace and kvm.git kernel.

What does these ‘stable’ and ‘sanity’ jobs do? In short:

- Host OS (Fedora 18) installation through cobbler
- Latest kernel for the Host OS installation (either the last kernel update build for fedora, or check out, compile and install kvm.git).

### 6.10.6 sanity job

- Install latest Fedora 18 qemu-kvm, or compiles the latest qemu.git
- Installs a VM with Fedora 18, boots, reboots, does simple, single host migration with all supported protocols
- Takes about two hours. In fact, internally we test more guests, but they are not widely available (RHEL 6 and Windows 7), so we just replaced them with Fedora 18.

### 6.10.7 stable job

- Same as above, but many more networking, timedrift and other tests

### 6.10.8 Setup cobbler to install hosts

Cobbler is an installation server, that control DHCP and/or PXE boot for your x86\_64 bare metal virtualization hosts. You can learn how to set it up in the following resource:

<https://github.com/cobbler/cobbler/wiki>

You will set it up for simple installations, and you probably just need to import a Fedora 18 DVD into it, so it can be used to install your hosts. Following the import procedure, you’ll have a ‘profile’ created, which is a label that describes an OS that can be installed on your virtualization host. The label we chose, as already mentioned is f18-autotest-kvm. If you want to change that name, you’ll have to change site-config.cfg accordingly.

Also, you will have to add your test machines to your cobbler server, and will have to set up remote control (power on/off) for them.

The following is important:

*The hostname of your machine in the autotest server has to be the name of your system in cobbler.*

So, for the hypothetical example you’ll have to have set up systems with names foo-amd.bazcorp.com foo-intel.bazcorp.com in cobbler. That’s right, the ‘name’ of the system has to be the ‘hostname’. Otherwise, autotest will ask cobbler and cobbler will not know which machine autotest is taking about.

Other assumptions we have here:

1) We have a (read only, to avoid people deleting isos by mistake) NFS share that has the Fedora 18 DVD and other ISOS. The structure for the base dir could look something like:

```
.
|-- linux
|   |-- Fedora-18-x86_64-DVD.iso
|-- windows
|   |-- en_windows_7_ultimate_x64_dvd_x15-65922.iso
|   |-- virtio-win.iso
|   |-- winutils.iso
```

This is just in case you are legally entitled to download and use Windows 7, for example.

2) We have another NFS share with space for backups of qcow2 images that got corrupted during testing, and you want people to analyze them. The structure would be:

```
.
|-- foo-amd
`-- bar-amd
```

That is, one directory for each host machine you have on your grid. Make sure they end up being properly configured in the kickstart.

Now here is one excerpt of kickstart with some of the gotchas we learned with experience. Some notes:

- This is not a fully formed, functional kickstart, just in case you didn't notice.
- This is provided in the hopes you read it, understand it and adapt things to your needs. If you paste this into your kickstart and tell me it doesn't work, I WILL silently ignore your email, and if you insist, your emails will be filtered out and go to the trash can.

```
install

text
reboot
lang en_US
keyboard us
rootpw --iscrypted [your-password]
firewall --disabled
selinux --disabled
timezone --utc America/New_York
firstboot --disable
services --enabled network --disabled NetworkManager
bootloader --location=mbr
ignoredisk --only-use=sda
zerombr
clearpart --all --drives=sda --initlabel
autopart
network --bootproto=dhcp --device=eth0 --onboot=on

%packages
@core
@development-libs
@development-tools
@virtualization
wget
dnsmasq
genisoimage
python-imaging
qemu-kvm-tools
gdb
iasl
libvirt
python-devel
ntpdate
gstreamer-plugins-good
gstreamer-python
dmidecode
popt-devel
libblkid-devel
```

(continues on next page)

(continued from previous page)

```

pixman-devel
mtools
koji
tcpdump
bridge-utils
dosfstools
%end

%post

echo "[nfs-server-that-holds-iso-images]:[nfs-server-that-holds-iso-images]/base_path/
↪iso /var/lib/virt_test/isos nfs ro,defaults 0 0" >> /etc/fstab
echo "[nfs-server-that-holds-iso-images]:[nfs-server-that-holds-iso-images]/base_path/
↪steps_data /var/lib/virt_test/steps_data nfs rw,nosuid,nodev,noatime,intr,hard,tcp,
↪0 0" >> /etc/fstab
echo "[nfs-server-that-has-lots-of-space-for-backups]:/base_path/[dir-that-holds-this-
↪hostname-backups] /var/lib/virt_test/images_archive nfs rw,nosuid,nodev,noatime,
↪intr,hard,tcp 0 0" >> /etc/fstab
mkdir -p /var/lib/virt_test/isos
mkdir -p /var/lib/virt_test/steps_data
mkdir -p /var/lib/virt_test/images
mkdir -p /var/lib/virt_test/images_archive

mkdir --mode=700 /root/.ssh
echo 'ssh-dss [the-ssh-key-of-the-Server-autotest-user]' >> /root/.ssh/authorized_keys
chmod 600 /root/.ssh/authorized_keys

ntpdate [your-ntp-server]
hwclock --systohc

systemctl mask tmp.mount
%end

```

### 6.10.9 Painful trial and error process to adjust details

After all that, you can start running your test jobs and see what things will need to be fixed. You can run your jobs easily by logging into your Server, with the autotest user, and use the command:

```

$ /usr/local/autotest/cli/autotest-rpc-client job create -B never -a never -s -e_
↪autotest-virt-jobs@foocorp.com -f "/usr/local/autotest/contrib/virt/control.template
↪" -T --timestamp -m 'l*hostprovisioning' -x 'only f18..sanity' "Fedora 18 koji_
↪sanity"

```

As you might have guessed, this will schedule a Fedora 18 sanity job. So go through it and fix things step by step. If anything, you can take a look at this:

<https://github.com/autotest/autotest/wiki/DiagnosingFailures>

And see if it helps. You can also ask on the mailing list, but *please, pretty please* do your homework before you ask us to guide you through all the process step by step. This is already a step by step procedure.

All right, good luck, and happy testing!

## 6.11 Installing Windows virtio drivers with Avocado-VT

So, you want to use Avocado-VT to install windows guests. You also want them to be installed with the paravirtualized drivers developed for windows. You have come to the right place.

### 6.11.1 A bit of context on windows virtio drivers install

This method of install so far covers the storage (viosstor) and network (NetKVM) drivers. Avocado-VT uses a boot floppy with a Windows answer file in order to perform unattended install of windows guests. For winXP and win2003, the unattended files are simple .ini files, while for win2008 and later, the unattended files are XML files.

In order to install the virtio drivers during guest install, KVM autotest has to inform the windows install programs `*where*` to find the drivers. So, we work from the following assumptions:

1. You already have an iso file that contains windows virtio drivers (inf files) for both netkvm and viostor. If you are unsure how to generate that iso, there's an example script under contrib, inside the kvm test directory. Here is an example of how the files inside this cd would be organized, assuming the iso image is mounted under `/tmp/virtio-win` (the actual cd has more files, but we took only the parts that concern to the example, win7 64 bits).

```

/tmp/virtio-win/
/tmp/virtio-win/vista
/tmp/virtio-win/vista/amd64
/tmp/virtio-win/vista/amd64/netkvm.cat
/tmp/virtio-win/vista/amd64/netkvm.inf
/tmp/virtio-win/vista/amd64/netkvm.pdb
/tmp/virtio-win/vista/amd64/netkvm.sys
/tmp/virtio-win/vista/amd64/netkvmco.dll
/tmp/virtio-win/vista/amd64/readme.doc
/tmp/virtio-win/win7
/tmp/virtio-win/win7/amd64
/tmp/virtio-win/win7/amd64/balloon.cat
/tmp/virtio-win/win7/amd64/balloon.inf
/tmp/virtio-win/win7/amd64/balloon.pdb
/tmp/virtio-win/win7/amd64/balloon.sys
/tmp/virtio-win/win7/amd64/blnsvr.exe
/tmp/virtio-win/win7/amd64/blnsvr.pdb
/tmp/virtio-win/win7/amd64/vioser.cat
/tmp/virtio-win/win7/amd64/vioser.inf
/tmp/virtio-win/win7/amd64/vioser.pdb
/tmp/virtio-win/win7/amd64/vioser.sys
/tmp/virtio-win/win7/amd64/vioser-test.exe
/tmp/virtio-win/win7/amd64/vioser-test.pdb
/tmp/virtio-win/win7/amd64/viostor.cat
/tmp/virtio-win/win7/amd64/viostor.inf
/tmp/virtio-win/win7/amd64/viostor.pdb
/tmp/virtio-win/win7/amd64/viostor.sys
/tmp/virtio-win/win7/amd64/wdfcoinstaller01009.dll
...

```

If you are planning on installing WinXP or Win2003, you should also have a pre-made floppy disk image with the virtio drivers `*and*` a configuration file that the installer program will read to fetch the right drivers from it. Unfortunately, I don't have much info on how to build that file, you probably would have the image already assembled if you are willing to test those guest OS.

So you have to map the paths of your cd containing the drivers on the config variables. We hope to improve this in cooperation with the virtio drivers team.

## 6.11.2 Step by step procedure

We are assuming you already have the virtio cd properly assembled with you, as well as windows iso files that \*do match the ones provided in our test\_base.cfg.sample\*. Don't worry though, we try as much as possible to use files from MSDN, to standardize.

We will use win7 64 bits (non sp1) as the example, so the CD you'd need is:

```
cdrom_cd1 = isos/windows/en_windows_7_ultimate_x86_dvd_x15-65921.iso
shasum_cd1 = 5395dc4b38f7bdb1e005ff414deedfdb16dbf610
```

This file can be downloaded from the MSDN site, so you can verify the SHA1 sum of it matches.

1. Git clone autotest to a convenient location, say \$HOME/Code/autotest. See [the download source documentation](#). Please do use git and clone the repo to the location mentioned.
2. Execute the `get_started.py` script (see the [get started documentation](#) <./GetStartedGuide>. It will create the directories where we expect the cd files to be available. You don't need to download the Fedora 14 DVD, but you do need to download the `winutils.iso`. Our configuration is based on RHEL/Fedora based version that can be obtained from [here](https://docs.fedoraproject.org/en-US/quick-docs/creating-windows-virtual-machines-using-virtio-drivers/index.html) <<https://docs.fedoraproject.org/en-US/quick-docs/creating-windows-virtual-machines-using-virtio-drivers/index.html>> and need to be placed in `/tmp/kvm_autotest_root/isos/windows`). Please, do read the documentation mentioned on the script to avoid missing packages installed and other mis-configuration.
3. Create a windows dir under `/tmp/kvm_autotest_root/isos`
4. Copy your windows 7 iso to `/tmp/kvm_autotest_root/isos/windows`
5. Edit the file `cdkeys.cfg` and put the windows 7 64 bit key on that file
6. Edit the file `win-virtio.cfg` and verify if the paths are correct. You can see that by looking this session:

```
64:
    unattended_install.cdrom, whql.support_vm_install:
        # Look at your cd structure and see where the drivers are
        # actually located (viostor and netkvm)
        virtio_storage_path = 'F:\win7\amd64'
        virtio_network_path = 'F:\vista\amd64'

        # Uncomment if you have a nw driver installer on the iso
        #virtio_network_installer_path = 'F:\RHEV-Network64.msi'
```

7. If you are using the cd with the layout mentioned on the beginning of this article, the paths are already correct. However, if they're different (more likely), you have to adjust paths. Don't forget to read and do all the config on `win-virtio.cfg` file as instructed by the comments.
8. On `tests.cfg`, you have to enable virtio install of windows 7. On the block below, you have to change only `rtl8139` to only `virtio_net` and only `ide` to only `virtio-blk`. You are informing autotest that you only want a vm with virtio hard disk and network device installed.

```
# Runs qemu-kvm, Windows Vista 64 bit guest OS, install, boot, shutdown
- @qemu_kvm_windows_quick:
    # We want qemu-kvm for this run
    qemu_binary = /usr/bin/qemu-kvm
    qemu_img_binary = /usr/bin/qemu-img
    # Only qcow2 file format
    only qcow2
    # Only rtl8139 for nw card (default on qemu-kvm)
    only rtl8139
```

(continues on next page)

(continued from previous page)

```
# Only ide hard drives
only ide
# qemu-kvm will start only with -smp 2 (2 processors)
only smp2
# No PCI assignable devices
only no_pci_assignable
# No large memory pages
only smallpages
# Operating system choice
only Win7.64
# Subtest choice. You can modify that line to add more subtests
only unattended_install.cdrom, boot, shutdown
```

9. You have to change the bottom of `tests.cfg` to look like the below, Which means you are informing autotest to only run the test set mentioned above, rather than the default, that installs Fedora 15.

```
only qemu_kvm_windows_quick
```

10. As informed on the output of `get_started.py`, the command you can execute to run autotest is (please run this AS ROOT or sudo)

```
$ $HOME/Code/autotest/client/bin/autotest $HOME/Code/autotest/client/tests/kvm/
↵control
```

11. Profit! You automated install of Windows 7 with the virtio drivers will be carried out.

If you want to install other guests, as you might imagine, you can change `only Win7.64` with other guests, say `only Win2008.64.sp2`. Now, during the first time you perform your installs, it's good to watch the installation to see if there aren't problems such as a **wrong cd key** preventing your install from happening. Avocado-VT prints the `qemu` command line used, so you can see which `vnc` display you can connect to to watch your `vm` being installed.

## 6.12 Running QEMU kvm-unit-tests

Currently there are two ways to run `kvm-unit-tests`. Newer one with per test results method is *Run `kvm-unit-tests` in `avocado`* and the older one *Run `kvm-unit-tests` in `avocado-vt`* which requires manual modifications and only reports overall results.

### 6.12.1 Run `kvm-unit-tests` in `avocado`

There is a `contrib` script to run `kvm-unit-test` using *external-runner* Avocado feature. It optionally downloads the latest `kvm-unit-test` from Git, compiles it and runs the tests inside `avocado`.

The `contrib` script is located in `$AVOCADO/contrib/testsuites/run-kvm-unit-test.sh` or can be downloaded from: <https://raw.githubusercontent.com/avocado-framework/avocado/master/contrib/testsuites/run-kvm-unit-test.sh>

Then you simply run it and wait for results:

```
$ ./contrib/testsuites/run-kvm-unit-test.sh
JOB ID      : ca00d570f03b4942368ec9c407d69a881d98eb9d
JOB LOG     : /home/medic/avocado/job-results/job-2016-07-04T09.38-ca00d57/job.log
TESTS      : 38
(01/38) access: PASS (4.77 s)
```

(continues on next page)

(continued from previous page)

```

(02/38) apic: PASS (5.10 s)
(03/38) debug: PASS (1.82 s)
(04/38) emulator: ^C
Interrupt requested. Waiting 2 seconds for test to finish (ignoring new Ctrl+C until
↪then)

INTERRUPTED (0.84 s)
RESULTS      : PASS 3 | ERROR 0 | FAIL 0 | SKIP 34 | WARN 0 | INTERRUPT 1
JOB HTML     : /home/medic/avocado/job-results/job-2016-07-04T09.38-ca00d57/html/
↪results.html
TESTS TIME  : 12.54 s

```

**Note:** You can specify various options including the avocado arguments. Use the `-h` to see them all (eg. wildcard to specify tests pattern or path to avoid (re)downloading of the kvm-unit-test)

## 6.12.2 Run kvm-unit-tests in avocado-vt

For a while now, qemu-kvm does contain a unittest suite that can be used to assess the behavior of some KVM subsystems. Ideally, they are supposed to PASS, provided you are running both the latest qemu and the latest linux KVM tree. Avocado-VT for quite a long time has support for running them in an automated way. It's a good opportunity to put your git branch to unittest, starting from a clean state (KVM autotest will fetch from your git tree, leaving your actual development tree intact and doing things from scratch, and that is less likely to mask problems).

### A bit of context on Avocado-VT build tests

People usually don't know that Avocado-VT has support to build and install QEMU/KVM for testing purposes, from many different software sources. You can:

1. Build qemu-kvm from a git repo (most common choice for developers hacking on code)
2. Install qemu-kvm from an rpm file (people testing a newly built rpm package)
3. Install qemu-kvm straight from the Red Hat build systems (Koji is the instance of the build system for Fedora, Brew is the same, but for RHEL. With this we can perform quality control on both Fedora and RHEL packages, trying to anticipate breakages before the packages hit users)

For this article, we are going to focus on git based builds. Also, we are focusing on Fedora and RHEL. We'll try to write the article in a pretty generic fashion, you are welcome to improve this with details on how to do the same on your favorite linux distribution.

### Before you start

You need to verify that you can actually build qemu-kvm from source, as well as the unittest suite.

1. Make sure you have the appropriate packages installed. You can read *the install prerequisite packages (client) section* for more information.

### Step by step procedure

1. Git clone autotest to a convenient location, say `$HOME/Code/autotest`. See *the download source documentation* Please do use git and clone the repo to the location mentioned.

- Execute the `get_started.py` script (see [the get started documentation](#)). If you just want to run unittests, you can safely skip each and every iso download possible, as *qemu-kvm will straight boot small kernel images (the unittests)* rather than full blown OS installs.
- As running unittests is something that's fairly independent of other Avocado-VT testing you can do, and it's something people are interested in, we prepared a *special control file* and a *special configuration file* for it. On the `kvm` directory, you can see the files `unittests.cfg` `control.unittests`. You only need to edit `unittests.cfg`.
- The file `unittests.cfg` is a stand alone configuration for running unittests. It is comprised by a build variant and a unittests variant. Edit the file, it'll look like:

```
... bunch of params needed for the Avocado-VT preprocessor
# Tests
variants:
  - build:
      type = build
      vms = ''
      start_vm = no
      # Load modules built/installed by the build test?
      load_modules = no
      # Save the results of this build on test.resultsdir?
      save_results = no
      variants:
        - git:
            mode = git
            user_git_repo = git://git.kernel.org/pub/scm/virt/kvm/qemu-kvm.git
            user_branch = next
            user_lbranch = next
            test_git_repo = git://git.kernel.org/pub/scm/virt/kvm/kvm-unit-
↳tests.git

  - unittest:
      type = unittest
      vms = ''
      start_vm = no
      unittest_timeout = 600
      testdev = yes
      extra_params += " -S"
      # In case you want to execute only a subset of the tests defined on the
      # unittests.cfg file on qemu-kvm, uncomment and edit test_list
      #test_list = idt_test hypercall vmexit realmode

only build.git unittest
```

- As you can see above, you have places to specify both the userspace git repo and the unittest git repo. You are then free to replace `user_git_repo` with your own git repo. It can be a remote git location, or it can simply be the path to a cloned tree inside your development machine.
- As of Fedora 15, that ships with gcc 4.6.0, the compilation is more strict, so things such as an unused variable in the code `*will*` lead to a build failure. You can disable that level of strictness by providing *extra configure script options* to your `qemu-kvm` userspace build. Right below the `user_git_repo` line, you can set the variable `extra_configure_options` to include `--disable-werror`. Let's say you also want Avocado-VT to fetch from my local tree, `/home/lmr/Code/qemu-kvm`, master branch, same for the `kvm-unit-tests` repo. If you make those changes, your build variant will look like:

```
- git:
    mode = git
```

(continues on next page)

(continued from previous page)

```

user_git_repo = /home/lmr/Code/qemu-kvm
extra_configure_options = --disable-werror
user_branch = master
user_lbranch = master
test_git_repo = /home/lmr/Code/kvm-unit-tests

```

7. Now you can just run Avocado-VT as usual, you just have to change the main control file (called `control` with the `unittest` one `control.unittests`)

```

$ $HOME/Code/autotest/client/bin/autotest $HOME/Code/autotest/client/tests/kvm/
↳control.unittests

```

8. The output of a typical `unittest` execution looks like. Notice that `autotest` informs you where the logs of each individual `unittests` are located, so you can check that out as well.

```

07/14 18:49:44 INFO | unittest:0052| Running apic
07/14 18:49:44 INFO |   kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vml' -nodefaults -vga std -monitor unix:
↳'/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳autotest/tests/kvm/unittests/apic.flat' -vnc :0 -chardev file,id=testlog,path=/
↳tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S -cpu
↳qemu64,+x2apic
07/14 18:49:46 INFO | unittest:0096| Waiting for unittest apic to complete,
↳timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 18:59:46 ERROR| unittest:0108| Exception happened during apic: Timeout
↳elapsed (600s)
07/14 18:59:46 INFO | unittest:0113| Unit test log collected and available under
↳/usr/local/autotest/results/default/kvm.qemu-kvm-git.unittests/debug/apic.log
07/14 18:59:46 INFO | unittest:0052| Running smptest
07/14 19:00:15 INFO |   aexpect:0783| (qemu) (Process terminated with status 0)
07/14 19:00:16 INFO |   kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vml' -nodefaults -vga std -monitor unix:
↳'/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳autotest/tests/kvm/unittests/smptest.flat' -vnc :0 -chardev file,id=testlog,
↳path=/tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S
07/14 19:00:17 INFO | unittest:0096| Waiting for unittest smptest to complete,
↳timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 19:00:17 INFO |   aexpect:0783| (qemu) (Process terminated with status 0)
07/14 19:00:18 INFO | unittest:0113| Unit test log collected and available under
↳/usr/local/autotest/results/default/kvm.qemu-kvm-git.unittests/debug/smptest.log
07/14 19:00:18 INFO | unittest:0052| Running smptest3
07/14 19:00:18 INFO |   kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vml' -nodefaults -vga std -monitor unix:
↳'/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳serial-20110714-184944-6ms0',server,nowait -m 512 -smp 3 -kernel '/usr/local/
↳autotest/tests/kvm/unittests/smptest.flat' -vnc :0 -chardev file,id=testlog,
↳path=/tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S
07/14 19:00:19 INFO | unittest:0096| Waiting for unittest smptest3 to complete,
↳timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 19:00:19 INFO |   aexpect:0783| (qemu) (Process terminated with status 0)
07/14 19:00:20 INFO | unittest:0113| Unit test log collected and available under
↳/usr/local/autotest/results/default/kvm.qemu-kvm-git.unittests/debug/smptest3.
↳log

```

(continues on next page)

(continued from previous page)

```

07/14 19:00:20 INFO |   unittest:0052| Running vmexit
07/14 19:00:20 INFO |   kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vml' -nodefaults -vga std -monitor unix:
↳'/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳autotest/tests/kvm/unittests/vmexit.flat' -vnc :0 -chardev file,id=testlog,
↳path=/tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S
07/14 19:00:21 INFO |   unittest:0096| Waiting for unittest vmexit to complete,
↳timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 19:00:31 INFO |   aexpect:0783| (qemu) (Process terminated with status 0)
07/14 19:00:31 INFO |   unittest:0113| Unit test log collected and available under
↳/usr/local/autotest/results/default/kvm.qemu-kvm-git.unittests/debug/vmexit.log
07/14 19:00:31 INFO |   unittest:0052| Running access
07/14 19:00:31 INFO |   kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vml' -nodefaults -vga std -monitor unix:
↳'/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳autotest/tests/kvm/unittests/access.flat' -vnc :0 -chardev file,id=testlog,
↳path=/tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S
07/14 19:00:32 INFO |   unittest:0096| Waiting for unittest access to complete,
↳timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 19:01:02 INFO |   aexpect:0783| (qemu) (Process terminated with status 0)
07/14 19:01:03 INFO |   unittest:0113| Unit test log collected and available under
↳/usr/local/autotest/results/default/kvm.qemu-kvm-git.unittests/debug/access.log
07/14 19:01:03 INFO |   unittest:0052| Running emulator
07/14 19:01:03 INFO |   kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vml' -nodefaults -vga std -monitor unix:
↳'/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳autotest/tests/kvm/unittests/emulator.flat' -vnc :0 -chardev file,id=testlog,
↳path=/tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S
07/14 19:01:05 INFO |   unittest:0096| Waiting for unittest emulator to complete,
↳timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 19:01:06 INFO |   aexpect:0783| (qemu) (Process terminated with status 0)
07/14 19:01:07 INFO |   unittest:0113| Unit test log collected and available under
↳/usr/local/autotest/results/default/kvm.qemu-kvm-git.unittests/debug/emulator.
↳log
07/14 19:01:07 INFO |   unittest:0052| Running hypercall
07/14 19:01:07 INFO |   kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vml' -nodefaults -vga std -monitor unix:
↳'/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳autotest/tests/kvm/unittests/hypercall.flat' -vnc :0 -chardev file,id=testlog,
↳path=/tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S
07/14 19:01:08 INFO |   unittest:0096| Waiting for unittest hypercall to complete,
↳timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 19:01:08 INFO |   aexpect:0783| (qemu) (Process terminated with status 0)
07/14 19:01:09 INFO |   unittest:0113| Unit test log collected and available under
↳/usr/local/autotest/results/default/kvm.qemu-kvm-git.unittests/debug/hypercall.
↳log
07/14 19:01:09 INFO |   unittest:0052| Running idt_test
07/14 19:01:09 INFO |   kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vml' -nodefaults -vga std -monitor unix:
↳'/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳autotest/tests/kvm/unittests/idt_test.flat' -vnc :0 -chardev file,id=testlog,
↳path=/tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S

```

(continues on next page)

(continued from previous page)

```

07/14 19:01:10 INFO | unittest:0096| Waiting for unittest idt_test to complete,
↳timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 19:01:10 INFO | aexpect:0783| (qemu) (Process terminated with status 0)
07/14 19:01:11 INFO | unittest:0113| Unit test log collected and available under
↳/usr/local/autotest/results/default/kvm.qemu-kvm-git.unittests/debug/idt_test.
↳log
07/14 19:01:11 INFO | unittest:0052| Running msr
07/14 19:01:11 INFO | kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vm1' -nodefaults -vga std -monitor unix:
↳'/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳autotest/tests/kvm/unittests/msr.flat' -vnc :0 -chardev file,id=testlog,path=/
↳tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S
07/14 19:01:12 INFO | unittest:0096| Waiting for unittest msr to complete,
↳timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 19:01:13 INFO | aexpect:0783| (qemu) (Process terminated with status 0)
07/14 19:01:13 INFO | unittest:0113| Unit test log collected and available under
↳/usr/local/autotest/results/default/kvm.qemu-kvm-git.unittests/debug/msr.log
07/14 19:01:13 INFO | unittest:0052| Running port80
07/14 19:01:13 INFO | kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vm1' -nodefaults -vga std -monitor unix:
↳'/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳autotest/tests/kvm/unittests/port80.flat' -vnc :0 -chardev file,id=testlog,
↳path=/tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S
07/14 19:01:14 INFO | unittest:0096| Waiting for unittest port80 to complete,
↳timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 19:01:31 INFO | aexpect:0783| (qemu) (Process terminated with status 0)
07/14 19:01:32 INFO | unittest:0113| Unit test log collected and available under
↳/usr/local/autotest/results/default/kvm.qemu-kvm-git.unittests/debug/port80.log
07/14 19:01:32 INFO | unittest:0052| Running realmode
07/14 19:01:32 INFO | kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vm1' -nodefaults -vga std -monitor unix:
↳'/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳autotest/tests/kvm/unittests/realmode.flat' -vnc :0 -chardev file,id=testlog,
↳path=/tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S
07/14 19:01:33 INFO | unittest:0096| Waiting for unittest realmode to complete,
↳timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 19:01:33 INFO | aexpect:0783| (qemu) (Process terminated with status 0)
07/14 19:01:34 INFO | unittest:0113| Unit test log collected and available under
↳/usr/local/autotest/results/default/kvm.qemu-kvm-git.unittests/debug/realmode.
↳log
07/14 19:01:34 INFO | unittest:0052| Running sieve
07/14 19:01:34 INFO | kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vm1' -nodefaults -vga std -monitor unix:
↳'/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳autotest/tests/kvm/unittests/sieve.flat' -vnc :0 -chardev file,id=testlog,path=/
↳tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S
07/14 19:01:35 INFO | unittest:0096| Waiting for unittest sieve to complete,
↳timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 19:02:05 INFO | aexpect:0783| (qemu) (Process terminated with status 0)

```

(continues on next page)

(continued from previous page)

```

07/14 19:02:05 INFO | unittest:0113| Unit test log collected and available under
↳ /usr/local/autotest/results/default/kvm.qemu-kvm-git.unittests/debug/sieve.log
07/14 19:02:05 INFO | unittest:0052| Running tsc
07/14 19:02:05 INFO |   kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vml' -nodefaults -vga std -monitor unix:
↳ '/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳ monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳ serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳ autotest/tests/kvm/unittests/tsc.flat' -vnc :0 -chardev file,id=testlog,path=/
↳ tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S
07/14 19:02:06 INFO | unittest:0096| Waiting for unittest tsc to complete,
↳ timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 19:02:06 INFO |   aexpect:0783| (qemu) (Process terminated with status 0)
07/14 19:02:07 INFO | unittest:0113| Unit test log collected and available under
↳ /usr/local/autotest/results/default/kvm.qemu-kvm-git.unittests/debug/tsc.log
07/14 19:02:07 INFO | unittest:0052| Running xsave
07/14 19:02:07 INFO |   kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vml' -nodefaults -vga std -monitor unix:
↳ '/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳ monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳ serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳ autotest/tests/kvm/unittests/xsave.flat' -vnc :0 -chardev file,id=testlog,path=/
↳ tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S
07/14 19:02:08 INFO | unittest:0096| Waiting for unittest xsave to complete,
↳ timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 19:02:09 INFO |   aexpect:0783| (qemu) (Process terminated with status 0)
07/14 19:02:09 INFO | unittest:0113| Unit test log collected and available under
↳ /usr/local/autotest/results/default/kvm.qemu-kvm-git.unittests/debug/xsave.log
07/14 19:02:09 INFO | unittest:0052| Running rmap_chain
07/14 19:02:09 INFO |   kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vml' -nodefaults -vga std -monitor unix:
↳ '/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳ monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳ serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳ autotest/tests/kvm/unittests/rmap_chain.flat' -vnc :0 -chardev file,id=testlog,
↳ path=/tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S
07/14 19:02:11 INFO | unittest:0096| Waiting for unittest rmap_chain to complete,
↳ timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 19:02:12 INFO |   aexpect:0783| (qemu) (Process terminated with status 0)
07/14 19:02:13 INFO | unittest:0113| Unit test log collected and available under
↳ /usr/local/autotest/results/default/kvm.qemu-kvm-git.unittests/debug/rmap_chain.
↳ log
07/14 19:02:13 INFO | unittest:0052| Running svm
07/14 19:02:13 INFO |   kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vml' -nodefaults -vga std -monitor unix:
↳ '/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳ monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳ serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳ autotest/tests/kvm/unittests/svm.flat' -vnc :0 -chardev file,id=testlog,path=/
↳ tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S -enable-
↳ nesting -cpu qemu64,+svm
07/14 19:02:13 INFO |   aexpect:0783| (qemu) qemu: -enable-nesting: invalid option
07/14 19:02:13 INFO |   aexpect:0783| (qemu) (Process terminated with status 1)
07/14 19:02:13 ERROR| unittest:0108| Exception happened during svm: VM creation
↳ command failed: "/usr/local/autotest/tests/kvm/qemu -name 'vml' -nodefaults -
↳ vga std -monitor unix:'/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,
↳ nowait -qmp unix:'/tmp/monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -
↳ serial unix:'/tmp/serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel
↳ '/usr/local/autotest/tests/kvm/unittests/svm.flat' -vnc :0 -chardev file,
↳ id=testlog,path=/tmp/testlog-20110714-184944-6ms0 -device testdev,
↳ chardev=testlog -S -enable-nesting -cpu qemu64,+svm' (status: 1, output:
↳ 'qemu: -enable-nesting: invalid option\n')

```

(continues on next page)

(continued from previous page)

```

07/14 19:02:13 ERROR|  unitttest:0115| Not possible to collect logs
07/14 19:02:13 INFO |  unitttest:0052| Running svm-disabled
07/14 19:02:13 INFO |    kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vm1' -nodefaults -vga std -monitor unix:
↳'/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳autotest/tests/kvm/unitttests/svm.flat' -vnc :0 -chardev file,id=testlog,path=/
↳tmp/testlog-20110714-184944-6ms0 -device testdev,chardev=testlog -S -cpu_
↳qemu64,-svm
07/14 19:02:14 INFO |  unitttest:0096| Waiting for unitttest svm-disabled to_
↳complete, timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 19:02:15 INFO |    aexpect:0783| (qemu) (Process terminated with status 0)
07/14 19:02:16 INFO |  unitttest:0113| Unit test log collected and available under_
↳/usr/local/autotest/results/default/kvm.qemu-kvm-git.unitttests/debug/svm-
↳disabled.log
07/14 19:02:16 INFO |  unitttest:0052| Running kvmclock_test
07/14 19:02:16 INFO |    kvm_vm:0782| Running qemu command:
/usr/local/autotest/tests/kvm/qemu -name 'vm1' -nodefaults -vga std -monitor unix:
↳'/tmp/monitor-humanmonitor1-20110714-184944-6ms0',server,nowait -qmp unix:'/tmp/
↳monitor-qmpmonitor1-20110714-184944-6ms0',server,nowait -serial unix:'/tmp/
↳serial-20110714-184944-6ms0',server,nowait -m 512 -smp 2 -kernel '/usr/local/
↳autotest/tests/kvm/unitttests/kvmclock_test.flat' -vnc :0 -chardev file,
↳id=testlog,path=/tmp/testlog-20110714-184944-6ms0 -device testdev,
↳chardev=testlog -S --append "10000000 `date +%s`"
07/14 19:02:17 INFO |  unitttest:0096| Waiting for unitttest kvmclock_test to_
↳complete, timeout 600, output in /tmp/testlog-20110714-184944-6ms0
07/14 19:02:33 INFO |    aexpect:0783| (qemu) (Process terminated with status 0)
07/14 19:02:34 INFO |  unitttest:0113| Unit test log collected and available under_
↳/usr/local/autotest/results/default/kvm.qemu-kvm-git.unitttests/debug/kvmclock_
↳test.log
07/14 19:02:34 ERROR|    kvm:0094| Test failed: TestFail: Unit tests failed:_
↳apic svm

```

You might take a look at the `unitttests.cfg` config file options to do some tweaking you might like, such as making the timeout to consider a unitttest as failed smaller and other things.

## 6.13 Parallel Jobs

Avocado-VT ships with a plugin that creates a lock file in a known public location (`/tmp` by default, but configurable) to prevent multiple runs of jobs that include VT tests.

The reason is that, by default, multiple jobs running at the same can access the same data files and cause corruption. Example of data files are the guest images, which are usually modified, either directly or indirectly by the tests.

### 6.13.1 Checking Installation

The `vt-joblock` is installed and registered by default. To make sure it's active, run:

```
$ avocado plugins
```

The VT Job lock plugin should be listed:

```
Plugins that run before/after the execution of jobs (avocado.plugins.job.prepost):  
...  
vt-joblock Avocado-VT Job Lock/Unlock  
...
```

### 6.13.2 Configuration

The configuration for the vt-joblock plugin can be found at `/etc/avocado/conf.d/vt_joblock.conf`. Example of a configuration file content follows:

```
[plugins.vtjoblock]  
# Directory where the lock file will be located. Avocado should have permission  
# to write to this directory.  
dir=/tmp
```

The configuration key `dir` lets you set the directory where Avocado will look for an existing lock file before running, and create one if it doesn't exist yet.

### 6.13.3 Running Parallel Jobs

Supposing that you have multiple users on a single machine, using different data directories, you can allow parallel VT jobs by setting different lock directories for each user.

To do so, you can add the customized lock directory to the user's own Avocado configuration file. Start by creating a lock directory:

```
[user1@localhost] $ mkdir ~/avocado/data/avocado-vt/lockdir
```

Then modify the user's own configuration to point to the newly created lock directory:

```
[user1@localhost] $ cat >> ~/.config/avocado/avocado.conf <<EOF  
[plugins.vtjoblock]  
dir=/home/user1/avocado/data/avocado-vt/lockdir  
EOF
```

Then verify with:

```
[user1@localhost] $ avocado config | grep plugins.vtjoblock  
...  
plugins.vtjoblock.dir          /home/user1/avocado/data/avocado-vt/lockdir  
...
```

Do the same thing for other users and their jobs will not be locked by one another.

## 6.14 Running in emulation mode (TCG)

Sometimes it's useful to run Avocado-vt in emulation mode (eg. when checking PR about different architecture, or to debug certain feature while executing the test). As this is not default, extra arguments are usually required.

Shared for all architectures is that you need the image. We supply JeOS for most of the architectures, so you should be able to get it via:

```
$ avocado vt-bootstrap --vt-guest-os JeOS.$VERSION.$ARCH
```

where:

- VERSION is JeOS version (when writing this document it was 27)
- ARCH is the desired architecture (eg. aarch64)

Or you can run any of the `unattended_install` tests with `--vt-guest-os` of your choice (very slow).

When running the tests, on top of the usual arguments, you usually need to specify:

- `--vt-qemu-bin` - path to binary that supports expected architecture (eg. `/usr/local/bin/qemu-system-aarch64`)
- `--vt-qemu-dst-bin` - for migration tests you need also to specify the destination qemu binary (otherwise default one is used)
- `enable_kvm=no` - to disable KVM (if necessary)

**Note:** Some test require additional dependencies and are marked as `no JeOS` (another group is marked as `only RHEL`) but it might be useful for debugging purposes to use them with JeOS. You can do that by symlinking the `$avocado-vt-data/images/jeos-$version-$arch.qcow2` to `$avocado-vt-data/images/rhel${version}devel-$arch.qcow2` and using the boot test with `--vt-guest-os RHEL.$version`. To add extra packages use `ctrl+Z` when it's about to ssh in. Then you can ssh to that guest from your machine, run `dnf install ...` to install the extra packages (`gcc` suffices for most test), shut the machine down, backup it to `$name.backup` and resume the boot test by `ctrl+Z`. Obviously the test will fail, refreshes the image from `$name.backup` but since then you have slightly fatter JeOS symlinked to RHEL capable of running some extended tests without the need to run full installation in TCG mode. Beware, `vt-bootstrap` might overwrite the `.backup` from archive.

### 6.14.1 aarch64

ARM always requires `cpu_model` as well as `machine_type`. To get list of available models you can run `qemu-system-aarch64 -cpu help -M virt` (note: not all listed cpus are bootable). By default Avocado-vt uses `-machine $machine_type,gic-version=host` to use host's GIC version, but this is not possible to evaluate in TCG (especially without GIC on x86) so one needs to either pick a fixed version or simply use qemu default by cleaning the `machine_type_extra_params`. Complete example would be:

```
$ avocado vt-bootstrap --vt-guest-os JeOS.27.aarch64
$ avocado --show all run --vt-extra-params enable_kvm=no cpu_model=cortex-a57 \
  machine_type_extra_params='' --vt-machine-type aarch64 --vt-arch arm64-pci \
  --vt-qemu-bin /usr/local/bin/qemu-system-aarch64 -- boot
```

### 6.14.2 ppc64/ppc64le

PowerPC can use either BE or LE instructions, but from qemu point of view nothing changes. Still for Avocado-vt you either have to specify `--vt-arch ppc64` or `--vt-arch ppc64le` to choose the right distribution image (both were available as JeOS when writing this document). Apart from this no additional tweaks are necessary:

```
$ avocado vt-bootstrap --vt-guest-os JeOS.27.ppc64
$ avocado --show all run --vt-extra-params enable_kvm=no --vt-arch ppc64 \
  --vt-machine-type pseries --vt-qemu-bin /usr/local/bin/qemu-system-ppc64 -- boot
```

(continues on next page)

(continued from previous page)

```
$ avocado vt-bootstrap --vt-guest-os JeOS.27.ppc64le
$ avocado --show all run --vt-extra-params enable_kvm=no --vt-arch ppc64le \
  --vt-machine-type pseries --vt-qemu-bin /usr/local/bin/qemu-system-ppc64 -- boot
```

### 6.14.3 s390x

For KVM execution Avocado-vt uses `-cpu host` on s390x, which is not possible without KVM. To execute in TCG mode you need to replace it with either a supported CPU type or simply leave it blank:

```
$ avocado vt-bootstrap --vt-guest-os JeOS.27.s390x
$ avocado --show all run --vt-extra-params enable_kvm=no cpu_model='' --vt-arch s390x \
↪ \
  --vt-machine-type s390-virtio --vt-qemu-bin /usr/local/bin/qemu-system-s390x -- \
↪ boot
```

### 6.14.4 riscv64

When writing this document, riscv64 was not available as JeOS and even Fedora support was not straight forward. See [‘riscv64\\_setup’](#) for setup instructions. Apart from the setup running riscv64 does not require any additional arguments:

```
$ avocado run --vt-machine-type riscv64-mmio --vt-arch riscv64 \
  --vt-extra-params enable_kvm=no --vt-guest-os Fedora.28 -- boot
```

## 6.15 Contribution and Community Guide

Contents:

### 6.15.1 Contact information

Currently there is no dedicated Avocado-vt communication channel, but you can use main Avocado-framework channels to reach us:

- Avocado mailing list (hosted by red hat)
- IRC channel: `irc.oftc.net #avocado`

### 6.15.2 Downloading the Source

The main source is maintained on git and may be cloned as below:

```
git clone https://github.com/avocado-framework/avocado-vt.git
```

If you want to learn how to use git as an effective contribution tool, consider reading [the git workflow autotest docs](#)

### 6.15.3 Avocado VT Development Workflow

<http://avocado-framework.readthedocs.org/en/latest/ContributionGuide.html>

### 6.15.4 Contributions Guidelines and Tips

#### Code

Contributions of additional tests and code are always welcome. If in doubt, and/or for advice on approaching a particular problem, please contact the projects members (see section `_collaboration`) Before submitting code, please review the [git repository configuration guidelines](#).

To submit changes, please follow [these instructions](#). Please allow up to two weeks for a maintainer to pick up and review your changes. Though, if you'd like help at any stage, feel free to post on the mailing lists and reference your pull request.

#### Docs

Please edit the documentation directly to correct any minor inaccuracies or to clarify items. The preferred markup syntax is [ReStructuredText](#), keeping with the conventions and style found in existing documentation. For any graphics or diagrams, web-friendly formats should be used, such as PNG or SVG.

Avoid using 'you', 'we', 'they', as they can be ambiguous in reference documentation. It works fine in conversation and e-mail, but looks weird in reference material. Similarly, avoid using 'unnecessary', off-topic, or extra language. For example in American English, "Rinse and repeat" is a funny phrase, but could cause problems when translated into other languages. Basically, try to avoid anything that slows the reader down from finding facts.

## 6.16 Experimental features

### 6.16.1 riscv64

The support for riscv64 is very experimental and requires special preparations. Basically you need to prepare your system according to:

<https://fedorapeople.org/groups/risc-v/disk-images/readme.txt>

Which means you need to install latest `qemu-system-riscv` (tested with `qemu 00928a421d47f49691cace1207481b7aad31b1f1`) or install the one provided by Rich:

<https://copr.fedorainfracloud.org/coprs/rjones/riscv/>

And you need to download a suitable image and bootable kernel to the right location:

- kernel: <https://fedorapeople.org/groups/risc-v/disk-images/bbl> needs to be downloaded in `$AVOCADO_VT_DATA/images/f28-riscv64-kernel`
- image: <https://fedorapeople.org/groups/risc-v/disk-images/stage4-disk.img.xz> needs to be downloaded in `$AVOCADO_VT_DATA/images/`, extracted and converted to `qcow2` using name `f28-riscv64.qcow2`.

Basically you can go into `$AVOCADO_VT_DATA/images` and execute:

```
curl https://fedorapeople.org/groups/risc-v/disk-images/bbl -o f28-riscv64-kernel
curl https://fedorapeople.org/groups/risc-v/disk-images/stage4-disk.img.xz | xz -d >
↪stage4-disk.img
qemu-img convert -f raw -O qcow2 stage4-disk.img f28-riscv64.qcow2
rm stage4-disk.img
```

Also I'd recommend booting the guest:

```
qemu-system-riscv64 \
  -nographic \
  -machine virt \
  -smp 4 \
  -m 2G \
  -kernel f28-riscv64-kernel \
  -object rng-random,filename=/dev/urandom,id=rng0 \
  -device virtio-rng-device,rng=rng0 \
  -append "console=ttyS0 ro root=/dev/vda" \
  -device virtio-blk-device,drive=hd0 \
  -drive file=f28-riscv64.qcow2,format=qcow2,id=hd0 \
  -device virtio-net-device,netdev=usernet \
  -netdev user,id=usernet,hostfwd=tcp::10000-:22
```

and running the Fedora-25.ks post-install steps:

```
dnf -y install @standard @c-development @development-tools python net-tools sg3_utils_
↪python-pip
grubby --remove-args="rhgb quiet" --update-kernel=$(grubby --default-kernel)
dhclient
chkconfig sshd on
iptables -F
systemctl mask tmp.mount
echo 0 > /selinux/enforce
sed -i "/^HWADDR/d" /etc/sysconfig/network-scripts/ifcfg-eth0
# if package groups were missing from main installation repo
# try again from installed system
dnf -y groupinstall c-development development-tools
# include avocado: allows using this machine with remote runner
# Fallback to pip as it's not yet built for riscv64
dnf -y install python2-avocado || pip install python2-avocado
```

---

**Tip:** If you want to use riscv without kvm (eg. on x86 host) use something like avocado run --vt-machine-type riscv64-mmio --vt-arch riscv64 --vt-extra-params enable\_kvm=no --vt-guest-os Fedora.28 -- boot which sets the right machine/arch and disables kvm (uses tcg).

---

## 7.1 virttest

### 7.1.1 virttest package

#### Subpackages

virttest.libvirt\_xml package

#### Subpackages

virttest.libvirt\_xml.devices package

#### Submodules

virttest.libvirt\_xml.devices.address module

virttest.libvirt\_xml.devices.base module

virttest.libvirt\_xml.devices.channel module

virttest.libvirt\_xml.devices.character module

virttest.libvirt\_xml.devices.console module

virttest.libvirt\_xml.devices.controller module

`virttest.libvirt_xml.devices.disk` module

`virttest.libvirt_xml.devices.emulator` module

`virttest.libvirt_xml.devices.filesystem` module

`virttest.libvirt_xml.devices.filterref` module

`virttest.libvirt_xml.devices.graphics` module

`virttest.libvirt_xml.devices.hostdev` module

`virttest.libvirt_xml.devices.hub` module

`virttest.libvirt_xml.devices.input` module

`virttest.libvirt_xml.devices.interface` module

`virttest.libvirt_xml.devices.iommu` module

`virttest.libvirt_xml.devices.lease` module

`virttest.libvirt_xml.devices.librarian` module

`virttest.libvirt_xml.devices.memballoon` module

`virttest.libvirt_xml.devices.memory` module

`virttest.libvirt_xml.devices.panic` module

`virttest.libvirt_xml.devices.parallel` module

`virttest.libvirt_xml.devices.redirdev` module

`virttest.libvirt_xml.devices.rng` module

`virttest.libvirt_xml.devices.seclabel` module

`virttest.libvirt_xml.devices.serial` module

`virttest.libvirt_xml.devices.smartcard` module

`virttest.libvirt_xml.devices.sound` module

`virttest.libvirt_xml.devices.video` module

`virttest.libvirt_xml.devices.vsock` module

`virttest.libvirt_xml.devices.watchdog` module

### Module contents

`virttest.libvirt_xml.nwfilter_protocols` package

### Submodules

`virttest.libvirt_xml.nwfilter_protocols.ah` module

`virttest.libvirt_xml.nwfilter_protocols.ah_ipv6` module

`virttest.libvirt_xml.nwfilter_protocols.all` module

`virttest.libvirt_xml.nwfilter_protocols.all_ipv6` module

`virttest.libvirt_xml.nwfilter_protocols.arp` module

`virttest.libvirt_xml.nwfilter_protocols.base` module

`virttest.libvirt_xml.nwfilter_protocols.esp` module

`virttest.libvirt_xml.nwfilter_protocols.esp_ipv6` module

`virttest.libvirt_xml.nwfilter_protocols.icmp` module

`virttest.libvirt_xml.nwfilter_protocols.icmpv6` module

`virttest.libvirt_xml.nwfilter_protocols.igmp` module

`virttest.libvirt_xml.nwfilter_protocols.ip` module

`virttest.libvirt_xml.nwfilter_protocols.ipv6` module

`virttest.libvirt_xml.nwfilter_protocols.librarian` module

`virttest.libvirt_xml.nwfilter_protocols.mac` module

`virttest.libvirt_xml.nwfilter_protocols.rarp` module

`virttest.libvirt_xml.nwfilter_protocols.sctp` module

`virttest.libvirt_xml.nwfilter_protocols.sctp_ipv6` module

virttest.libvirt\_xml.nwfilter\_protocols.stp module

virttest.libvirt\_xml.nwfilter\_protocols.tcp module

virttest.libvirt\_xml.nwfilter\_protocols.tcp\_ipv6 module

virttest.libvirt\_xml.nwfilter\_protocols.udp module

virttest.libvirt\_xml.nwfilter\_protocols.udp\_ipv6 module

virttest.libvirt\_xml.nwfilter\_protocols.udplite module

virttest.libvirt\_xml.nwfilter\_protocols.udplite\_ipv6 module

virttest.libvirt\_xml.nwfilter\_protocols.vlan module

## Module contents

### Submodules

virttest.libvirt\_xml.accessors module

virttest.libvirt\_xml.base module

virttest.libvirt\_xml.capability\_xml module

virttest.libvirt\_xml.domcapability\_xml module

virttest.libvirt\_xml.network\_xml module

virttest.libvirt\_xml.nodedev\_xml module

virttest.libvirt\_xml.nwfilter\_binding module

virttest.libvirt\_xml.nwfilter\_xml module

virttest.libvirt\_xml.pool\_xml module

virttest.libvirt\_xml.secret\_xml module

virttest.libvirt\_xml.snapshot\_xml module

virttest.libvirt\_xml.sysinfo\_xml module

virttest.libvirt\_xml.vm\_xml module

`virttest.libvirt_xml.vol_xml` module

`virttest.libvirt_xml.xcepts` module

## Module contents

`virttest.qemu_devices` package

## Submodules

`virttest.qemu_devices.qcontainer` module

`virttest.qemu_devices.qdevices` module

`virttest.qemu_devices.utils` module

Shared classes and functions (exceptions, ...)

**copyright** 2013 Red Hat Inc.

**exception** `virttest.qemu_devices.utils.DeviceError`

Bases: `exceptions.Exception`

General device exception

**exception** `virttest.qemu_devices.utils.DeviceHotplugError` (*device, reason, vmdev, ver\_out=None*)

Bases: `virttest.qemu_devices.utils.DeviceInsertError`

Fail to hotplug device

**exception** `virttest.qemu_devices.utils.DeviceInsertError` (*device, reason, vmdev*)

Bases: `virttest.qemu_devices.utils.DeviceError`

Fail to insert device

**exception** `virttest.qemu_devices.utils.DeviceRemoveError` (*device, reason, vmdev*)

Bases: `virttest.qemu_devices.utils.DeviceInsertError`

Fail to remove device

**exception** `virttest.qemu_devices.utils.DeviceUnplugError` (*device, reason, vmdev*)

Bases: `virttest.qemu_devices.utils.DeviceHotplugError`

Fail to unplug device

`virttest.qemu_devices.utils.none_or_int` (*value*)

Helper fction which returns None or int()

## Module contents

`virttest.remote_commander` package

## Submodules

## virttest.remote\_commander.messenger module

Created on Dec 6, 2013

**author** jzupka, astepano

**contact** Andrei Stepanov <astepano@redhat.com>

**class** virttest.remote\_commander.messenger.DataWrapper

Bases: `object`

Basic implementation of IOWrapper for stdio.

**decode** (*data*)

Decodes the data which was read.

**Returns** decoded data.

**encode** (*data*)

Encode data.

**Returns** encoded data.

**class** virttest.remote\_commander.messenger.DataWrapperBase64

Bases: `virttest.remote_commander.messenger.DataWrapper`

Basic implementation of IOWrapper for stdio.

**decode** (*data*)

Decodes the data which was read.

**Returns** decoded data.

**encode** (*data*)

Encode data.

**Returns** encoded data.

**class** virttest.remote\_commander.messenger.IOWrapper (*obj*)

Bases: `object`

Class encapsulates io operation to be more consist in different implementations. (stdio, sockets, etc..)

**Parameters** *obj* – IO obj for example file decriptor.

**close** ()

**fileno** ()

Function should return file descriptor number. If object should be used for standard io operation.

**Returns** File number.

**read** (*max\_len*, *timeout=None*)

Read function should be reinplemented as blocking reading from data source when timeout is None and nonblocking for timeout is not None. Implementation example StdIWrapper.

**Params** *max\_len* Max len of readed data.

**Parameters** *timeout* (*float*) – Timeout of reading operation.

**Returns** Readed data.

**write** (*data*)

Write fuciton should be implemented for object uded for writing.

**Parameters** *data* (*str.*) – Data to write.

**class** `virttest.remote_commander.messenger.Messenger` (*stdin*, *stdout*)

Bases: `object`

Class could be used for communication between two python process connected by communication canal wrapped by `IOWrapper` class. Pickling is used for communication and thus it is possible to communicate every picleable object.

**Params** `stdin` Object for read data from communication interface.

**Params** `stdout` Object for write data to communication interface.

**close** ()

**flush\_stdin** ()

Flush all input data from communication interface.

**format\_msg** (*data*)

Format message where first 10 char is length of message and rest is pickled message.

**read\_msg** (*timeout=None*)

Read data from com interface.

**Parameters** `timeout` (*float*) – timeout for reading data.

**Returns** (True, data) when reading is successful. (False, None) when other side is closed. (None, None) when reading is timeouted.

**write\_msg** (*data*)

Write formatted message to communication interface.

**exception** `virttest.remote_commander.messenger.MessengerError` (*msg*)

Bases: `exceptions.Exception`

**class** `virttest.remote_commander.messenger.StdIOWrapper` (*obj*)

Bases: `virttest.remote_commander.messenger.IOWrapper`, `virttest.remote_commander.messenger.DataWrapper`

Basic implementation of `IOWrapper` for stdio.

**Parameters** `obj` – IO obj for example file decriptor.

**close** ()

**fileno** ()

Function should return file descriptor number. If object should be used for standard io operation.

**Returns** File number.

**class** `virttest.remote_commander.messenger.StdIOWrapperIn` (*obj*)

Bases: `virttest.remote_commander.messenger.StdIOWrapper`

Basic implementation of `IOWrapper` for stdin

**Parameters** `obj` – IO obj for example file decriptor.

**read** (*max\_len*, *timeout=None*)

Read function should be reinplemented as blocking reading from data source when timeout is None and nonblocking for timeout is not None. Implementation example `StdIOWrapper`.

**Params** `max_len` Max len of readed data.

**Parameters** `timeout` (*float*) – Timeout of reading operation.

**Returns** Readed data.

**class** `virttest.remote_commander.messenger.StdIOWrapperInBase64` (*obj*)  
Bases: `virttest.remote_commander.messenger.StdIOWrapperIn`, `virttest.remote_commander.messenger.DataWrapperBase64`

Basic implementation of IOWrapper for stdin

**Parameters** `obj` – IO obj for example file decriptor.

**class** `virttest.remote_commander.messenger.StdIOWrapperOut` (*obj*)  
Bases: `virttest.remote_commander.messenger.StdIOWrapper`

Basic implementation of IOWrapper for stdout

**Parameters** `obj` – IO obj for example file decriptor.

**write** (*data*)

Write functon should be implemented for object uded for writing.

**Parameters** `data` (*str.*) – Data to write.

**class** `virttest.remote_commander.messenger.StdIOWrapperOutBase64` (*obj*)  
Bases: `virttest.remote_commander.messenger.StdIOWrapperOut`, `virttest.remote_commander.messenger.DataWrapperBase64`

Basic implementation of IOWrapper for stdout

**Parameters** `obj` – IO obj for example file decriptor.

## `virttest.remote_commander.remote_interface` module

Created on Dec 11, 2013

**author** jzupka, astepano

**contact** Andrei Stepanov <[astepano@redhat.com](mailto:astepano@redhat.com)>

**class** `virttest.remote_commander.remote_interface.BaseCmd` (*func\_cmd*, *\*args*, *\*\*kargs*)  
Bases: `virttest.remote_commander.remote_interface.CmdMessage`

Class used for moveing information about commands between master and slave.

**args**

**cmd\_hash**

**func**

**is\_async** ()

**Returns** True if command is async else False

**is\_finished** ()

**Returns** True if command is finished else False

**kargs**

**nh\_stderr**

**nh\_stdin**

**nh\_stdout**

**results**

**single\_cmd\_id** = 0

**update** (*basecmd*)

Sync local class with class moved over the messenger.

**Parameters** **basecmd** (*BaseCmd*) – basecmd from which should be sync data to this instance

**update\_cmd\_hash** (*basecmd*)

**class** `virttest.remote_commander.remote_interface.CmdMessage` (*cmd\_id*)

Bases: `object`

Base cmd message class

**cmd\_id**

**isCmdMsg** ()

**class** `virttest.remote_commander.remote_interface.CmdQuery` (*\*args, \*\*kwargs*)

Bases: `object`

Command-msg-request from VM to avocado-vt test.

Command for asking from VM to avocado-vt.

**Parameters**

- **args** – Something pickable. Is irrelevant for messenger.
- **kwargs** – Something pickable. Is irrelevant for messenger.

**class** `virttest.remote_commander.remote_interface.CmdRespond` (*respond*)

Bases: `object`

Command-msg-answer from avocado-test to VM.

Command for answering avocado-vt to VM.

**Parameters** **respond** – Something pickable. Is irrelevant for messenger.

**exception** `virttest.remote_commander.remote_interface.CmdTraceBack` (*msg*)

Bases: `exceptions.Exception`

Represent back-trace used for error tracing on remote side.

**exception** `virttest.remote_commander.remote_interface.CommanderError` (*msg*)

Bases: `virttest.remote_commander.remote_interface.MessengerError`

Represent error in Commander

**exception** `virttest.remote_commander.remote_interface.MessengerError` (*msg*)

Bases: `exceptions.Exception`

Represented error in messenger.

**class** `virttest.remote_commander.remote_interface.StdErr` (*msg, cmd\_id=None*)

Bases: `virttest.remote_commander.remote_interface.StdStream`

Represent message from stderr string data from remote client

**cmd\_id**

**msg**

**class** `virttest.remote_commander.remote_interface.Stdout` (*msg, cmd\_id=None*)

Bases: `virttest.remote_commander.remote_interface.StdStream`

Represent message from stdout string data from remote client

**cmd\_id**

**msg**

**class** `virttest.remote_commander.remote_interface.StdStream` (*msg*, *cmd\_id=None*)  
Bases: `virttest.remote_commander.remote_interface.CmdMessage`

Represent message string data from remote client

**msg**

## virttest.remote\_commander.remote\_master module

Created on Dec 6, 2013

**author** jzupka, astepano

**contact** Andrei Stepanov <astepano@redhat.com>

**class** `virttest.remote_commander.remote_master.CmdEncapsulation` (*master*,  
*obj\_name*,  
*name*)

Bases: `object`

Class parse command name `cmd.nohup.shell -> ["nohup", "shell"]`

**class** `virttest.remote_commander.remote_master.CmdMaster` (*commander*, *name*, *\*args*,  
*\*\*kargs*)

Bases: `object`

Representation of BaseCmd on master side.

**Params commander** Commander from which was command started.

**Params name** Name parsed to string representation

**Params args** list to arguments to cmd.

**Params kargs** {}

**basecmd**

Property basecmd getter

**getbasecmd** ()

Property basecmd getter

**getstderr** ()

Property stderr getter

**getstdout** ()

Property stdout getter

**send\_stdin** (*msg*)

Send data to stdin

**set\_commander** (*commander*)

For nohup commands it allows connect cmd to new created commander.

**setbasecmd** (*value*)

Property basecmd setter `_results_cnt` identify if value was change from last reading.

**setstderr** (*value*)

Property stderr setter `_stderr_cnt` identify if value was change from last reading.

**setstdout** (*value*)

Property stdout setter `_stdout_cnt` identify if value was change from last reading.

**stderr**

Property stderr getter

**stdout**

Property stdout getter

**wait ()**

Wait until command return results.

**wait\_response ()**

Wait until command return any cmd.

**exception** `virttest.remote_commander.remote_master.CmdTimeout (msg)`Bases: `virttest.remote_commander.remote_interface.MessengerError`

Raised when waiting for cmd exceeds time define by timeout.

**class** `virttest.remote_commander.remote_master.Commander`Bases: `object`

Commander representation for transfer over network.

**class** `virttest.remote_commander.remote_master.CommanderMaster (stdin, stdout, debug=False)`Bases: `virttest.remote_commander.messenger.Messenger`

Class commander master is responsible for communication with commander slave. It invoke commands to slave part and receive messages from them. For communication is used only stdin and stdout which are streams from slave part.

**close ()****cmd (cmd)**

Invoke command on client side.

**listen\_cmds (cmd)**

Manage basecmds from slave side.

**listen\_errors (cmd)**

Listen for errors raised from slave part of commander.

**listen\_messenger (timeout=60)**

Wait for msg from slave side and take care about them.

**listen\_queries (cmd)**

Manage queries from slave side.

**listen\_streams (cmd)**

Listen on all streams included in Commander commands.

**set\_responder (responder)**

**Warning** Users's helper becomes a part of a remote\_commander. remote\_commander is treated as a session. All sessions are part of BaseVM object. If you provide unpicklable helper then your BaseVM also becomes unpicklable. You can catch something like:

```
File "/usr/lib64/python2.7/copy_reg.py", line 74, in _reduce_ex
getstate = self.__getstate__
KeyError: '__getstate__'
```

For more info see:

<https://github.com/avocado-framework/avocado-vt/issues/455>

**wait** (*cmd*)

Wait until command return results.

**wait\_response** (*cmd*)

Wait until command return any cmd.

`virttest.remote_commander.remote_master.getsource` (*obj*)

`virttest.remote_commander.remote_master.wait_timeout` (*timeout*)

## virttest.remote\_commander.remote\_runner module

Created on Dec 6, 2013

**author** jzupka, astepano

**contact** Andrei Stepanov <astepano@redhat.com>

**class** `virttest.remote_commander.remote_runner.CmdFinish` (*parent=False*)

Bases: `object`

Class used for communication with child process. This class

**pid**

**class** `virttest.remote_commander.remote_runner.CmdSlave` (*baseCmd*)

Bases: `object`

Representation of BaseCmd on slave side.

**Parameters** **baseCmd** – basecmd for encapsulation.

**close\_pipes** ()

Close command communication pipe.

**finish** (*commander*)

Remove cmd from commander commands on finish of process.

**parse\_func\_name** (*func\_name, commander*)

Parse name sended from master.

format: ["manage|async|nohup| ", "fname1", "fname2", ...]

### Parameters

- **func\_name** – Function name
- **commander** – Where to execute the command (remote or local)

**recover\_fds** ()

Helper function for reconnect to daemon/nohup process.

**recover\_paths** ()

Helper function for reconnect to daemon/nohup process.

**work** ()

Wait for message from running child process

**class** `virttest.remote_commander.remote_runner.CommanderSlave` (*stdin, stdout, o\_stdout, o\_stderr*)

Bases: `virttest.remote_commander.messenger.Messenger`

Class commander slave is responsible for communication with commander master. It invoke commands to slave part and receive messages from them. For communication is used only stdin and stdout which are streams from slave part.

**cmd\_loop()**

Wait for commands from master and receive results and outputs from commands.

**class** `virttest.remote_commander.remote_runner.CommanderSlaveCmds` (*stdin, stdout, o\_stdout, o\_stderr*)

Bases: `virttest.remote_commander.remote_runner.CommanderSlave`

Class extends CommanderSlave and adds to them special commands like shell process, interactive python, send\_msg to cmd.

**add\_function** (*f\_code*)

Adds function to client code.

**Parameters** *f\_code* (*str.*) – Code of function.

**copy\_file** (*name, path, content*)

Really naive implementation of copying files. Should be used only for short files.

**exit()**

Method for killing command slave.

**import\_src** (*name, path=None*)

Import file to running python session.

**interactive()**

Starts interactive python.

**python\_file\_run\_with\_helper** (*test\_path*)

Call run() function at external python module.

**Parameters** *test\_path* – Path to python file. Call run() at this module.

**Returns** `module.run().return`

**register\_cmd** (*basecmd, basecmd\_cmd\_id*)

Second side of set\_commander cmd from master. It register existing cmd to CommandSlave dict.

**Parameters**

- **basecmd** (`BaseCmd`) – cmd which should be added to CommandSlave dict
- **basecmd\_cmd\_id** (*int*) – number under which should be stored

**send\_msg** (*msg, cmd\_id*)

Send msg to cmd with id == cmd\_id

**Parameters**

- **msg** (*str*) – message passed to cmd over the stdin
- **cmd\_id** – id of cmd.

**shell** (*cmd*)

Starts shell process. Stdout is automatically copied to basecmd.stdout

**Parameters** *cmd* – Command which should be started.

**Returns** `basecmd` with return code of cmd.

**class** `virttest.remote_commander.remote_runner.Helper` (*messenger*)

Bases: `object`

Passed to external test on VM.

**flush\_buf** ()

**info** (\*args, \*\*kwargs)

**messenger**

**query\_master** (\*args, \*\*kwargs)

Read CmdRespond from master.

`virttest.remote_commander.remote_runner.clean_tmp_dir` (path)

Clean up directory.

`virttest.remote_commander.remote_runner.close_unused_fds` (fds)

Close all file descriptors which are not necessary anymore.

**Parameters** `fds` (*builtin.list*) – file descriptors

`virttest.remote_commander.remote_runner.create_process_cmd` ()

Create child process without clean process data thanks that it is possible call function and classes from child process.

`virttest.remote_commander.remote_runner.daemonize` (pipe\_root\_path='tmp')

Init daemon.

**Parameters** `pipe_root_path` – path to directory for pipe.

**Returns** [True if child, stdin\_path, stdout\_path, stderr\_path]

`virttest.remote_commander.remote_runner.gen_tmp_dir` (root\_path)

Try to create tmp dir with special name.

`virttest.remote_commander.remote_runner.remote_agent` (in\_stream\_cls,  
out\_stream\_cls)

Connect file descriptors to right pipe and start slave command loop. When something happend it raise exception which could be caught by cmd master.

**Params** `in_stream_cls` Class encapsulated input stream.

**Params** `out_stream_cls` Class encapsulated output stream.

`virttest.remote_commander.remote_runner.sort_fds_event` (fds)

## Module contents

### virttest.staging package

#### Submodules

#### virttest.staging.lv\_utils module

#### virttest.staging.service module

#### virttest.staging.utils\_cgroup module

#### virttest.staging.utils\_koji module

## virttest.staging.utils\_memory module

### Module contents

## virttest.tests package

### Submodules

## virttest.tests.unattended\_install module

### Module contents

## virttest.unittest\_utils package

### Submodules

## virttest.unittest\_utils.mock module

**exception** `virttest.unittest_utils.mock.CheckPlaybackError`

Bases: `exceptions.Exception`

Raised when mock playback does not match recorded calls.

**class** `virttest.unittest_utils.mock.SaveDataAfterCloseStringIO (buf=)`

Bases: `StringIO.StringIO`

Saves the contents in a `final_data` property when `close()` is called.

Useful as a mock output file object to test both that the file was closed and what was written.

#### Properties:

**final\_data**: Set to the `StringIO`'s `getvalue()` data when `close()` is called. None if `close()` has not been called.

`close()`

`final_data = None`

**exception** `virttest.unittest_utils.mock.StubNotFoundError`

Bases: `exceptions.Exception`

Raised when god is asked to unstub an attribute that was not stubbed

**class** `virttest.unittest_utils.mock.anything_comparator`

Bases: `virttest.unittest_utils.mock.argument_comparator`

`is_satisfied_by (parameter)`

**class** `virttest.unittest_utils.mock.argument_comparator`

Bases: `object`

`is_satisfied_by (parameter)`

**class** `virttest.unittest_utils.mock.base_mapping (symbol, return_obj, *args, **dargs)`

Bases: `object`

`match (*args, **dargs)`

```

class virtttest.unitttest_utils.mock.equality_comparator (value)
    Bases: virtttest.unitttest_utils.mock.argument_comparator

    is_satisfied_by (parameter)

class virtttest.unitttest_utils.mock.function_any_args_mapping (symbol, return_val,
                                                                *args, **dargs)
    Bases: virtttest.unitttest_utils.mock.function_mapping
    A mock function mapping that doesn't verify its arguments.
    match (*args, **dargs)

class virtttest.unitttest_utils.mock.function_mapping (symbol, return_val, *args,
                                                         **dargs)
    Bases: virtttest.unitttest_utils.mock.base_mapping
    and_raises (error)
    and_return (return_obj)

class virtttest.unitttest_utils.mock.is_instance_comparator (cls)
    Bases: virtttest.unitttest_utils.mock.argument_comparator
    is_satisfied_by (parameter)

class virtttest.unitttest_utils.mock.is_string_comparator
    Bases: virtttest.unitttest_utils.mock.argument_comparator
    is_satisfied_by (parameter)

class virtttest.unitttest_utils.mock.mask_function (symbol, original_function,
                                                       default_return_val=None,
                                                       record=None, playback=None)
    Bases: virtttest.unitttest_utils.mock.mock_function
    run_original_function (*args, **dargs)

class virtttest.unitttest_utils.mock.mock_class (cls, name, default_ret_val=None,
                                                  record=None, playback=None)
    Bases: object

class virtttest.unitttest_utils.mock.mock_function (symbol, default_return_val=None,
                                                       record=None, playback=None)
    Bases: object
    expect_any_call ()
        Like expect_call but don't give a hoot what arguments are passed.
    expect_call (*args, **dargs)

class virtttest.unitttest_utils.mock.mock_god (debug=False, fail_fast=True, ut=None)
    Bases: object
    With debug=True, all recorded method calls will be printed as they happen. With fail_fast=True, unexpected
    calls will immediately cause an exception to be raised. With False, they will be silently recorded and only
    reported when check_playback() is called.
    NONEXISTENT_ATTRIBUTE = <object object>
    check_playback ()
        Report any errors that were encountered during calls to __method_playback().
    create_mock_class (cls, name, default_ret_val=None)
        Given something that defines a namespace cls (class, object, module), and a (hopefully unique) name, will

```

create a `mock_class` object with that name and that possesses all the public attributes of `cls`. `default_ret_val` sets the `default_ret_val` on all methods of the `cls` mock.

**create\_mock\_class\_obj** (*cls, name, default\_ret\_val=None*)

**create\_mock\_function** (*symbol, default\_return\_val=None*)

create a `mock_function` with name `symbol` and default return value of `default_ret_val`.

**mock\_io** ()

Mocks and saves the `stdout` & `stderr` output

**mock\_up** (*obj, name, default\_ret\_val=None*)

Given an object (class instance or module) and a registration name, then replace all its methods with mock function objects (passing the original functions to the mock functions).

**set\_fail\_fast** (*fail\_fast*)

**stub\_class** (*namespace, symbol*)

**stub\_class\_method** (*cls, symbol*)

**stub\_function** (*namespace, symbol*)

**stub\_function\_to\_return** (*namespace, symbol, object\_to\_return*)

Stub out a function with one that always returns a fixed value.

#### Parameters

- **namespace** – The namespace containing the function to stub out.
- **symbol** – The attribute within the namespace to stub out.
- **object\_to\_return** – The value that the stub should return whenever it is called.

**stub\_with** (*namespace, symbol, new\_attribute*)

**unmock\_io** ()

Restores the `stdout` & `stderr`, and returns both output strings

**unstub** (*namespace, symbol*)

**unstub\_all** ()

**class** `virttest.unittest_utils.mock.regex_comparator` (*pattern, flags=0*)

Bases: `virttest.unittest_utils.mock.argument_comparator`

**is\_satisfied\_by** (*parameter*)

## Module contents

`virttest.utils_test` package

### Subpackages

`virttest.utils_test.qemu` package

### Submodules

`virttest.utils_test.qemu.migration` module

## Module contents

### Submodules

`virttest.utils_test.libguestfs` module

`virttest.utils_test.libvirt` module

## Module contents

`virttest.utils_windows` package

### Submodules

`virttest.utils_windows.drive` module

Windows drive utilities

`virttest.utils_windows.drive.extend_volume` (*session*, *vol\_id*, *size=None*)  
Extend a volume in windows guest.

#### Parameters

- **session** – Session object.
- **vol\_id** – Drive letter or Volume number.
- **size** – Default extend the volume to maximum available size, if size is specified, extend the volume to size. The default unit of size is M.

`virttest.utils_windows.drive.get_floppy_drives_letter` (*session*)  
Get all the floppy drives' letter.

**Parameters** **session** – Session object.

**Returns** Floppy drives' letter.

`virttest.utils_windows.drive.get_hard_drive_letter` (*session*, *label*)  
Get hard drive's letter by the given label.

#### Parameters

- **session** – Session object.
- **label** – Label pattern string.

**Returns** Hard drive's letter if found, otherwise *None*.

`virttest.utils_windows.drive.rescan_disks` (*session*)  
Rescan disks in windows guest.

**Parameters** **session** – Session object.

`virttest.utils_windows.drive.shrink_volume` (*session*, *vol\_id*, *size*)  
Shrink a volume in windows guest.

#### Parameters

- **session** – Session object.
- **vol\_id** – Drive letter or Volume number.

- **size** – Desired decrease size. The default unit of size is M.

### virttest.utils\_windows.system module

Windows system utilities

`virttest.utils_windows.system.file_exists(session, filename)`  
Check if a file exists.

**Parameters**

- **session** – Session object.
- **filename** – File name with full path.

**Returns** bool value: True if file exists.

`virttest.utils_windows.system.os_arch(session)`  
Get Windows OS architecture.

**Parameters** **session** – Session object.

**Returns** Windows OS architecture.

`virttest.utils_windows.system.product_name(session)`  
Get Windows product name.

**Parameters** **session** – Session object.

**Returns** Windows product name.

`virttest.utils_windows.system.version(session)`  
Get Windows version.

**Parameters** **session** – Session object.

**Returns** Windows version.

### virttest.utils\_windows.virtio\_win module

Windows virtio-win utilities

`virttest.utils_windows.virtio_win.arch_dirname_iso(session)`  
Get architecture directory's name - iso media version.

**Parameters** **session** – Session object.

**Returns** Directory's name.

`virttest.utils_windows.virtio_win.arch_dirname_vfd(session)`  
Get architecture directory's name - vfd media version.

**Parameters** **session** – Session object.

**Returns** Directory's name.

`virttest.utils_windows.virtio_win.drive_letter_iso(session)`  
Get virtio-win drive letter - iso media version.

**Parameters** **session** – Session object.

**Returns** Drive letter.

`virttest.utils_windows.virtio_win.drive_letter_vfd(session)`

Get virtio-win drive letter - vfd media version.

**Parameters** `session` – Session object.

**Returns** Drive letter.

`virttest.utils_windows.virtio_win.product_dirname_iso(session)`

Get product directory's name - iso media version.

**Parameters** `session` – Session object.

**Returns** Directory's name.

`virttest.utils_windows.virtio_win.product_dirname_vfd(session)`

Get product directory's name - vfd media version.

**Parameters** `session` – Session object.

**Returns** Directory's name.

## virttest.utils\_windows.wmic module

Windows WMIC utilities

`virttest.utils_windows.wmic.is_noinstance(data)`

Check if the given WMIC data contains instance(s).

**Parameters** `data` – The given WMIC data.

**Returns** True if no instance(s), else False.

`virttest.utils_windows.wmic.make_query(cmd, cond=None, props=None, get_swch=None, gbl_swch=None)`

Make a WMIC query command. The command pattern is:

`wmic [GBL_SWCH] CMD [where COND] get [PROPS] [GET_SWCH]`

### Parameters

- **cmd** – WMIC command.
- **cond** – Query condition to be appended to *where*.
- **props** – Properties to be get.
- **get\_swch** – Local switch of *get*.
- **gbl\_swch** – Global switch.

**Returns** Query command.

`virttest.utils_windows.wmic.parse_list(data)`

Parse the given list format WMIC data.

**Parameters** `data` – The given WMIC data.

**Returns** Formated data.

## Module contents

### Submodules

**virttest.RFBDes module**

**virttest.arch module**

**virttest.asset module**

**virttest.base\_installer module**

**virttest.bootstrap module**

**virttest.build\_helper module**

**virttest.cartesian\_config module**

Cartesian configuration format file parser.

Filter syntax:

- , means OR
- .. means AND
- . means IMMEDIATELY-FOLLOWED-BY
- (xx=yy) where xx=VARIANT\_NAME and yy=VARIANT\_VALUE

Example:

```
qcow2..(guest_os=Fedora).14, RHEL.6..raw..boot, smp2..qcow2..migrate..ide
```

means match all dicts whose names have:

```
(qcow2 AND ((guest_os=Fedora) IMMEDIATELY-FOLLOWED-BY 14)) OR
((RHEL IMMEDIATELY-FOLLOWED-BY 6) AND raw AND boot) OR
(smp2 AND qcow2 AND migrate AND ide)
```

Note:

- qcow2..Fedora.14 is equivalent to Fedora.14..qcow2.
- qcow2..Fedora.14 is not equivalent to qcow2..14.Fedora.
- ide, scsi is equivalent to scsi, ide.

Filters can be used in 3 ways:

```
only <filter>
no <filter>
<filter>:
```

The last one starts a conditional block.

Formal definition: Regexp come from [python](#). They're not deterministic, but more readable for people. Spaces between terminals and nonterminals are only for better reading of definitions.

The base of the definitions come verbatim as follows:

```

E = {\n, #, :, "-", =, +=, <=, ?=, ?+=, ?<=, !, <, del, @, variants, include, only, ↵
↵no, name, value}

N = {S, DEL, FILTER, FILTER_NAME, FILTER_GROUP, PN_FILTER_GROUP, STAT, VARIANT, VAR-
↵TYPE, VAR-NAME, VAR-NAME-F, VAR, COMMENT, TEXT, DEPS, DEPS-NAME-F, META-DATA, ↵
↵IDENTIFIER}``

I = I^n | n in N           // indentation from start of line
                           // where n is indentation length.
I = I^n+x | n,x in N      // indentation with shift

start symbol = S
end symbol = eps

S -> I^0+x STATV | eps

I^n    STATV
I^n    STATV

I^n STATV -> I^n STATV \n I^n STATV | I^n STAT | I^n variants VARIANT
I^n STAT -> I^n STAT \n I^n STAT | I^n COMMENT | I^n include INC
I^n STAT -> I^n del DEL | I^n FILTER

DEL -> name \n

I^n STAT -> I^n name = VALUE | I^n name += VALUE | I^n name <= VALUE
I^n STAT -> I^n name ?= VALUE | I^n name ?+= VALUE | I^n name ?<= VALUE

VALUE -> TEXT \n | 'TEXT' \n | "TEXT" \n

COMMENT_BLOCK -> #TEXT | //TEXT
COMMENT -> COMMENT_BLOCK\n
COMMENT -> COMMENT_BLOCK\n

TEXT = [^\n] TEXT           //python format regexp

I^n    variants VAR #comments:           add possibility for comment
I^n+x    VAR-NAME: DEPS
I^n+x+x2    STATV
I^n    VAR-NAME:

IDENTIFIER -> [A-Za-z0-9][A-Za-z0-9_-]*

VARIANT -> VAR COMMENT_BLOCK\n I^n+x VAR-NAME
VAR -> VAR-TYPE: | VAR-TYPE META-DATA: | :           // Named | unnamed variant

VAR-TYPE -> IDENTIFIER

variants _name_ [xxx] [zzz=yyy] [uuu]:

META-DATA -> [IDENTIFIER] | [IDENTIFIER=TEXT] | META-DATA META-DATA

I^n VAR-NAME -> I^n VAR-NAME \n I^n VAR-NAME | I^n VAR-NAME-N \n I^n+x STATV
VAR-NAME-N -> - @VAR-NAME-F: DEPS | - VAR-NAME-F: DEPS
VAR-NAME-F -> [a-zA-Z0-9\.\_]+           // Python regexp

```

(continues on next page)

(continued from previous page)

```

DEPS -> DEPS-NAME-F | DEPS-NAME-F,DEPS
DEPS-NAME-F -> [a-zA-Z0-9\._- ]+           // Python regexp

INC -> name \n

FILTER_GROUP: STAT
    STAT

I^n STAT -> I^n PN_FILTER_GROUP | I^n ! PN_FILTER_GROUP

PN_FILTER_GROUP -> FILTER_GROUP: \n I^n+x STAT
PN_FILTER_GROUP -> FILTER_GROUP: STAT \n I^n+x STAT

only FILTER_GROUP
no FILTER_GROUP

FILTER -> only FILTER_GROUP \n | no FILTER_GROUP \n

FILTER_GROUP -> FILTER_NAME
FILTER_GROUP -> FILTER_GROUP..FILTER_GROUP
FILTER_GROUP -> FILTER_GROUP,FILTER_GROUP

FILTER_NAME -> FILTER_NAME.FILTER_NAME
FILTER_NAME -> VAR-NAME-F | (VAR-NAME-F=VAR-NAME-F)

```

**copyright** Red Hat 2008-2013

**class** virtttest.cartesian\_config.**BlockFilter** (*blocked*)

Bases: *object*

**apply\_to\_dict** (*d*)

**blocked**

**class** virtttest.cartesian\_config.**Condition** (*lfilter*, *line*)

Bases: *virtttest.cartesian\_config.NoFilter*

**content**

**class** virtttest.cartesian\_config.**FileReader** (*filename*)

Bases: *virtttest.cartesian\_config.StrReader*

Preprocess an input file for easy reading.

Initialize the reader.

**Parse filename** The name of the input file.

**class** virtttest.cartesian\_config.**Filter** (*lfilter*)

Bases: *object*

**filter**

**match** (*ctx*, *ctx\_set*)

**might\_match** (*ctx*, *ctx\_set*, *descendant\_labels*)

**class** virtttest.cartesian\_config.**JoinFilter** (*lfilter*, *line*)

Bases: *virtttest.cartesian\_config.NoOnlyFilter*

```
class virtttest.cartesian_config.LAnd
    Bases: virtttest.cartesian_config.Token

    identifier = '..'

class virtttest.cartesian_config.LAppend
    Bases: virtttest.cartesian_config.LOperators

    apply_to_dict (d)

    identifier = '+='

class virtttest.cartesian_config.LApplyPreDict
    Bases: virtttest.cartesian_config.LOperators

    apply_to_dict (d)

    identifier = 'apply_pre_dict'

    set_operands (name, value)

class virtttest.cartesian_config.LCoc
    Bases: virtttest.cartesian_config.Token

    identifier = '.'

class virtttest.cartesian_config.LColon
    Bases: virtttest.cartesian_config.Token

    identifier = ':'

class virtttest.cartesian_config.LComa
    Bases: virtttest.cartesian_config.Token

    identifier = ','

class virtttest.cartesian_config.LCond
    Bases: virtttest.cartesian_config.Token

    identifier = ''

class virtttest.cartesian_config.LDefault
    Bases: virtttest.cartesian_config.Token

    identifier = '@'

class virtttest.cartesian_config.LDel
    Bases: virtttest.cartesian_config.LOperators

    apply_to_dict (d)

    identifier = 'del'

class virtttest.cartesian_config.LDot
    Bases: virtttest.cartesian_config.Token

    identifier = '.'

class virtttest.cartesian_config.LEndBlock (length)
    Bases: virtttest.cartesian_config.LIndent

class virtttest.cartesian_config.LEndL
    Bases: virtttest.cartesian_config.Token

    identifier = 'endl'
```

```

class virttest.cartesian_config.LIdentifier
    Bases: str

    checkAlpha ()
        Check if string contain only chars

    checkChar (chars)

    checkCharAlpha (chars)
        Check if string contain only chars

    checkCharAlphaNum (chars)
        Check if string contain only chars

    checkCharNumeric (chars)
        Check if string contain only chars

    checkNumbers ()
        Check if string contain only chars

    identifier = 'Identifier re ([A-Za-z0-9] [A-Za-z0-9_-]*) '

class virttest.cartesian_config.LInclude
    Bases: virttest.cartesian_config.Token

    identifier = 'include'

class virttest.cartesian_config.LIndent (length)
    Bases: virttest.cartesian_config.Token

    identifier = 'indent'

    length

class virttest.cartesian_config.LJoin
    Bases: virttest.cartesian_config.Token

    identifier = 'join'

class virttest.cartesian_config.LLBracket
    Bases: virttest.cartesian_config.Token

    identifier = '['

class virttest.cartesian_config.LLRBracket
    Bases: virttest.cartesian_config.Token

    identifier = '('

class virttest.cartesian_config.LNo
    Bases: virttest.cartesian_config.Token

    identifier = 'no'

class virttest.cartesian_config.LNotCond
    Bases: virttest.cartesian_config.Token

    identifier = '!'

class virttest.cartesian_config.LOnly
    Bases: virttest.cartesian_config.Token

    identifier = 'only'

class virttest.cartesian_config.LOperators
    Bases: virttest.cartesian_config.Token

```

```
function = None
identifier = ''
name
set_operands (name, value)
value

class virtttest.cartesian_config.LOr
    Bases: virtttest.cartesian_config.Token
    identifier = ','

class virtttest.cartesian_config.LPrepend
    Bases: virtttest.cartesian_config.LOperators
    apply_to_dict (d)
    identifier = '<='

class virtttest.cartesian_config.LRBracket
    Bases: virtttest.cartesian_config.Token
    identifier = ']'

class virtttest.cartesian_config.LRRBracket
    Bases: virtttest.cartesian_config.Token
    identifier = ')'

class virtttest.cartesian_config.LRegExpAppend
    Bases: virtttest.cartesian_config.LOperators
    apply_to_dict (d)
    identifier = '?+='

class virtttest.cartesian_config.LRegExpPrepend
    Bases: virtttest.cartesian_config.LOperators
    apply_to_dict (d)
    identifier = '?<='

class virtttest.cartesian_config.LRegExpSet
    Bases: virtttest.cartesian_config.LOperators
    apply_to_dict (d)
    identifier = '?='

class virtttest.cartesian_config.LRegExpStart
    Bases: virtttest.cartesian_config.Token
    identifier = '${'

class virtttest.cartesian_config.LRegExpStop
    Bases: virtttest.cartesian_config.Token
    identifier = '}'

class virtttest.cartesian_config.LSet
    Bases: virtttest.cartesian_config.LOperators
    apply_to_dict (d)
```

Parameters **d** – Dictionary for apply value

```

identifier = '='

class virttest.cartesian_config.LString
  Bases: virttest.cartesian_config.LIdentifier

  identifier = 'String re(.+)'

class virttest.cartesian_config.LSuffix
  Bases: virttest.cartesian_config.Token

  identifier = 'suffix'

class virttest.cartesian_config.LUpdateFileMap
  Bases: virttest.cartesian_config.LOperators

  apply_to_dict (d)

  dest

  identifier = 'update_file_map'

  set_operands (filename, name, dest='_name_map_file')

  shortname

class virttest.cartesian_config.LVariant
  Bases: virttest.cartesian_config.Token

  identifier = '-'

class virttest.cartesian_config.LVariants
  Bases: virttest.cartesian_config.Token

  identifier = 'variants'

class virttest.cartesian_config.LWhite
  Bases: virttest.cartesian_config.LIdentifier

  identifier = 'WhiteSpace re(\\s)'
```

```

class virttest.cartesian_config.Label (name, next_name=None)
  Bases: object

  hash_name ()

  hash_val

  hash_var

  hash_variant ()

  long_name

  name

  var_name

class virttest.cartesian_config.Lexer (reader)
  Bases: object

  check_token (token, lType)

  flush_until (end_tokens=None)

  get_lexer ()

  get_next_check (lType)

```

`get_next_check_nw` (*lType*)

`get_until` (*end\_tokens=None*)

`get_until_check` (*lType, end\_tokens=None*)

Read tokens from iterator until get *end\_tokens* or type of token not match *ltype*

**Parameters**

- **lType** – List of allowed tokens
- **end\_tokens** – List of tokens for end reading

**Returns** List of readed tokens.

`get_until_gen` (*end\_tokens=None*)

`get_until_no_white` (*end\_tokens=None*)

Read tokens from iterator until get one of *end\_tokens* and strip LWhite

**Parameters** **end\_tokens** – List of tokens for end reading

**Returns** List of readed tokens.

`match` (*line, pos*)

`rest_line` ()

`rest_line_as_LString` ()

`rest_line_gen` ()

`rest_line_no_white` ()

`set_fast` ()

`set_prev_indent` (*prev\_indent*)

`set_strict` ()

**exception** `virttest.cartesian_config.LexerError` (*msg, line=None, filename=None, linenum=None*)

Bases: `virttest.cartesian_config.ParserError`

**exception** `virttest.cartesian_config.MissingIncludeError` (*line, filename, linenum*)

Bases: `exceptions.Exception`

**class** `virttest.cartesian_config.NegativeCondition` (*lfilter, line*)

Bases: `virttest.cartesian_config.OnlyFilter`

**content**

**class** `virttest.cartesian_config.NoFilter` (*lfilter, line*)

Bases: `virttest.cartesian_config.NoOnlyFilter`

**is\_irrelevant** (*ctx, ctx\_set, descendant\_labels*)

**might\_pass** (*failed\_ctx, failed\_ctx\_set, ctx, ctx\_set, descendant\_labels*)

**requires\_action** (*ctx, ctx\_set, descendant\_labels*)

**class** `virttest.cartesian_config.NoOnlyFilter` (*lfilter, line*)

Bases: `virttest.cartesian_config.Filter`

**line**

**class** `virttest.cartesian_config.Node`

Bases: `object`

```

append_to_shortname
children
content
default
dep
dump (indent, recurse=False)
failed_cases
filename
labels
name
q_dict
var_name
class virttest.cartesian_config.OnlyFilter (lfilter, line)
    Bases: virttest.cartesian_config.NoOnlyFilter
is_irrelevant (ctx, ctx_set, descendant_labels)
might_pass (failed_ctx, failed_ctx_set, ctx, ctx_set, descendant_labels)
requires_action (ctx, ctx_set, descendant_labels)
class virttest.cartesian_config.Parser (filename=None, defaults=False, ex-
                                         pand_defaults=[], debug=False)
    Bases: object
assign (key, value)
    Apply a only filter programatically and keep track of it.
    Equivalent to parse a “key = value” line.
        Parameters variant – String with the variant name.
drop_suffixes (d)
get_dicts (node=None, ctx=[], content=[], shortname=[], dep=[])
    Process ‘join’ entry, unpack join filter for node ctx - node labels/names content - previous content in plain
    Return: dictionary
get_dicts_plain (node=None, ctx=[], content=[], shortname=[], dep=[])
    Generate dictionaries from the code parsed so far. This should be called after parsing something.
        Returns A dict generator.
mk_name (n1, n2)
multiply_join (onlys, node=None, ctx=[], content=[], shortname=[], dep=[])
no_filter (variant)
    Apply a only filter programatically and keep track of it.
    Equivalent to parse a “no variant” line.
        Parameters variant – String with the variant name.

```

**only\_filter** (*variant*)

Apply a only filter programatically and keep track of it.

Equivalent to parse a “only variant” line.

**Parameters** **variant** – String with the variant name.

**parse\_file** (*filename*)

Parse a file.

**Parameters** **filename** – Path of the configuration file.

**parse\_string** (*s*)

Parse a string.

**Parameters** **s** – String to parse.

**exception** `virttest.cartesian_config.ParserError` (*msg*, *line=None*, *filename=None*, *linenum=None*)

Bases: `exceptions.Exception`

**class** `virttest.cartesian_config.StrReader` (*s*)

Bases: `object`

Preprocess an input string for easy reading.

Initialize the reader.

**Parameters** **s** – The string to parse.

**get\_next\_line** (*prev\_indent*)

Get the next line in the current block.

**Parameters** **prev\_indent** – The indentation level of the previous block.

**Returns** (line, indent, linenum), where indent is the line’s indentation level. If no line is available, (None, -1, -1) is returned.

**set\_next\_line** (*line*, *indent*, *linenum*)

Make the next call to `get_next_line()` return the given line instead of the real next line.

**class** `virttest.cartesian_config.Suffix`

Bases: `virttest.cartesian_config.LOperators`

**apply\_to\_dict** (*d*)

**identifier** = 'apply\_suffix'

**class** `virttest.cartesian_config.Token`

Bases: `object`

**identifier** = ''

`virttest.cartesian_config.apply_predict` (*lexer*, *node*, *pre\_dict*)

`virttest.cartesian_config.cmd_tokens` (*tokens1*, *tokens2*)

`virttest.cartesian_config.compare_string` (*str1*, *str2*)

Compare two int string and return -1, 0, 1. It can compare two memory value even in suffix

**Parameters**

- **str1** – The first string
- **str2** – The second string

**Return** Rteurn -1, when `str1 < str2` 0, when `str1 = str2` 1, when `str1 > str2`

`virttest.cartesian_config.convert_data_size` (*size*, *default\_suffix='B'*)  
 Convert data size from human readable units to an int of arbitrary size.

**Parameters**

- **size** – Human readable data size representation (string).
- **default\_suffix** – Default suffix used to represent data.

**Returns** Int with data size in the appropriate order of magnitude.

`virttest.cartesian_config.next_nw` (*gener*)

`virttest.cartesian_config.parse_filter` (*lexer*, *tokens*)

**Returns** Parsed filter

`virttest.cartesian_config.postfix_parse` (*dic*)

`virttest.cartesian_config.print_dicts` (*options*, *dicts*)

`virttest.cartesian_config.print_dicts_default` (*options*, *dicts*)  
 Print dictionaries in the default mode

`virttest.cartesian_config.print_dicts_repr` (*options*, *dicts*)

## virttest.ceph module

### virttest.compat\_52lts module

This module contains helpers that allows running Avocado-vt with Avocado master as well as with 52.x LTS release.

`virttest.compat_52lts.decode_to_text` (*stream*, *encoding='UTF-8'*, *errors='strict'*)

Decode decoding string :param stream: string stream :param encoding: encode\_type :param errors: error handling to use while decoding (strict,replace, ignore,...)

**Returns** encoding text

`virttest.compat_52lts.results_stderr_52lts` (*result*)

Get decoded stderr text in 52.x LTS backward compatible way

**Parameters** **result** – result object

`virttest.compat_52lts.results_stdout_52lts` (*result*)

Get decoded stdout text in 52.x LTS backward compatible way

**Parameters** **result** – result object

### virttest.data\_dir module

### virttest.defaults module

`virttest.defaults.get_default_guest_os_info` ()

Gets the default asset and variant information TODO: Check for the ARCH and choose corresponding default asset

## virttest.element\_path module

**class** virttest.element\_path.**Path** (*path*)

**find** (*element*)

**findall** (*element*)

**findtext** (*element*, *default=None*)

virttest.element\_path.**find** (*element*, *path*)

virttest.element\_path.**findall** (*element*, *path*)

virttest.element\_path.**findtext** (*element*, *path*, *default=None*)

**class** virttest.element\_path.**xpath\_descendant\_or\_self**

virttest.element\_path.**xpath\_tokenizer** ()

**findall**(string[, pos[, endpos]]) -> list. Return a list of all non-overlapping matches of pattern in string.

## virttest.element\_tree module

virttest.element\_tree.**Comment** (*text=None*)

virttest.element\_tree.**dump** (*elem*)

virttest.element\_tree.**Element** (*tag*, *attrib={}*, *\*\*extra*)

**class** virttest.element\_tree.**ElementTree** (*element=None*, *file=None*)

Bases: object

**find** (*path*)

**findall** (*path*)

**findtext** (*path*, *default=None*)

**getiterator** (*tag=None*)

**getroot** ()

**parse** (*source*, *parser=None*)

**write** (*file*, *encoding='us-ascii'*)

virttest.element\_tree.**fromstring** (*text*)

virttest.element\_tree.**iselement** (*element*)

**class** virttest.element\_tree.**iterparse** (*source*, *events=None*)

Bases: object

**next** ()

virttest.element\_tree.**parse** (*source*, *parser=None*)

virttest.element\_tree.**PI** (*target*, *text=None*)

virttest.element\_tree.**ProcessingInstruction** (*target*, *text=None*)

**class** virttest.element\_tree.**QName** (*text\_or\_uri*, *tag=None*)

Bases: object

virttest.element\_tree.**SubElement** (*parent*, *tag*, *attrib={}*, *text=None*, *\*\*extra*)

```

virttest.element_tree.tostring (element, encoding=None)
class virttest.element_tree.TreeBuilder (element_factory=None)
    Bases: object
    close ()
    data (data)
    end (tag)
    start (tag, attrs)
virttest.element_tree.XML (text)
virttest.element_tree.XMLParser
    alias of virttest.element_tree.XMLTreeBuilder
class virttest.element_tree.XMLTreeBuilder (html=0, target=None)
    Bases: object
    close ()
    doctype (name, pubid, system)
    feed (data)

```

### virttest.env\_process module

### virttest.error\_context module

```

virttest.error_context.format_error ()
virttest.error_context.context_aware (fn)
    A decorator that must be applied to functions that call context().
virttest.error_context.context (s="", log=None)
    Set the context for the currently executing function and optionally log it.

```

#### Parameters

- **s** – A string. If not provided, the context for the current function will be cleared.
- **log** – A logging function to pass the context message to. If None, no function will be called.

```

virttest.error_context.get_context ()
    Return the current context (or None if none is defined).
virttest.error_context.exception_context (e)
    Return the context of a given exception (or None if none is defined).

```

### virttest.funcatexit module

### virttest.gluster module

### virttest.guest\_agent module

## virttest.http\_server module

**class** virttest.http\_server.**HTTPRequestHandler** (*request, client\_address, server*)

Bases: SimpleHTTPServer.SimpleHTTPRequestHandler

**address\_string** ()

This HTTP server does not care about name resolution for the requests

The first reason is that most of the times our clients are going to be virtual machines without a proper name resolution setup. Also, by not resolving names, we should be a bit faster and be resilient about misconfigured or resilient name servers.

**copyfile\_range** (*source\_file, output\_file, range\_begin, range\_end*)

Copies a range of a file to destination.

**do\_GET** ()

Serve a GET request.

**log\_message** (*fmt, \*args*)

**parse\_header\_byte\_range** ()

**send\_head\_range** (*range\_begin, range\_end*)

**translate\_path** (*path*)

Translate a /-separated PATH to the local filename syntax.

Components that mean special things to the local file system (e.g. drive or directory names) are ignored. (XXX They should probably be diagnosed.)

virttest.http\_server.**http\_server** (*port=8000, cwd=None, terminate\_callable=None*)

## virttest.installer module

## virttest.ip\_sniffing module

## virttest.iscsi module

## virttest.kernel\_interface module

## virttest.libvirt\_installer module

## virttest.libvirt\_storage module

## virttest.libvirt\_vm module

## virttest.logging\_manager module

**class** virttest.logging\_manager.**LoggingFile** (*prefix=*, *level=10*, *logger=<logging.RootLogger object>*)

Bases: `object`

File-like object that will receive messages pass them to the logging infrastructure in an appropriate way.

:param prefix - The prefix for each line logged by this object.

**flush** ()

**isatty** ()

**write** (*data*)

” Writes data only if it constitutes a whole line. If it’s not the case, store it in a buffer and wait until we have a complete line. :param data - Raw data (a string) that will be processed.

**writelines** (*lines*)

” Writes iterable of lines

**Parameters** **lines** – An iterable of strings that will be processed.

`virttest.logging_manager.do_not_report_as_logging_caller` (*func*)

Decorator to annotate functions we will tell logging not to log.

## virttest.lvm module

## virttest.lvsb module

Higher order classes and functions for Libvirt Sandbox (lxc) container testing

**copyright** 2013 Red Hat Inc.

**class** `virttest.lvsb.TestBaseSandboxes` (*params, env*)

Bases: `virttest.lvsb_base.TestSandboxes`

Simplistic sandbox aggregate manager

Initialize to run, all SandboxCommandBase’s

**command\_suffixes** ()

Append command after a –

**results** (*each\_timeout=5*)

Run sandboxe(s), allowing each\_timeout to complete, return output list

**class** `virttest.lvsb.TestComplexSandboxes` (*params, env*)

Bases: `virttest.lvsb.TestBaseSandboxes`

Executes a command with complex options

**class** `virttest.lvsb.TestSimpleSandboxes` (*params, env*)

Bases: `virttest.lvsb.TestBaseSandboxes`

Executes a command with simple options

Initialize to run, all SandboxCommandBase’s

`virttest.lvsb.make_sandboxes` (*params, env, extra\_ns=None*)

Return list of instantiated lvsb\_testsandboxes classes from params

### Parameters

- **params** – an undiluted Params instance
- **env** – the current env instance
- **extra\_ns** – An extra, optional namespace to search for classes

## virttest.lvsb\_base module

Base classes supporting Libvirt Sandbox (lxc) container testing

**copyright** 2013 Red Hat Inc.

```
class virttest.lvsb_base.SandboxBase (params)
    Bases: object

    Base operations for sandboxed command

    Create a new sandbox interface instance based on this type from params

auto_clean (boolean)
    Change behavior of asynchronous background sandbox process on __del__

exit_code ()
    Block until asynchronous background sandbox process ends, returning code

fini ()
    Finalize asynchronous background sandbox process (destroys state!)

instances = None

make_sandbox_command_line (extra=None)
    Return the fully formed command-line for the sandbox using self.options

recv ()
    Return stdout and stderr from asynchronous background sandbox process

recverr ()
    return only stderr from asynchronous background sandbox process

recvout ()
    Return only stdout from asynchronous background sandbox process

run (extra=None)
    Launch new sandbox as asynchronous background sandbox process

        Parameters extra – String of extra command-line to use but not store

running ()
    Return True/False if asynchronous background sandbox process executing

send (data)
    Send data to asynchronous background sandbox process

stop ()
    Destroy but don't finalize asynchronous background sandbox process

class virttest.lvsb_base.SandboxCommandBase (params, name=None)
    Bases: virttest.lvsb_base.SandboxBase

    Connection to a single new or existing sandboxed command

    Initialize sandbox-command with params and name, autogenerate if None

BINARY_PATH_PARAM = 'virt_sandbox_binary'

add_flag (option)
    Add a flag into the list of command line options

add_mm ()
    Append a - to the end of the current option list

add_optarg (option, argument)
    Add an option with an argument into the list of command line options

add_pos (argument)
    Add a positional option into the list of command line options
```

**static flatten\_options** (*options*)  
Convert a list of tuples into space-separated options+argument string

**list\_flags** ()  
Return a list of all flags (options without arguments)

**list\_long\_options** ()  
Return a list of all long options with an argument

**list\_pos** ()  
Return a list of all positional arguments

**list\_short\_options** ()  
Return a list of all short options with an argument

**make\_sandbox\_command\_line** (*extra=None*)  
Return entire command-line string needed to start sandbox

**name**  
Represent a unique sandbox name generated from class and identifier

**exception** `virttest.lvsb_base.SandboxException` (*message*)  
Bases: `exceptions.Exception`  
Basic exception class for problems occurring in `SandboxBase` or subclasses

**class** `virttest.lvsb_base.SandboxSession`  
Bases: `object`

Connection instance to asynchronous I/O redirector process

**auto\_clean** (*boolean*)  
Make session cleanup on GC if True

**close\_session** (*warn\_if\_nonexist=True*)  
Finalize assigned opaque session object

**connected**  
Represents True/False value if background process was created/opened

**exit\_code** ()  
Block, and return exit code from session

**is\_running** ()  
Return True if `exit_code()` would block

**kill\_session** (*sig=15*)  
Send a signal to the opaque session object

**new\_session** (*command*)  
Create and set new opaque session object

**open\_session** (*a\_id*)  
Restore connection to existing session identified by `a_id`

**recv** ()  
Return combined stdout/stderr output received so far

**recvrr** ()  
Return just stderr output

**recvout** ()  
Return just stdout output

**send** (*a\_string*)

Send *a\_string* to session

**session\_id**

Returns unique & persistent identifier for the background process

**used = False**

**class** `virttest.lvsb_base.TestSandboxes` (*params, env*)

Bases: `object`

Aggregate manager class of `SandboxCommandBase` or subclass instances

Create instance(s) of sandbox from a command

**SANDBOX\_TYPE**

alias of `SandboxCommandBase`

**are\_failed** ()

Return the number of sandbox processes with non-zero exit codes

**are\_running** ()

Return the number of sandbox processes still running

**for\_each** (*do\_something, \*args, \*\*dargs*)

Iterate over all sandboxes, calling *do\_something* on each

**Parameters** *do\_something* – Called with the item and *\*args, \*\*dargs*

**init\_sandboxes** ()

Create `self.count` `Sandbox` instances

**virttest.lvsbs module**

**virttest.nfs module**

**virttest.openvswitch module**

**virttest.ovirt module**

**virttest.ovs\_utils module**

**virttest.passfd module**

**virttest.passfd\_setup module**

**virttest.postprocess\_iozone module**

**virttest.ppm\_utils module**

Utility functions to deal with ppm (qemu screendump format) files.

**copyright** Red Hat 2008-2009

`virttest.ppm_utils.add_timestamp` (*image, timestamp, margin=2*)

Return an image object with timestamp bar added at the bottom.

param *image*: pillow image object param *timestamp*: timestamp in seconds since the Epoch param *margin*: timestamp margin, default is 2

`virttest.ppm_utils.cal_hamming_distance(h1, h2)`

Calculate the hamming distance

`virttest.ppm_utils.find_id_for_screendump(md5sum, data_dir)`

Search dir for a PPM file whose name ends with md5sum.

**Parameters**

- **md5sum** – md5 sum string
- **dir** – Directory that holds the PPM files.

**Returns** The file's basename without any preceding path, e.g. 20080101\_120000\_d41d8cd98f00b204e9800998ecf8427e.ppm

`virttest.ppm_utils.generate_id_for_screendump(md5sum, data_dir)`

Generate a unique filename using the given MD5 sum.

**Returns** Only the file basename, without any preceding path. The filename consists of the current date and time, the MD5 sum and a .ppm extension, e.g. 20080101\_120000\_d41d8cd98f00b204e9800998ecf8427e.ppm.

`virttest.ppm_utils.get_data_dir(steps_filename)`

Return the data dir of the given steps filename.

`virttest.ppm_utils.get_region_md5sum(width, height, data, x1, y1, dx, dy, cropped_image_filename=None)`

Return the md5sum of a cropped region.

**Parameters**

- **width** – Original image width
- **height** – Original image height
- **data** – Image data
- **x1** – Desired x coord of the cropped region
- **y1** – Desired y coord of the cropped region
- **dx** – Desired width of the cropped region
- **dy** – Desired height of the cropped region
- **cropped\_image\_filename** – if not None, write the resulting cropped image to a file with this name

`virttest.ppm_utils.have_similar_img(base_img, comp_img_path, threshold=10)`

Check whether comp\_img\_path have a image looks like base\_img.

`virttest.ppm_utils.image_average_hash(image, img_wd=8, img_ht=8)`

Resize and convert the image, then get image data as sequence object, calculate the average hash :param image: an image path or an opened image object

`virttest.ppm_utils.image_comparison(width, height, data1, data2)`

Generate a green-red comparison image from two given images.

**Parameters**

- **width** – Width of both images
- **height** – Height of both images
- **data1** – Data of first image
- **data2** – Data of second image

**Returns** A 3-element tuple containing the width, height and data of the generated comparison image.

**Note** Input images must be the same size.

`virttest.ppm_utils.image_crop` (*width, height, data, x1, y1, dx, dy*)

Crop an image.

**Parameters**

- **width** – Original image width
- **height** – Original image height
- **data** – Image data
- **x1** – Desired x coordinate of the cropped region
- **y1** – Desired y coordinate of the cropped region
- **dx** – Desired width of the cropped region
- **dy** – Desired height of the cropped region

**Returns** A 3-tuple containing the width, height and data of the cropped image.

`virttest.ppm_utils.image_crop_save` (*image, new\_image, box=None*)

Crop an image and save it to a new image.

**Parameters**

- **image** – Full path of the original image
- **new\_image** – Full path of the cropped image
- **box** – A 4-tuple defining the left, upper, right, and lower pixel coordinate.

**Returns** True if crop and save image succeed

`virttest.ppm_utils.image_fuzzy_compare` (*width, height, data1, data2*)

Return the degree of equality of two given images.

**Parameters**

- **width** – Width of both images
- **height** – Height of both images
- **data1** – Data of first image
- **data2** – Data of second image

**Returns** Ratio `equal_pixel_count / total_pixel_count`.

**Note** Input images must be the same size.

`virttest.ppm_utils.image_histogram_compare` (*image\_a, image\_b, size=(0, 0)*)

Compare the histogram of two images and return similar degree.

**Parameters**

- **image\_a** – Full path of the first image
- **image\_b** – Full path of the second image
- **size** – Convert image to size(width, height), and if size=(0, 0), the function will convert the big size image align with the small one.

`virttest.ppm_utils.image_md5sum` (*width, height, data*)

Return the md5sum of an image.

**Parameters**

- **width** – PPM file width
- **height** – PPM file height
- **data** – PPM file data

`virttest.ppm_utils.image_read_from_ppm_file(filename)`

Read a PPM image.

**Returns** A 3 element tuple containing the width, height and data of the image.

`virttest.ppm_utils.image_verify_ppm_file(filename)`

Verify the validity of a PPM file.

**Parameters** **filename** – Path of the file being verified.

**Returns** True if filename is a valid PPM image file. This function reads only the first few bytes of the file so it should be rather fast.

`virttest.ppm_utils.image_write_to_ppm_file(filename, width, height, data)`

Write a PPM image with the given width, height and data.

**Parameters**

- **filename** – PPM file path
- **width** – PPM file width (pixels)
- **height** – PPM file height (pixels)

`virttest.ppm_utils.img_ham_distance(base_img, comp_img)`

Calculate two images hamming distance

`virttest.ppm_utils.img_similar(base_img, comp_img, threshold=10)`

check whether two images are similar by hamming distance

`virttest.ppm_utils.md5eval(data)`

Returns a md5 hash evaluator. This function is implemented in order to encapsulate objects in a way that is compatible with python 2.4 and python 2.6 without warnings.

**Parameters** **data** – Optional input string that will be used to update the object.

**virttest.propcan module**

Class which allows property and dict-like access to a fixed set of instance attributes. Attributes are locked by `__slots__`, however accessor methods may be created/removed on instances, or defined by the subclass. An `INITIALIZED` attribute is provided to signal completion of `__init__()` for use by accessor methods (i.e. so they know when `__init__` may be setting values).

Subclasses must define a `__slots__` class attribute containing the list of attribute names to reserve. All additional subclass descendents must explicitly copy `__slots__` from the parent in their definition.

Users of subclass instances are expected to get/set/del attributes only via the standard object or dict-like interface. i.e.

```
instance.attribute = whatever or instance['attribute'] = whatever
```

Internally, methods are free to call the accessor methods. Only accessor methods should use the special `__dict_*__()` and `__super_*__()` methods. These are there to allow convenient access to the internal dictionary values and subclass-defined attributes (such as `__slots__`).

example:

```

class A(PropCan):
    # Class with *attributes*
    __slots__ = ('a', 'b')
    # 'a' has defined a set/get/del by definition of method with prefix
    #     set_a, get_a, del_a
    # 'b' doesn't have defined set/get/del then classic set/get/del will be
    #     called instead.

    def __init__(self, a=1, b='b'):
        super(A, self).__init__(a, b)

    def set_a(self, value)
        # If is_instance(obj, A) then obj.a = "val" call this method.
        self.__dict_set__("a", value)

    def get_a(self, value)
        # If is_instance(obj, A) then xx = obj.a call this method.
        return self.__dict_get__("a")

    def del_a(self, value)
        # If is_instance(obj, A) then del obj.a call this method.
        self.__dict_del__("a")

class B(PropCan):
    # Class without *attributes*
    # ***** Even if class doesn't have attributes there should be
    # defined __slots__ = []. Because it is preferred by new style of class.
    # *****
    __slots__ = []

    def __init__(self):
        super(B, self).__init__()

```

**class** virttest.propcan.PropCan(\*args, \*\*dargs)

Bases: *virttest.propcan.PropCanBase*

Special value handling on retrieval of None values

Initialize contents directly or by way of accessors

#### Parameters

- **args** – Initial values for `__slots__` keys, same as dict.
- **dargs** – Initial values for `__slots__` keys, same as dict.

**has\_key**(key)

D.\_\_contains\_\_(k) -> True if D has a key k, else False

**items**() → list of D's (key, value) pairs, as 2-tuples

**keys**() → list of D's keys

**set\_if\_none**(key, value)

Set the value of key, only if it's not set or None

**set\_if\_value\_not\_none** (*key, value*)  
Set the value of key, only if value is not None

**values** () → list of D's values

**class** `virttest.propcan.PropCanBase` (*\*args, \*\*dargs*)  
Bases: `dict`, `virttest.propcan.PropCanInternal`

Objects with optional accessor methods and dict-like access to fixed set of keys

Initialize contents directly or by way of accessors

#### Parameters

- **args** – Initial values for `__slots__` keys, same as dict.
- **dargs** – Initial values for `__slots__` keys, same as dict.

**INITIALIZED** = **False**

**copy** ()  
Copy properties by value, not by reference.

**update** (*other=None, except=<type 'exceptions.AttributeError'>, \*\*kwargs*)  
Update properties in `__all_slots__` with another dict.

**class** `virttest.propcan.PropCanInternal`  
Bases: `object`

Semi-private methods for use only by PropCanBase subclasses (NOT instances)

**class** `virttest.propcan.classproperty`  
Bases: `property`

**virttest.qemu\_installer** module

**virttest.qemu\_io** module

**virttest.qemu\_monitor** module

**virttest.qemu\_qtree** module

**virttest.qemu\_storage** module

**virttest.qemu\_virtio\_port** module

**virttest.qemu\_vm** module

**virttest.remote** module

**virttest.remote\_build** module

**virttest.rss\_client** module

Client for file transfer services offered by RSS (Remote Shell Server).

**author** Michael Goldish ([mgoldish@redhat.com](mailto:mgoldish@redhat.com))

**copyright** 2008-2010 Red Hat Inc.

```
class virttest.rss_client.FileDownloadClient (address, port, log_func=None, timeout=20)
```

Bases: `virttest.rss_client.FileTransferClient`

Connect to a RSS (remote shell server) and download files or directory trees.

Connect to a server.

#### Parameters

- **address** – The server’s address
- **port** – The server’s port
- **log\_func** – If provided, transfer stats will be passed to this function during the transfer
- **timeout** – Time duration to wait for connection to succeed

#### Raises

- **`FileTransferConnectError`** – Raised if the connection fails
- **`FileTransferProtocolError`** – Raised if an incorrect magic number is received
- **`FileTransferSendError`** – Raised if the RSS\_UPLOAD message cannot be sent to the server

```
download (src_pattern, dst_path, timeout=600)
```

Receive files or directory trees from the server. The semantics of `src_pattern` and `dst_path` are similar to those of `scp`.

For example, the following are OK:

```
src_pattern='C:\foo.txt', dst_path='/tmp'  
    (downloads a single file)  
src_pattern='C:\Windows', dst_path='/tmp'  
    (downloads a directory tree recursively)  
src_pattern='C:\Windows\*', dst_path='/tmp'  
    (downloads all files and directory trees under C:\Windows)
```

The following is not OK:

```
src_pattern='C:\Windows', dst_path='/tmp/*'  
    (wildcards are only allowed in src_pattern)
```

#### Parameters

- **src\_pattern** – A path or wildcard pattern specifying the files or directories, in the server’s filesystem, that will be sent to the client
- **dst\_path** – A path in the local filesystem where the files will be saved
- **timeout** – Time duration in seconds to wait for the transfer to complete

#### Raises

- **`FileTransferTimeoutError`** – Raised if timeout expires
- **`FileTransferServerError`** – Raised if something goes wrong and the server sends an informative error message to the client

**Note** Other exceptions can be raised.

```
class virttest.rss_client.FileTransferClient (address, port, log_func=None, timeout=20)
```

Bases: `object`

Connect to a RSS (remote shell server) and transfer files.

Connect to a server.

#### Parameters

- **address** – The server’s address
- **port** – The server’s port
- **log\_func** – If provided, transfer stats will be passed to this function during the transfer
- **timeout** – Time duration to wait for connection to succeed

**Raises** `FileTransferConnectError` – Raised if the connection fails

```
close ()
```

Close the connection.

```
exception virttest.rss_client.FileTransferConnectError (msg, e=None, filename=None)
```

Bases: `virttest.rss_client.FileTransferError`

```
exception virttest.rss_client.FileTransferError (msg, e=None, filename=None)
```

Bases: `exceptions.Exception`

```
exception virttest.rss_client.FileTransferNotFoundError (msg, e=None, filename=None)
```

Bases: `virttest.rss_client.FileTransferError`

```
exception virttest.rss_client.FileTransferProtocolError (msg, e=None, filename=None)
```

Bases: `virttest.rss_client.FileTransferError`

```
exception virttest.rss_client.FileTransferServerError (errmsg)
```

Bases: `virttest.rss_client.FileTransferError`

```
exception virttest.rss_client.FileTransferSocketError (msg, e=None, filename=None)
```

Bases: `virttest.rss_client.FileTransferError`

```
exception virttest.rss_client.FileTransferTimeoutError (msg, e=None, filename=None)
```

Bases: `virttest.rss_client.FileTransferError`

```
class virttest.rss_client.FileUploadClient (address, port, log_func=None, timeout=20)
```

Bases: `virttest.rss_client.FileTransferClient`

Connect to a RSS (remote shell server) and upload files or directory trees.

Connect to a server.

#### Parameters

- **address** – The server’s address
- **port** – The server’s port
- **log\_func** – If provided, transfer stats will be passed to this function during the transfer
- **timeout** – Time duration to wait for connection to succeed

#### Raises

- `FileTransferConnectError` – Raised if the connection fails

- ***FileTransferProtocolError*** – Raised if an incorrect magic number is received
- ***FileTransferSocketError*** – Raised if the RSS\_UPLOAD message cannot be sent to the server

**upload** (*src\_pattern*, *dst\_path*, *timeout=600*)  
Send files or directory trees to the server.

The semantics of *src\_pattern* and *dst\_path* are similar to those of `scp`. For example, the following are OK:

```
src_pattern='/tmp/foo.txt', dst_path='C:\'  
    (uploads a single file)  
src_pattern='/usr/', dst_path='C:\Windows\  
    (uploads a directory tree recursively)  
src_pattern='/usr/*', dst_path='C:\Windows\  
    (uploads all files and directory trees under /usr/)
```

The following is not OK:

```
src_pattern='/tmp/foo.txt', dst_path='C:\Windows\*'  
    (wildcards are only allowed in src_pattern)
```

### Parameters

- **src\_pattern** – A path or wildcard pattern specifying the files or directories to send to the server
- **dst\_path** – A path in the server's filesystem where the files will be saved
- **timeout** – Time duration in seconds to wait for the transfer to complete

### Raises

- ***FileTransferTimeoutError*** – Raised if timeout expires
- ***FileTransferServerError*** – Raised if something goes wrong and the server sends an informative error message to the client

**Note** Other exceptions can be raised.

`virttest.rss_client.download` (*address*, *port*, *src\_pattern*, *dst\_path*, *log\_func=None*, *timeout=60*, *connect\_timeout=20*)

Connect to server and upload files.

:see:: FileDownloadClient

`virttest.rss_client.main` ()

`virttest.rss_client.upload` (*address*, *port*, *src\_pattern*, *dst\_path*, *log\_func=None*, *timeout=60*, *connect\_timeout=20*)

Connect to server and upload files.

:see:: FileUploadClient

### virttest.scan\_autotest\_results module

Program that parses the autotest results and return a nicely printed final test result.

**copyright** Red Hat 2008-2009

`virttest.scan_autotest_results.main` (*resfiles*)

`virttest.scan_autotest_results.parse_results` (*text*)  
Parse text containing Autotest results.

**Returns** A list of result 4-tuples.

`virttest.scan_autotest_results.print_result` (*result*, *name\_width*)  
Nicely print a single Autotest result.

**Parameters**

- **result** – a 4-tuple
- **name\_width** – test name maximum width

`virttest.scheduler` module

`virttest.ssh_key` module

`virttest.standalone_test` module

`virttest.step_editor` module

`virttest.storage` module

`virttest.syslog_server` module

**class** `virttest.syslog_server.RequestHandler` (*request*, *client\_address*, *server*)

Bases: `SocketServer.BaseRequestHandler`

A request handler that relays all received messages as DEBUG

**FACILITY\_NAMES** = {0: 'kern', 1: 'user', 2: 'mail', 3: 'daemon', 4: 'security', 5:

**LOG\_ALERT** = 1

**LOG\_AUTH** = 4

**LOG\_AUTHPRIV** = 10

**LOG\_CRIT** = 2

**LOG\_CRON** = 9

**LOG\_DAEMON** = 3

**LOG\_DEBUG** = 7

**LOG\_EMERG** = 0

**LOG\_ERR** = 3

**LOG\_FTP** = 11

**LOG\_INFO** = 6

**LOG\_KERN** = 0

**LOG\_LOCAL0** = 16

**LOG\_LOCAL1** = 17

**LOG\_LOCAL2** = 18

**LOG\_LOCAL3** = 19

LOG\_LOCAL4 = 20

LOG\_LOCAL5 = 21

LOG\_LOCAL6 = 22

LOG\_LOCAL7 = 23

LOG\_LPR = 6

LOG\_MAIL = 2

LOG\_NEWS = 7

LOG\_NOTICE = 5

LOG\_SYSLOG = 5

LOG\_USER = 1

LOG\_UUCP = 8

LOG\_WARNING = 4

PRIORITY\_NAMES = {0: 'emerg', 1: 'alert', 2: 'critical', 3: 'err', 4: 'warning', ...}

RECORD\_RE = <\_sre.SRE\_Pattern object>

**decodeFacilityPriority** (*priority*)

Decode both the facility and priority embedded in a syslog message

**Parameters** *priority* (*integer*) – an integer with facility and priority encoded

**Returns** a tuple with two strings

**log** (*data*, *message\_format=None*)

Logs the received message as a DEBUG message

**class** `virttest.syslog_server.RequestHandlerTcp` (*request*, *client\_address*, *server*)

Bases: `virttest.syslog_server.RequestHandler`

**handle** ()

Handles a single request

**class** `virttest.syslog_server.RequestHandlerUdp` (*request*, *client\_address*, *server*)

Bases: `virttest.syslog_server.RequestHandler`

**handle** ()

Handles a single request

**class** `virttest.syslog_server.SysLogServerTcp` (*address*)

Bases: `SocketServer.TCPServer`

**class** `virttest.syslog_server.SysLogServerUdp` (*address*)

Bases: `SocketServer.UDPServer`

`virttest.syslog_server.get_default_format` ()

Returns the current default message format

`virttest.syslog_server.set_default_format` (*message\_format*)

Changes the default message format

**Parameters** *message\_format* (*string*) – a message format string with 3 placeholders: facility, priority and message.

`virttest.syslog_server.syslog_server` (*address="*, *port=514*, *tcp=True*, *terminate\_callable=None*)

## virttest.test\_setup module

## virttest.utils\_config module

**exception** `virttest.utils_config.ConfigError` (*msg*)  
 Bases: `exceptions.Exception`

**exception** `virttest.utils_config.ConfigNoOptionError` (*option, path*)  
 Bases: `virttest.utils_config.ConfigError`

**class** `virttest.utils_config.LibvirtConfigCommon` (*path=""*)  
 Bases: `virttest.utils_config.SectionlessConfig`

A abstract class to manipulate options of a libvirt related configure files in a property's way.

Variables “`__option_types__`” and “`conf_path`” must be setup in the inherited classes before use.

“`__option_types__`” is a dict contains every possible option as keys and their type (“boolean”, “int”, “string”, “float” or “list”) as values.

Basic usage: 1) Create a config file object: `>>> # LibvirtdConfig is a subclass of LibvirtConfigCommon. >>> config = LibvirtdConfig()`

2) Set or update an option: `>>> config.listen_tcp = True >>> config.listen_tcp = 1 >>> config.listen_tcp = "1"`  
 # All three have the same effect.

```
>>> # If the setting value don't meet the specified type.
>>> config.listen_tcp = "invalid"
>>> # It'll thown an warning message and set a raw string instead.
```

```
>>> # Use set_* methods when need to customize the result.
>>> config.set_raw("'1'")
```

3) Get an option: `>>> is_listening = config.listen_tcp >>> print is_listening True`

4) Delete an option from the config file: `>>> del config.listen_tcp`

5) Make the changes take effect in libvirt by restart libvirt daemon. `>>> from virttest import utils_libvirtd >>> utils_libvirtd.Libvirtd().restart()`

6) Restore the content of the config file. `>>> config.restore()`

`conf_path = ''`

**exception** `virttest.utils_config.LibvirtConfigUnknownKeyError` (*key*)  
 Bases: `virttest.utils_config.ConfigError`

**exception** `virttest.utils_config.LibvirtConfigUnknownKeyTypeError` (*key, key\_type*)  
 Bases: `virttest.utils_config.ConfigError`

**class** `virttest.utils_config.LibvirtGuestsConfig` (*path=""*)  
 Bases: `virttest.utils_config.LibvirtConfigCommon`

Class for sysconfig libvirt-guests config file.

`conf_path = '/etc/sysconfig/libvirt-guests'`

**class** `virttest.utils_config.LibvirtQemuConfig` (*path=""*)  
 Bases: `virttest.utils_config.LibvirtConfigCommon`

Class for libvirt qemu config file.

`conf_path = '/etc/libvirt/qemu.conf'`

```
class virtttest.utils_config.LibvirtSanLockConfig (path="")
    Bases: virtttest.utils_config.LibvirtConfigCommon
```

Class for libvirt san lock config file.

```
    conf_path = '/etc/libvirt/qemu-sanlock.conf'
```

```
class virtttest.utils_config.LibvirtdConfig (path="")
    Bases: virtttest.utils_config.LibvirtConfigCommon
```

Class for libvirt daemon config file.

```
    conf_path = '/etc/libvirt/libvirtd.conf'
```

```
class virtttest.utils_config.LibvirtdSysConfig (path="")
    Bases: virtttest.utils_config.LibvirtConfigCommon
```

Class for sysconfig libvirtd config file.

```
    conf_path = '/etc/sysconfig/libvirtd'
```

```
    distro = ('debian', 'buster/sid', '')
```

```
class virtttest.utils_config.SectionlessConfig (path)
    Bases: object
```

This is a wrapper class for python's internal library configparser except allows manipulating sectionless configuration file with a dict-like way.

Example config file test.conf:

```
># This is a comment line. >a = 1 >b = [hi, there] >c = hello >d = "hi, there" >e = [hi, > there]
```

Example script using *try...finally...* statement:

```
>>> from virtttest import utils_config
>>> config = utils_config.SectionlessConfig('test.conf')
>>> try:
...     print len(config)
...     print config
...     print config['a']
...     del config['a']
...     config['f'] = 'test'
...     print config
... finally:
...     config.restore()
```

Example script using *with* statement:

```
>>> from virtttest import utils_config
>>> with utils_config.SectionlessConfig('test.conf') as config:
...     print len(config)
...     print config
...     print config['a']
...     del config['a']
...     config['f'] = 'test'
...     print config
```

**get\_boolean** (*option*)

**get\_float** (*option*)

**get\_int** (*option*)

`get_list` (*option*)  
`get_raw` (*option*)  
`get_string` (*option*)  
`restore` ()  
`set_boolean` (*option*, *value*)  
`set_float` (*option*, *value*)  
`set_int` (*option*, *value*)  
`set_list` (*option*, *value*)  
`set_raw` (*option*, *value*)  
`set_string` (*option*, *value*)

`virttest.utils_conn` module

`virttest.utils_disk` module

`virttest.utils_env` module

`virttest.utils_gdb` module

`virttest.utils_hotplug` module

`virttest.utils_iptables` module

`virttest.utils_libguestfs` module

`virttest.utils_libvirtd` module

`virttest.utils_misc` module

`virttest.utils_net` module

`virttest.utils_netperf` module

`virttest.utils_npiv` module

`virttest.utils_numeric` module

`virttest.utils_numeric.align_value` (*value*, *factor=1024*)

Value will be factored to the mentioned number.

**Parameters**

- **value** – value to be checked or changed to factor
- **factor** – value used for align

**Returns** aligned value

`virttest.utils_numeric.format_size_human_readable` (*value*, *binary=False*, *precision='%.2f'*)

Format a number of bytesize to a human readable filesize.

By default, decimal suffixes and base:10\*\*3 will be used. :param binary: use binary suffixes (KiB, MiB) and use 2\*10 as base :param precision: format string to specify precision for float

`virttest.utils_numeric.normalize_data_size` (*value\_str*, *order\_magnitude='M'*, *factor=1024*)

Normalize a data size in one order of magnitude to another.

#### Parameters

- **value\_str** – a string include the data default unit is ‘B’
- **order\_magnitude** – the magnitude order of result
- **factor** – int, the factor between two relative order of magnitude. Normally could be 1024 or 1000

:return normalized data size string

[virttest.utils\\_package module](#)

[virttest.utils\\_params module](#)

[virttest.utils\\_sasl module](#)

[virttest.utils\\_selinux module](#)

[virttest.utils\\_spice module](#)

[virttest.utils\\_stress module](#)

[virttest.utils\\_time module](#)

[virttest.utils\\_v2v module](#)

[virttest.utils\\_version module](#)

**class** `virttest.utils_version.VersionInterval` (*interval*)

Bases: `object`

A class for a Version Interval object.

An interval is a string representation of a mathematical like interval. e.g: “(3,4]”, “[3.10.0,)” A version is a version string.

#### Examples::

```
>>> verison_interval = VersionInterval("[2.10.1, 2.11.0)")
>>> verison = "2.10.16"
>>> verison in verison_interval
True
>>> verison = "2.13.0"
>>> verison in verison_interval
False
```

**virttest.utils\_virtio\_port module****virttest.version module****virttest.versionable\_class module**

**class** `virttest.versionable_class.Manager` (*name*, *wrapper=None*)

Bases: `object`

Manager for module.

**Parameters**

- **name** (*string*) – Name of module.
- **wrapper** – Module dictionary wrapper. Should be None.

**factory** (*\_class*, *\*args*, *\*\*kargs*)

Create new class with right version of subclasses.

Goes through class structure and search subclasses with right version.

**Parameters**

- **\_class** (*class.*) – Class which should be prepared.
- **args** – Params for `_is_right_ver` function.

**Params kargs** Params for `_is_right_ver` function.

**getcls** (*cls*, *orig\_class*)

Return class correspond class and original class.

**Parameters**

- **cls** (*class*) – class for which should be found derived alternative.
- **orig\_class** (*class*) – Original class

**Returns** Derived alternative class

**Return type** `class`

**class** `virttest.versionable_class.ModuleWrapper` (*wrapped*)

Bases: `object`

Wrapper around module.

Necessary for pickling of dynamic class.

**Parameters wrapped** (*Module.*) – module for wrapping.

**class** `virttest.versionable_class.VersionableClass`

Bases: `object`

Class used for marking of mutable class.

If this method is invoked it means that something went wrong because this class should be replaced by `Manager` factory.

`virttest.versionable_class.factory` (*orig\_cls*, *\*args*, *\*\*kargs*)

Create class with specific version.

**Parameters**

- **orig\_class** – Class from which should be derived good version.

- **args** – list of parameters for `_ir_right_ver`

**Params** `kargs` dict of named parameters for `_ir_right_ver`

**Returns** params specific class.

**Return type** class

`virttest.versionable_class.isclass(obj)`

**Parameters** `obj` – Object for inspection if obj is class.

**Returns** true if the object is a class.

### virttest.video\_maker module

Video Maker transforms screenshots taken during a test into a HTML 5 compatible video, so that one can watch the screen activity of the whole test from inside your own browser.

This relies on generally available multimedia libraries, frameworks and tools.

`virttest.video_maker.get_video_maker_klass()`

`virttest.video_maker.video_maker(input_dir, output_file)`  
Instantiates the encoder and encodes the input dir.

### virttest.virsh module

### virttest.virt\_admin module

### virttest.virt\_vm module

### virttest.vt\_console module

### virttest.xml\_utils module

Utility module standardized on ElementTree 2.6 to minimize dependencies in python 2.4 systems.

Often operations on XML files suggest making a backup copy first is a prudent measure. However, it's easy to loose track of these temporary files and they can quickly leave a mess behind. The TempXMLFile class helps by trying to clean up the temporary file whenever the instance is deleted, goes out of scope, or an exception is thrown.

The XMLBackup class extends the TempXMLFile class by basing its file- like instances off of an automatically created TempXMLFile instead of pointing at the source. Methods are provided for overwriting the backup copy from the source, or restoring the source from the backup. Similar to TempXMLFile, the temporary backup files are automatically removed. Access to the original source is provided by the sourcefilename attribute.

An interface for querying and manipulating XML data is provided by the XMLTreeFile class. Instances of this class are BOTH file-like and ElementTree-like objects. Whether or not they are constructed from a file or a string, the file-like instance always represents a temporary backup copy. Access to the source (even when itself is temporary) is provided by the sourcefilename attribute, and a (closed) file object attribute sourcebackupfile. See the ElementTree documentation for methods provided by that class.

Finally, the TemplateXML class represents XML templates that support dynamic keyword substitution based on a dictionary. Substitution keys in the XML template (string or file) follow the 'bash' variable reference style (`$foo` or `${bar}`). Extension of the parser is possible by subclassing TemplateXML and overriding the ParserClass class attribute. The parser class should be an ElementTree.TreeBuilder class or subclass. Instances of XMLTreeFile are returned by the parse method, which are themselves temporary backups of the parsed content. See the xml\_utils\_unittest module for examples.

**class** `virttest.xml_utils.Sub` (\*\**mapping*)

Bases: `object`

String substituter using `string.Template`

Initialize substitution mapping.

**substitute** (*text*)

Use `string.safe_substitute` on *text* and return the result

**Parameters** *text* – string to substitute

**class** `virttest.xml_utils.TempXMLFile` (*suffix*='.xml', *prefix*='xml\_utils\_temp\_', *mode*='w+',  
*buffsz*=1)

Bases: `object`

Temporary XML file auto-removed on instance del / module exit.

Initialize temporary XML file removed on instance destruction.

param: *suffix*: temporary file's suffix param: *prefix*: temporary file's prefix param: *mode*: second parameter to `file()/open()` param: *buffer*: third parameter to `file()/open()`

**close** ()

Close file

**flush** ()

Flush buffer.

**read** (*size*=None)

Read file content at most *size* bytes, returned as a string.

**readline** (*size*=None)

Read next line file content from the file, as a string.

**readlines** (*size*=None)

Read list of strings, each a line from the file.

**seek** (*offset*, *whence*=0)

Seek offset of one opened file

**tell** ()

returns the current position of the file read/write pointer within file.

**truncate** (*size*)

Truncate the file to at most *size* bytes.

**unlink** ()

Unconditionally delete file, ignoring related exceptions

**write** (*content*)

Write content to the file.

**class** `virttest.xml_utils.TemplateXML` (*xml*, \*\**mapping*)

Bases: `virttest.xml_utils.XMLTreeFile`

Template-sourced XML ElementTree backed by temporary file.

Initialize from a XML string or filename, and `string.template` mapping.

**Parameters**

- **xml** – A filename or string containing XML
- **mapping** – keys/values to feed with XML to `string.template`

**ParserClass**

alias of *TemplateXMLTreeBuilder*

**parse** (*source*, *parser=None*)

Parse source XML file or filename using TemplateXMLTreeBuilder

**Parameters**

- **source** – XML file or filename
- **parser** – ignored

**restore** ()

Raise an IOError to protect the original template source.

**class** `virttest.xml_utils.TemplateXMLTreeBuilder` (\*\**mapping*)

Bases: *virttest.element\_tree.XMLTreeBuilder*, *virttest.xml\_utils.Sub*

Resolve XML templates into temporary file-backed ElementTrees

Initialize parser that substitutes keys with values in data

**Parameters** **mapping** – values to be substituted for \${key} in XML input

**BuilderClass**

alias of *virttest.element\_tree.TreeBuilder*

**feed** (*data*)

**class** `virttest.xml_utils.XMLBackup` (*sourcefilename*)

Bases: *virttest.xml\_utils.TempXMLFile*

Backup file copy of XML data, automatically removed on instance destruction.

Initialize a temporary backup from sourcefilename.

**backup** ()

Overwrite temporary backup with contents of original source.

**restore** ()

Overwrite original source with contents of temporary backup

**sourcefilename = None**

**class** `virttest.xml_utils.XMLTreeFile` (*xml*)

Bases: *virttest.element\_tree.ElementTree*, *virttest.xml\_utils.XMLBackup*

Combination of ElementTree root and auto-cleaned XML backup file.

Initialize from a string or filename containing XML source.

param: xml: A filename or string containing XML

**backup** ()

Overwrite original source from current tree

**backup\_copy** ()

Return a copy of instance, including copies of files

**create\_by\_xpath** (*xpath*)

Creates all elements in simplistic xpath from root if not exist

**get\_element\_string** (*xpath*, *index=0*)

Returns the string for the element on xpath.

**get\_parent** (*element*, *relative\_root=None*)

Return the parent node of an element or None

param: element: Element to retrieve parent of param: relative\_root: Search only below this element

**get\_parent\_map** (*element=None*)

Return a child to parent mapping dictionary

param: element: Search only below this element

**get\_xpath** (*element*)

Return the XPath string formed from first-match tag names

**read** (*xml*)

Read file content at most size bytes, returned as a string.

**remove** (*element*)

Removes a matching subelement.

**Parameters** **element** – element to be removed.

**remove\_by\_xpath** (*xpath*, *remove\_all=False*)

Remove an element found by xpath

**Parameters** **xpath** – element name or path to remove

**reroot** (*xpath*)

Return a copy of instance, re-rooted onto xpath

**restore** ()

Overwrite and reparse current tree from original source

**sourcebackupfile** = None

**write** (*filename=None*, *encoding='UTF-8'*)

Write current XML tree to filename, or self.name if None.

## virttest.yumrepo module

This module implements classes that allow a user to create, enable and disable YUM repositories on the system.

**class** `virttest.yumrepo.YumRepo` (*name*, *baseurl*, *path=None*)

Bases: `object`

Represents a YUM repository

The goal of this class is not to give access to all features of a YUM Repository, but to provide a simple way to configure a valid one during a test run.

### Sample usage:

```
>>> mainrepo = YumRepo("main", "http://download.project.org/repo",
                        "/etc/yum.repos.d/main.repo")
```

### Or to use a default path:

```
>>> mainrepo = YumRepo("main", 'http://download.project.org/repo')
```

### And then:

```
>>> mainrepo.save()
```

When it comes to the repo URL, currently there's no support for setting a mirrorlist, only a baseurl.

Initializes a new YumRepo object

If path is not given, it is assumed to be “\$(name)s.repo” at the default YUM repo directory.

### Parameters

- **name** – the repository name
- **path** – the full path of the file that defines this repository

### **remove** ()

Removes the repo file

### **render** ()

Renders the repo file

Yes, we could use ConfigParser for this, but it produces files with spaces between keys and values, which look awkward by YUM defaults.

### **save** ()

Saves the repo file

## Module contents

---

## Cartesian Config Reference

---

### 8.1 Cartesian Config

Reference documentation of the cartesian config format.

Contents:

#### 8.1.1 Parameters

The test configuration file is used for controlling the framework by specifying parameters for each test. The parser produces a list of dictionaries (see an explanation of the file format?), each of which specifies the parameters for a single test. Each parameter is used (read) by the test dispatching system, by the pre-processor, by the post-processor, or by the test itself.

Some parameters are required and others are optional.

Most parameters should be specified in the test configuration file by the user. Few parameters are produced automatically by the configuration file parser, so when using the parser, these must not be specified by the user. Recent kvm-autotest support passing some basic parameters through the command line?.

All parameters are strings, except `depend?`, which is a list of strings. `depend?` is automatically generated by the parser, so the user probably should not be concerned with it.

You may also want to check the complete *reference documentation* on parameters.

#### Addressing objects (VMs, images, NICs etc)

Before listing the parameters, it is important to clarify how objects like VMs should be addressed in the test parameters.

For the following example we shall assume that our system accepts a parameter `vms?` which lists the VM objects to be used in the current test. Typical usage of the parameter would be:

```
vms = vm1 second_vm another_vm
```

This would indicate that our test requires 3 VMs. Let us now assume that a VM object accepts a parameter `mem` which specifies the amount of memory to give the VM. In order to specify `mem` for **vm1**, we may write:

```
mem_vm1 = 512
```

and in order to specify it for **second\_vm** we may write:

```
mem_second_vm = 1024
```

If we wanted to specify `mem` for all existing VM objects, we would write:

```
mem = 128
```

However, this would only apply to **another\_vm**, because the previous statements, which each specify `mem` for a single VM, override the statement that specifies `mem` for all VMs. The order in which these statements are written in a configuration file is not important; statements addressing a single object always override statements addressing all objects.

Let us now further assume that a VM object accepts a parameter `images`, which lists the disk image objects to be used by the VM. Typical usage of `images`, with regard to **vm1**, would be:

```
images_vm1 = first_image image2 a_third_image yet_another_image
```

We shall also assume that an image object accepts two parameters: `image_name`, which specifies the filename of the disk image, and `image_size`, which specifies the size of the image (e.g. 10G). In order to specify these with regard to **first\_image**, which is the first image of **vm1**, we may write:

```
image_name_first_image_vm1 = fc8-32-no-acpi  
image_size_first_image_vm1 = 20G
```

Note the order in which the objects are addressed: first the parameter, then the image, then the VM. In order to specify these parameters for all images of **vm1**, we may write:

```
image_name_vm1 = fc8-32  
image_size_vm1 = 10G
```

However, these statements would not apply to **first\_image** of **vm1**, because the previous statements, which addressed this image specifically, override the statements that address all objects. If we chose to specify these parameters for all images of all VMs, we would write:

```
image_name = fc8-32-something  
image_size = 5G
```

However, these would not apply to the images of **vm1**, because previous statements apply specifically to those images.

### Parameters used by the test dispatching system

The test dispatching system consists of the control file and the framework's main python module (currently named `kvm_runtest_2.py`). This system executes the proper test according to the supplied parameters.

Parameter	Effect/meaning	Required?
type?	Specifies the type of test to run (e.g. boot, migration etc)	yes
skip?	If equals 'yes', the test will not be executed	no
name?	The full <b>name</b> (not type) of the test (e.g. qcow2.ide.Fedora.8.32.install); see test configuration file format?. <b>This parameter is generated by the parser.</b>	yes
short-name?	The short <b>name</b> of the test (e.g. Fedora.8.32.install); see test configuration file format?. <b>This parameter is generated by the parser.</b> It specifies the tag to append to the Autotest test name, so that eventually the test name becomes something like kvm_runttest_2.Fedora.8.32.install.	yes
dependencies?	The full names of the dependencies of this test (e.g. ['qcow2.openSUSE-11.install', 'openSUSE-11.boot']). <b>This parameter is a list of strings, not a string, and is generated by the parser.</b> The test dispatcher will not run a test if one or more of its dependencies have run and failed.	yes

### Parameters used by the preprocessor

The preprocessor runs before the test itself. It prepares VMs and images for the test, according to the supplied parameters.

Parameter	Effect/meaning	Required?
vms?	Lists the VM objects to be used in the test. Listed VMs that do not exist will be created. <b>Existing VMs that are not listed will be destroyed and removed.</b>	yes

### VM preprocessor parameters

These parameters should be specified for each VM as explained above in [addressing objects](#).

Parameter	Effect/meaning	Required?
start_vm?	If equals 'yes', the VM will be started <b>if it is down</b> ; this parameter should be set to 'yes', for a certain VM object, in all tests that require the VM to be up.	no
restart_vm?	If equals 'yes', the VM will be (re)started, regardless of whether it's already up or not	no
start_vm_for_migration?	If equals 'yes', the VM will be (re)started with the -incoming option so that it accepts incoming migrations; this parameter should be set to 'yes' for the destination VM object in a migration test.	no

The following parameters are remembered by a VM object when it is created or started. They cannot be changed while a VM is up. In order to change them, the VM must be restarted with new parameters.

Parameter	Effect/meaning	Required (when creating or starting a VM)
<code>cdrom?</code>	Specifies the name of an image file to be passed to QEMU with the <code>-cdrom</code> option. This is typically an ISO image file.	no
<code>md5sum</code>	If specified, the VM will not be started (and thus the test will fail) if the MD5 sum of the <code>cdrom</code> image doesn't match this parameter. This is intended to verify the identity of the image used.	no
<code>md5sum1MB</code>	Similar to <code>md5sum</code> , but specifies the MD5 sum of only the first MB of the <code>cdrom</code> image. If specified, this parameter is used instead of <code>md5sum</code> . Calculating the MD5 sum of the first MB of an image is much quicker than calculating it for the entire image.	no
<code>mem</code>	Specifies the amount of memory, in MB, the VM should have	yes
<code>display</code>	Selects the rendering method to be used by the VM; valid values are 'vnc', 'sdl' and 'nographic'. If 'vnc' is selected, the VM will be assigned an available VNC port automatically.	no
<code>extra_params?</code>	Specifies a string to append to the QEMU command line, e.g. '-snapshot'	no
<code>use_telnet?</code>	If equals 'yes', communication with the guest will be done via Telnet; otherwise SSH will be used.	no
<code>ssh_port</code>	Specifies the guest's SSH/Telnet port; should normally be 22, unless Telnet is used, in which case this parameter should be 23.	if the VM should support SSH/Telnet communication
<code>ssh_prompt</code>	Regular expression describing the guest's shell prompt	if the VM should support SSH/Telnet communication
<code>username?</code>	Specifies the username with which to attempt to log into the guest whenever necessary	if the VM should support SSH/Telnet communication
<code>password?</code>	Specifies the password with which to attempt to log into the guest whenever necessary	if the VM should support SSH/Telnet communication
<code>cmd_shutdown</code>	Specifies the shell command to be used to shut the guest down (via SSH/Telnet) whenever necessary	if the VM should support being shutdown via SSH/Telnet
<code>cmd_reboot</code>	Specifies the shell command to be used to reboot the guest (via SSH/Telnet) whenever necessary	if the VM should support rebooting via SSH/Telnet
<code>images</code>	Lists the image objects to be used by the VM	yes
<code>nics</code>	Lists the NIC objects to be used by the VM	yes

A VM will be restarted automatically if a parameter change leads to a different QEMU command line (for example, when `mem` changes). However, when other parameters change (such as `cmd_shutdown`) the VM will not be automatically restarted (unless `restart_vm` is set to 'yes'), and the change will have no effect.

## Image preprocessor parameters

The following parameters should be specified for each image of each VM, as explained in [addressing objects](#).

Parameter	Effect/meaning	Required?
create_image	If equals 'yes', the image file will be created using qemu-img <b>if it doesn't already exist</b>	no
force_create_image	If equals 'yes', the image file will be created using qemu-img regardless of whether it already exists. If the file already exists it will be overwritten by a blank image file.	no
image_name	Specifies the image filename <b>without the extension</b>	yes
image_format	Specifies the format of the image to be created/used, e.g. qcow2, raw, vmdk etc	yes
image_size	Specifies the size of the image to be created, in a format understood by qemu-img (e.g. 10G)	only when creating an image
drive_format	Specifies a string to pass to QEMU as the drive's 'if' parameter (e.g. ide, scsi)	no
image_snapshot	If equals 'yes', 'snapshot=on' will be appended to the 'drive' option passed to QEMU	no
image_boot?	If equals 'yes', 'boot=on' will be appended to the 'drive' option passed to QEMU	no

## NIC preprocessor parameters

The following parameters should be specified for each NIC of each VM, as explained in the section “addressing objects”.

Parameter	Effect/meaning	Required?
nic_model?	A string to pass to QEMU as the NIC's 'model' parameter (e.g. e1000, virtio)	no

## Parameters used by the postprocessor

The postprocessor runs after the test itself. It can shut down VMs, remove image files and clean up the test's results dir.

The suffix **\_on\_error** may be added to all parameters in this section (including VM and image parameters) to define special behavior for tests that fail or result in an error. The suffix should be added **after** all object addressing suffixes. If a parameter is specified without the suffix, it applies both when the test passes and when it fails. If a parameter is specified with the suffix, it applies only when the test fails, and overrides the parameter without the suffix.

For example, if we wanted the postprocessor to shut down **vm1** after the test, but only if the test failed, we'd write:

```
kill_vm_vm1_on_error = yes
```

If we wanted to shut down **another\_vm** only if the test **passed**, we'd write:

```
kill_vm_another_vm = yes
kill_vm_another_vm_on_error = no
```

Since PPM files are normally used for debugging test failures, it would be very reasonable to choose to keep them only if the test fails. In that case we'd write:

```
keep_ppm_files = no
keep_ppm_files_on_error = yes
```

The following parameters define the postprocessor’s behavior:

Parameter	Effect/meaning	Re-quired?
vms?	Lists the VM objects to be handled by the postprocessor	yes
keep_ppm_files	If equals ‘yes’, the PPM image files in the test’s debug directory will not be removed	no

### VM postprocessor parameters

These parameters should be specified for each VM as explained above in “addressing objects”.

Parameter	Effect/meaning	Re-quired?
kill_vm	If equals ‘yes’, the VM will be shut down after the test	no
kill_vm_if_ssh	If equals ‘yes’, and <b>kill_vm</b> equals ‘yes’, the first attempt to kill the VM will be done via SSH/Telnet with a clean shutdown command (rather than a quick ‘quit’ monitor command)	no
kill_vm_timeout	If <b>kill_vm</b> equals ‘yes’, this parameter specifies the time duration (in seconds) to wait for the VM to shut itself down, before attempting to shut it down externally; if this parameter isn’t specified the VM killing procedure will start immediately following the test. This parameter is useful for tests that instruct a VM to shut down internally and need the postprocessor to shut it down only if it fails to shut itself down in a given amount of time	no
images	Lists the images objects, for this VM, to be handled by the postprocessor	no

### Image postprocessor parameters

These parameters should be specified for each image of each VM as explained above in “addressing objects”.

Parameter	Effect/meaning	Required?
remove_image	If equals ‘yes’, the image file will be removed after the test	no

### Test parameters

Any number of additional parameters may be specified for each test, and they will be available for the test to use. See the tests? page for a list of tests and the parameters they use.

### Real world example

The following example dictionary is taken from a dictionary list used in actual tests. The list was generated by the config file parser.

```

Dictionary #363:
  cmd_reboot = shutdown -r now
  cmd_shutdown = shutdown -h now
  depend = ['custom.qcow2.ide.default.up.Linux.Fedora.9.32.e1000.install',
            'custom.qcow2.ide.default.up.Linux.Fedora.9.32.e1000.setup',
            'custom.qcow2.ide.default.up.Linux.Fedora.9.32.default_nic.install',
            'custom.qcow2.ide.default.up.Linux.Fedora.9.32.default_nic.setup']
  drive_format = ide
  image_boot = yes
  image_format = qcow2
  image_name = fc9-32
  image_size = 10G
  images = image1
  keep_ppm_files = no
  keep_ppm_files_on_error = yes
  kill_vm = no
  kill_vm_gracefully = yes
  kill_vm_on_error = yes
  main_vm = vm1
  mem = 512
  migration_dst = dst
  migration_src = vm1
  migration_test_command = help
  name = custom.qcow2.ide.default.up.Linux.Fedora.9.32.e1000.migrate.1
  nic_model = e1000
  nics = nic1
  password = 123456
  shortname = Fedora.9.32.e1000.migrate.1
  ssh_port = 22
  ssh_prompt = \[root@.{0,50}][\#\$\]
  start_vm = yes
  start_vm_for_migration_dst = yes
  type = migration
  username = root
  vms = vm1 dst

```

## The test dispatching system

This test's **name** is a rather long string that indicates all the variants this test belongs to; its **shortname**, however, is much shorter: **Fedora.9.32.e1000.migrate.1**.

The test depends on 4 other tests, as indicated by the `depend?` parameter. The listed strings are the **names** of these tests. If any of these 4 tests runs and fails, the current test will be skipped.

## Preprocessing

This test requires two VMs as indicated by the `vms?` parameter: one will be called **vm1** and the other **dst**. The parameter **start\_vm**, which lacks a VM suffix and therefore applies to both VMs, indicates that if any of these VM objects does not exist or is not up, it will be started. However, **start\_vm\_for\_migration\_dst = yes** indicates that the VM **dst** should be started with the `-incoming` option so that it accepts an incoming migration.

The `images` parameter indicates that a single image object will be used by each VM, and they will both be called **image1**. This poses no problem because an image object only exists within the scope of its owner VM. However, both image objects actually point to the same image file, as indicated by **image\_name = fc9-32**. If `image_name` appeared with some suffix (e.g. **image\_name\_image1\_vm1** or **image\_name\_vm1**) it would be attributed to a single VM, not

both. **image\_format = qcow2** indicates that this is a qcow2 image file, so the actual filename becomes fc9-32.qcow2. **image\_boot = yes** instructs the preprocessor to add `'boot=on'` to the `-drive` option in the QEMU command line. **drive\_format = ide** adds `',if=ide'`. No image file is created during the preprocessing phase of this test because both **create\_image** and **force\_create\_image** are not specified.

The **nics** parameter indicates that each VM should be equipped with a single NIC object named **nic1**. **nic\_model = e1000** indicates that all NICs (due to the lack of a suffix) should be of the e1000 model. If one wished to specify a different NIC model for each VM, one could specify, for example, **nic\_model\_vm1 = e1000** and **nic\_model\_dst = rtl8139**.

The parameters `mem`, `ssh_port?`, `ssh_prompt?`, `username?`, `password?`, `cmd_reboot?` and `cmd_shutdown?` apply to both VMs. See [#VM preprocessor parameters](#) for an explanation of these parameters.

### The test itself

The parameters `migration_src?`, `migration_dst?` and `migration_test_command?` are used by the migration test. They instruct it to migrate from **vm1** to **dst** and use the shell command **help** to test that the VM is alive following the migration.

The parameter **main\_vm** happens to be specified because the format of the configuration file makes it easy to set a parameter for a large group of tests. However, in the case of a migration test, this parameter is not used and its presence is harmless.

### Postprocessing

`keep_ppm_files = no` and `keep_ppm_files_on_error = yes?` indicate that normally the PPM files (images left in the test's `'debug'` directory) will not be kept; however, if the test fails, they will. This makes sense because the PPM files take quite a lot of hard drive space, and they are mostly useful to debug failures.

`kill_vm = no` indicates that normally both VMs should be left alone following the test.

`kill_vm_on_error = yes?` indicates that in the case of a failure, both VMs should be destroyed. This makes sense because if a migration test fails, the VMs involved may not be functional for the next test, thus causing it to fail.

If they are killed by the postprocessor, the preprocessor of the next test will automatically start them, assuming `start_vm = yes?` is specified for the next test. The parameter `kill_vm_gracefully` indicates that if a VM is to be killed, it should first be attempted via SSH/Telnet with a shutdown shell command, specified by the `cmd_shutdown?` parameter.

## 8.1.2 Cartesian Config Reference

### bridge

#### Description

Sets the name of the bridge to which a VM nic will be added to. This only applies to scenarios where `'nic_mode'` is set to `'tap'`.

It can be set as a default to all nics:

```
bridge = virbr0
```

Or to a specific nic, by prefixing the parameter key with the nic name, that is for attaching `'nic1'` to bridge `'virbr1'`:

```
bridge_nic1 = virbr1
```

### Defined On

- `shared/cfg/guest-hw.cfg`
- `shared/cfg/machines.cfg`

### Used By

- `virttest/qemu_vm.py`

### Referenced By

No other documentation currently references this configuration key.

## cdroms

### Description

Sets the list of cdrom devices that a VM will have.

Usually a VM will start with a single cdrom, named 'cd1'.

```
cdroms = cd1
```

But a VM can have other cdroms such as 'unattended' for unattended installs:

```
variants:
  - @Linux:
      unattended_install:
          cdroms += " unattended"
```

And 'winutils' for Microsoft Windows VMs:

```
variants:
  - @Windows:
      unattended_install.cdrom, whql.support_vm_install:
          cdroms += " winutils"
```

### Defined On

- `shared/cfg/base.cfg`
- `shared/cfg/virtio-win.cfg`

### Used By

- `virttest/qemu_vm.py`

### Referenced By

No other documentation currently references this configuration key.

### cd\_format

#### Description

Sets the format for a given cdrom drive. This directive exists to do some special magic for cd drive formats 'ahci' and 'usb2' (see [virttest/qemu\\_vm.py](#) for more information).

Currently used options in Avocado-VT are: ahci and usb2.

Example:

```
variants:
  - usb.cdrom:
      cd_format = usb2
```

#### Defined On

- [shared/cfg/virtio-win.cfg](#)
- [shared/cfg/guest-hw.cfg](#)

#### Used By

- [virttest/qemu\\_vm.py](#)

### Referenced By

No other documentation currently references this configuration key.

### See also

- [drive\\_format](#)

### check\_image

#### Description

Configures if we want to run a check on the image files during post processing. A check usually means running 'qemu-img info' and 'qemu-img check'.

This is currently only enabled when [image\\_format](#) is set to 'qcow2'.

```
variants:
  - @qcow2:
      image_format = qcow2
      check_image = yes
```

### Defined On

- `shared/cfg/guest-hw.cfg`

### Used By

- `virttest/env_process.py`

### Referenced By

No other documentation currently references this configuration key.

### See Also

- `images`
- `image_name`
- `image_format`
- `create_image`
- `remove_image`

## convert\_ppm\_files\_to\_png

### Description

Configures whether files generated from screenshots in `PPM format` should be automatically converted to `PNG files`.

```
convert_ppm_files_to_png = yes
```

Usually we're only interested in spending time converting files for easier viewing on situations with failures:

```
convert_ppm_files_to_png_on_error = yes
```

### Defined On

The stock configuration key (without suffix) is not currently defined on any sample cartesian configuration file.

The configuration key with the 'on\_error' suffix is defined on:

- `shared/cfg/base.cfg`

### Used By

- `virttest/env_process.py`

### Referenced By

No other documentation currently references this configuration key.

### create\_image

#### Description

Configures if we want to create an image file during pre processing, if it does **not** already exists. To force the creation of the image file even if it already exists, use `force_create_image`.

To create an image file if it does **not** already exists:

```
create_image = yes
```

#### Defined On

- `shared/cfg/guest-hw.cfg`

#### Used By

- `virttest/env_process.py`

### Referenced By

No other documentation currently references this configuration key.

### See Also

- `images`
- `image_name`
- `image_format`
- `create_image`
- `force_create_image`
- `remove_image`

### display

#### Description

Sets the VM display type. Of course, only one display type is allowed, and current valid options are: `vnc`, `sdl`, `spice` and `nographic`.

```
display = vnc
```

For VNC displays, the port number is dynamically allocated within the 5900 - 6100 range.

```
display = sdl
```

An SDL display does not use a port, but simply behaves as an X client. If you want to send the SDL display to a different X Server, see [x11\\_display?](#)

```
display = spice
```

For spice displays, the port number is dynamically allocated within the 8000 - 8100 range.

```
display = nographic
```

nographic for qemu/kvm means that the VM will have no graphical display and that serial I/Os will be redirected to console.

### Defined On

- [shared/cfg/base.cfg](#)

### Used By

- [virttest/qemu\\_vm.py](#)

### Referenced By

No other documentation currently references this configuration key.

## drive\_cache

### Description

Sets the caching mode a given drive. Currently the valid values are: writethrough, writeback, none and unsafe.

Example:

```
drive_cache = writeback
```

This option can also be set specifically to a drive:

```
drive_cache_cdl = none
```

### Defined On

- [shared/cfg/base.cfg](#)

### Used By

- [virttest/qemu\\_vm.py](#)

## Referenced By

No other documentation currently references this configuration key.

## drive\_format

### Description

Sets the format for a given drive.

Usually this passed directly to qemu 'if' sub-option of '-drive' command line option. But in some special cases, such as when drive\_format is set to 'ahci' or 'usb2', some special magic happens (see [client/virt/kvm\\_vm.py](#) for more information).

Currently available options in qemu include: ide, scsi, sd, mtd, floppy, pflash, virtio.

Currently used options in Avocado-VT are: ide, scsi, virtio, ahci, usb2.

Example:

```
drive_format = ide
```

### Defined On

- [shared/cfg/guest-hw.cfg](#)

### Used By

- [virttest/qemu\\_vm.py](#)

## Referenced By

No other documentation currently references this configuration key.

## drive\_index

### Description

Sets the index, that is, ordering precedence of a given drive. Valid values are integers starting with 0.

Example:

```
drive_index_image1 = 0
drive_index_cd1 = 1
```

This will make the drive that has 'image1' appear before the drive that has 'cd1'.

### Defined On

- `client/tests/kvm/base.cfg.sample`
- `client/tests/kvm/guest-os.cfg.sample`
- `client/tests/kvm/subtests.cfg.sample`
- `client/tests/kvm/virtio-win.cfg.sample`

### Used By

- `client/virt/kvm_vm.py`

### Referenced By

No other documentation currently references this configuration key.

### drive\_werror

#### Description

Sets the behavior for the VM when a drive encounters a read or write error. This is passed to QEMU 'werror' sub-option of the '-drive' command line option.

Valid for QEMU are: ignore, stop, report, enospc.

Example:

```
drive_werror = stop
```

### Defined On

- `client/tests/kvm/subtests.cfg.sample`

### Used By

- `client/virt/kvm_vm.py`

### Referenced By

No other documentation currently references this configuration key.

### drive\_serial

#### Description

Sets the serial number to assign to the drive device.

### Defined On

This configuration key is not currently defined on any sample cartesian configuration file.

### Used By

- `client/virt/kvm_vm.py`

### Referenced By

No other documentation currently references this configuration key.

### file\_transfer\_client

#### Description

Sets the kind of application, thus protocol, that will be spoken when transferring files to and from the guest.

Avocado-VT currently allows for two options: 'scp' or 'rss'.

For Linux VMs, we default to SSH:

```
variants:
  - @Linux:
      file_transfer_client = scp
```

And for Microsoft Windows VMs we default to rss:

```
variants:
  - @Windows:
      file_transfer_client = rss
```

### Defined On

- `client/tests/kvm/guest-os.cfg.sample`

### Used By

- `client/virt/kvm_vm.py`

### Referenced By

No other documentation currently references this configuration key.

## See Also

- [redirs](#)
- [file\\_transfer\\_port](#)
- [guest\\_port\\_file\\_transfer](#)

## file\_transfer\_port

### Description

Sets the port on which the application used to transfer files to and from the guest will be listening on.

When `file_transfer_client` is `scp`, this is by default 22:

```
variants:
  - @Linux:
      file_transfer_client = scp
      file_transfer_port = 22
```

And for `rsync`, the default is port 10023:

```
variants:
  - @Windows:
      file_transfer_client = rsync
      file_transfer_port = 10023:
```

### Defined On

- [client/tests/kvm/guest-os.cfg.sample](#)

### Used By

- [client/virt/kvm\\_vm.py](#)

### Referenced By

No other documentation currently references this configuration key.

## See Also

- [redirs](#)
- [file\\_transfer\\_client](#)
- [guest\\_port\\_file\\_transfer](#)

## force\_create\_image

### Description

Configures if we want to create an image file during pre processing, **even if it already exists**. To create an image file only if it **does not** exist, use `create_image` instead.

To create an image file **even if it already exists**:

```
force_create_image = yes
```

### Defined On

- `client/tests/kvm/subtests.cfg.sample`

### Used By

- `client/virt/virt_env_process.py`

### Referenced By

No other documentation currently references this configuration key.

### See Also

- `images`
- `image_name`
- `image_format`
- `create_image`
- `check_image`
- `remove_image`

## guest\_port

### Description

`guest_port` is not a configuration item itself, but the basis (prefix) of other real configuration items such as:

- `guest_port_remote_shell`
- `guest_port_file_transfer`
- `guest_port_unattended_install`

## Defined On

Variations of `guest_port` are defined on the following files:

- `client/tests/kvm/base.cfg.sample`
- `client/tests/kvm/guest-os.cfg.sample`
- `client/tests/kvm/subtests.cfg.sample`

## Referenced By

No other documentation currently references this configuration key.

## See also

- `redirs`

## guest\_port\_remote\_shell

### Description

Sets the port of the remote shell server that runs inside guests. On Linux VMs, this is set by default to the standard SSH port (22), and for Windows guests, set by default to port 10022.

This is a specialization of the `guest_port` configuration entry.

Example, default entry:

```
guest_port_remote_shell = 22
```

Overridden on Windows variants:

```
variants:  
  - @Windows:  
    guest_port_remote_shell = 10022
```

## Defined On

- `client/tests/kvm/base.cfg.sample`
- `client/tests/kvm/guest-os.cfg.sample`

## Used By

- `client/virt/kvm_vm.py`
- `client/virt/virt_utils.py`

## Referenced By

No other documentation currently references this configuration key.

## See Also

- [redirs](#)
- [shell\\_port?](#)

## guest\_port\_file\_tranfer

### Description

Sets the port of the server application running inside guests that will be used for transferring files to and from this guest.

On Linux VMs, the `file_transfer_client` is set by default to 'scp', and this the port is set by default to the standard SSH port (22).

For Windows guests, the `file_transfer_client` is set by default to 'rss', and the port is set by default to 10023.

This is a specialization of the `guest_port` configuration entry.

Example, default entry:

```
guest_port_file_transfer = 22
```

Overridden on Windows variants:

```
variants:  
  - @Windows:  
    guest_port_file_transfer = 10023
```

### Defined On

- [client/tests/kvm/guest-os.cfg.sample](#)

### Used By

- [client/virt/kvm\\_vm.py](#)
- [client/virt/virt\\_utils.py](#)

### Referenced By

No other documentation currently references this configuration key.

## See Also

- [redirs](#)
- [file\\_transfer\\_port](#)
- [file\\_transfer\\_client](#)

## guest\_port\_unattended\_install

### Description

Sets the port of the helper application/script running inside guests that will be used for flagging the end of the unattended install.

Both on Linux and Windows VMs, the default value is 12323:

```
guest_port_unattended_install = 12323
```

This must match with the port number on unattended install files. On Linux VMs, this is hardcoded on kickstart files ‘%post’ section:

```
%post --interpreter /usr/bin/python
...
server = socket.socket(socket.AF_INET, socket.SOCK_STREAM)
server.bind(('', 12323))
server.listen(1)
(client, addr) = server.accept()
client.send("done")
client.close()
```

This is a specialization of the `guest_port` configuration entry.

### Defined On

- `client/tests/kvm/subtests.cfg.sample`

### Used By

- `client/tests/kvm/tests/unattended_install.py`

### Referenced By

No other documentation currently references this configuration key.

### See Also

- `redirs`

## images

### Description

Sets the list of disk devices (backed by a image file or device) that a VM will have.

Usually a VM will start with a single image, named `image1`:

```
images = image1
```

But a VM can have other images. One example is when we test the maximum number of disk devices supported on a VM:

```
# Tests
variants:
  - multi_disk: install setup image_copy unattended_install.cdrom
    variants:
      - max_disk:
          images += " stg stg2 stg3 stg4 stg5 stg6 stg7 stg8 stg9 stg10 stg11_
↪stg12 stg13 stg14 stg15 stg16 stg17 stg18 stg19 stg20 stg21 stg22 stg23"
```

### Defined On

- `client/tests/kvm/base.cfg.sample`
- `client/tests/kvm/guest-os.cfg.sample`
- `client/tests/kvm/subtests.cfg.sample`

### Used By

- `client/virt/kvm_vm.py`
- `virt_env_process.py`
- `client/tests/kvm/tests/enospc.py`
- `client/tests/kvm/tests/image_copy.py`

### Referenced By

No other documentation currently references this configuration key.

### images\_good

#### Description

Sets the URI of a NFS server that hosts “good” (think “golden”) images, that will be copied to the local system prior to running other tests.

The act of copying of “good” images is an alternative to installing a VM from scratch before running other tests.

The default value is actually an invalid value that must be changed if you intend to use this feature:

```
images_good = 0.0.0.0:/autotest/images_good
```

### Defined On

- `client/tests/kvm/base.cfg.sample`

## Used By

- `client/virt/tests/image_copy.py`

## Referenced By

No other documentation currently references this configuration key.

## image\_format

### Description

Sets the format of the backing image file for a given drive.

The value of this configuration key is usually passed verbatim to image creation commands. It's worth noticing that QEMU has support for many formats, while Avocado-VT currently plays really well only with **qcow2** and **raw**.

You can also use **vmdk**, but it's considered 'not supported', at least on image conversion tests.

To set the default image format:

```
image_format = qcow2
```

To set the image format for another image:

```
# Tests
variants:
  - block_hotplug: install setup image_copy unattended_install.cdrom
    images += " stg"
    image_format_stg = raw
```

### Defined On

- `client/tests/kvm/base.cfg.sample`
- `client/tests/kvm/subtests.cfg.sample`

## Used By

- `client/virt/virt_vm.py`
- `client/tests/kvm/tests/qemu_img.py`

## Referenced By

No other documentation currently references this configuration key.

## See Also

- [images](#)
- [image\\_name](#)
- [image\\_size](#)

## image\_name

### Description

Sets the name of an image file.

If the image file is not a block device (see [image\\_raw\\_device](#)) the actual file created will be named accordingly (together with the extension, according to [image\\_format](#)).

When this configuration key is used without a suffix, it's setting the name of all images without a specific name. The net effect is that it sets the name of the 'default' image. Example:

```
# Guests
variants:
  - @Linux:
      variants:
        - Fedora:
            variants:
              - 15.64:
                  image_name = f15-64
```

This example means that when a Fedora 15 64 bits is installed, and has a backing image file created, it's going to be named starting with 'f15-64'. If the [image\\_format](#) specified is 'qcow2', then the complete filename will be 'f15-64.qcow2'.

When this configuration key is used with a suffix, it sets the name of a specific image. Example:

```
# Tests
variants:
  - block_hotplug: install setup image_copy unattended_install.cdrom
      images += " stg"
      image_name_stg = storage
```

### Defined On

- [client/tests/kvm/guest-os.cfg.sample](#)
- [client/tests/kvm/subtests.cfg.sample](#)
- [client/tests/kvm/tests.cfg.sample](#)

### Used By

- [client/virt/kvm\\_vm.py](#)
- [client/tests/kvm/tests/qemu\\_img.py](#)

## Referenced By

- [How to run virt-test tests on an existing guest image?](#)

## See Also

- [images](#)
- [image\\_format](#)
- [image\\_raw\\_device](#)

## image\_raw\_device

### Description

Flags whether the backing image for a given drive is a block device instead of a regular file.

By default we assume all images are backed by files:

```
image_raw_device = no
```

But suppose you define a new variant, for another guest, that will have a disk backed by a block device (say, an LVM volume):

```
CustomGuestLinux:  
    image_name = /dev/vg/linux_guest  
    image_raw_device = yes
```

### Defined On

- [client/tests/kvm/base.cfg.sample](#)
- [client/tests/kvm/tests.cfg.sample](#)

### Used By

- [client/virt/kvm\\_vm.py](#)

## Referenced By

- [How to run virt-test tests on an existing guest image?](#)

## image\_size

### Description

Sets the size of image files. This applies to images creation and also validation tests (when checking that a image was properly created according to what was requested).

By default the image size is set to 10G:

```
image_size = 10G
```

But a VM can have other drives, backed by other image files (or block devices), with different sizes:

```
# Tests
variants:
  - block_hotplug: install setup image_copy unattended_install.cdrom
    images += " stg"
    boot_drive_stg = no
    image_name_stg = storage
    image_size_stg = 1G
```

### Defined On

- `client/tests/kvm/base.cfg.sample`
- `client/tests/kvm/guest-os.cfg.sample`
- `client/tests/kvm/subtests.cfg.sample`
- `client/tests/kvm/tests.cfg.sample`

### Used By

- `client/virt/kvm_vm.py`
- `client/tests/kvm/tests/qemu_img.py`

### Referenced By

No other documentation currently references this configuration key.

### See Also

- `images`
- `image_name`
- `image_format`

### keep\_ppm\_files

#### Description

Configures whether should we keep the original screedump files in `PPM` format when converting them to `PNG`, according to `convert_ppm_files_to_png`

To keep the PPM files:

```
keep_ppm_files = yes
```

To keep the PPM files only on situations with failures:

```
keep_ppm_files_on_error = yes
```

### Defined On

This configuration key is not currently defined on any sample cartesian configuration file, but a sample (commented out) appears on:

- `client/tests/kvm/base.cfg.sample`

### Used By

- `client/virt/virt_env_process.py`

### Referenced By

No other documentation currently references this configuration key.

## keep\_screendumps

### Description

Flags whether screendumps (screenshots of the VM console) should be kept or delete during post processing.

To keep the screendumps:

```
keep_screendumps = yes
```

Usually we're only interested in keeping screendumps on situations with failures, to ease the debugging:

```
keep_screendumps_on_error = yes
```

### Defined On

The stock configuration key (without suffix) is not currently defined on any sample cartesian configuration file.

The configuration key with the 'on\_error' suffix is defined on:

- `client/tests/kvm/base.cfg.sample`

### Used By

- `client/virt/virt_env_process.py`

### Referenced By

No other documentation currently references this configuration key.

### kill\_unresponsive\_vms

#### Description

Configures whether VMs that are running, but do not have a responsive session (for example via SSH), should be destroyed (of course, not *gracefully*) during post processing.

This behavior is enabled by default. To turn it off and leave unresponsive VMs lying around (usually **not** recommended):

```
kill_unresponsive_vms = no
```

#### Defined On

- `client/tests/kvm/base.cfg.sample`

#### Used By

- `client/virt/virt_env_process.py`

#### Referenced By

No other documentation currently references this configuration key.

#### See also

- `kill_vm`
- `kill_vm_timeout`
- `kill_vm_gracefully`

### kill\_vm

#### Description

Configures whether a VM should be shutdown during post processing. How exactly the VM will be shutdown is configured by other parameters such as `kill_vm_gracefully` and `kill_vm_timeout`.

To force shutdown during post processing:

```
kill_vm = yes
```

#### Defined On

- `client/tests/kvm/base.cfg.sample`
- `client/tests/kvm/guest-os.cfg.sample`
- `client/tests/kvm/subtests.cfg.sample`

- `client/tests/kvm/unittests.cfg.sample`

### Used By

- `client/virt/virt_env_process.py`

### Referenced By

No other documentation currently references this configuration key.

### See also

- `kill_vm_timeout`
- `kill_vm_gracefully`
- `kill_unresponsive_vms`

### kill\_vm\_gracefully

#### Description

Flags whether a graceful shutdown command should be sent to the VM guest OS before attempting to either halt the VM at the hypervisor side (sending an appropriate command to QEMU or even killing its process).

Of course, this is only valid when `kill_vm` is set to 'yes'.

To force killing VMs without using a graceful shutdown command (such as 'shutdown -h now'):

```
kill_vm_gracefully = no
```

#### Defined On

- `client/tests/kvm/base.cfg.sample`
- `client/tests/kvm/guest-os.cfg.sample`
- `client/tests/kvm/subtests.cfg.sample`
- `client/tests/kvm/unittests.cfg.sample`

### Used By

- `client/virt/virt_env_process.py`

### Referenced By

No other documentation currently references this configuration key.

### See also

- [kill\\_vm](#)
- [kill\\_vm\\_timeout](#)
- [kill\\_unresponsive\\_vms](#)

### kill\_vm\_timeout

#### Description

Configures the amount of time, in seconds, to wait for VM shutdown during the post processing.

This is only relevant if `kill_vm` is actually set to 'yes'.

To set the timeout to one minute:

```
kill_vm_timeout = 60
```

#### Defined On

- [client/tests/kvm/guest-os.cfg.sample](#)
- [client/tests/kvm/subtests.cfg.sample](#)

#### Used By

- [client/virt/virt\\_env\\_process.py](#)

#### Referenced By

No other documentation currently references this configuration key.

### See also

- [kill\\_vm](#)
- [kill\\_vm\\_gracefully](#)
- [kill\\_unresponsive\\_vms](#)

### login\_timeout

#### Description

Sets the amount of time, in seconds, to wait for a session (SSH/Telnet/Netcat) with the VM.

To set the timeout to 6 minutes:

```
login_timeout = 360
```

### Defined On

- client/tests/kvm/base.cfg.sample
- client/tests/kvm/subtests.cfg.sample

### Used By

- client/virt/tests/autotest.py
- client/virt/tests/boot.py
- client/virt/tests/clock\_getres.py
- client/virt/tests/ethtool.py
- client/virt/tests/file\_transfer.py
- client/virt/tests/fillup\_disk.py
- client/virt/tests/guest\_s4.py
- client/virt/tests/guest\_test.py
- client/virt/tests/iofuzz.py
- client/virt/tests/ioquit.py
- client/virt/tests/iozone\_windows.py
- client/virt/tests/jumbo.py
- client/virt/tests/kdump.py
- client/virt/tests/linux\_s3.py
- client/virt/tests/lvm.py
- client/virt/tests/mac\_change.py
- client/virt/tests/multicast.py
- client/virt/tests/netperf.py
- client/virt/tests/nicdriver\_unload.py
- client/virt/tests/nic\_promisc.py
- client/virt/tests/ping.py
- client/virt/tests/shutdown.py
- client/virt/tests/softlockup.py
- client/virt/tests/stress\_boot.py
- client/virt/tests/vlan.py
- client/virt/tests/watchdog.py
- client/virt/tests/whql\_client\_install.py
- client/virt/tests/whql\_submission.py

- `client/virt/tests/yum_update.py`
- `client/tests/kvm/tests/balloon_check.py`
- `client/tests/kvm/tests/cdrom.py`
- `client/tests/kvm/tests/cpu_hotplug.py`
- `client/tests/kvm/tests/enospc.py`
- `client/tests/kvm/tests/floppy.py`
- `client/tests/kvm/tests/hdparm.py`
- `client/tests/kvm/tests/migration_multi_host.py`
- `client/tests/kvm/tests/migration.py`
- `client/tests/kvm/tests/migration_with_file_transfer.py`
- `client/tests/kvm/tests/migration_with_reboot.py`
- `client/tests/kvm/tests/multi_disk.py`
- `client/tests/kvm/tests/nic_bonding.py`
- `client/tests/kvm/tests/nic_hotplug.py`
- `client/tests/kvm/tests/nmi_watchdog.py`
- `client/tests/kvm/tests/pci_hotplug.py`
- `client/tests/kvm/tests/physical_resources_check.py`
- `client/tests/kvm/tests/qemu_img.py`
- `client/tests/kvm/tests/set_link.py`
- `client/tests/kvm/tests/smbios_table.py`
- `client/tests/kvm/tests/stop_continue.py`
- `client/tests/kvm/tests/system_reset_bootable.py`
- `client/tests/kvm/tests/timedrift.py`
- `client/tests/kvm/tests/timedrift_with_migration.py`
- `client/tests/kvm/tests/timedrift_with_reboot.py`
- `client/tests/kvm/tests/timedrift_with_stop.py`
- `client/tests/kvm/tests/trans_hugepage_defrag.py`
- `client/tests/kvm/tests/trans_hugepage.py`
- `client/tests/kvm/tests/trans_hugepage_swapping.py`
- `client/tests/kvm/tests/usb.py`
- `client/tests/kvm/tests/vmstop.py`

### Referenced By

No other documentation currently references this configuration key.

## main\_monitor

### Description

Sets the default monitor for a VM, meaning that when a test accesses the **monitor** property of a **VM** class instance, that one monitor will be returned.

Usually a VM will have a single monitor, and that will be a regular Human monitor:

```
main_monitor = humanmonitor1
```

If a **main\_monitor** is not defined, the **monitor** property of a **VM** class instance will assume that the first monitor set in the `monitors` list is the main monitor.

### Defined On

- `client/tests/kvm/base.cfg.sample`
- `client/tests/kvm/unittests.cfg.sample`

### Used By

- `client/virt/kvm_vm.py`

### Referenced By

No other documentation currently references this configuration key.

### See Also

- `monitors`
- `monitor_type`
- `client/virt/kvm_monitor.py`

## main\_vm

### Description

Sets name of the main VM.

There's nothing special about this configuration item, except that most tests will also reference its value when fetching a VM from the Environment (see class **Env** on file `client/virt/virt_utils.py`).

The default name of the main VM is **vm1**:

```
main_vm = vm1
```

### Defined On

- `client/tests/kvm/base.cfg.sample`
- `client/tests/kvm/unittests.cfg.sample`

### Referenced By

No other documentation currently references this configuration key.

### mem

#### Description

Sets the amount of memory (in MB) a VM will have.

The amount of memory a VM will have for most tests is of the main VM is 1024:

```
mem = 1024
```

But for running KVM unittests, we currently set that to 512:

```
mem = 512
```

### Defined On

- `client/tests/kvm/base.cfg.sample`
- `client/tests/kvm/unittests.cfg.sample`

### Used By

- `client/virt/kvm_vm.py`

### Referenced By

No other documentation currently references this configuration key.

### migration\_mode

#### Description

If migration mode is specified, the VM will be started in incoming mode for migration. Valid modes for migration are: **tcp**, **unix** and **exec**.

To start a VM in incoming mode for receiving migration data via tcp:

```
migration_mode = tcp
```

A port will be allocated from the range 5200 to 6000.

## Defined On

This configuration item is currently not defined on a sample cartesian configuration file.

## Used By

- `client/tests/kvm/migration_control.srv`

## Referenced By

No other documentation currently references this configuration key.

## monitors

### Description

Sets the list of `monitors` that a VM currently has running. See [ QEMU has two types of monitors:

- The regular, also known as Human monitor, intended for interaction with people (but also very much used by other tools, Autotest inclusive)
- The QMP monitor, a monitor that speaks the QMP protocol.

Usually a VM will have a single monitor, and that will be a regular Human monitor:

```
monitors = humanmonitor1
main_monitor = humanmonitor1
monitor_type_humanmonitor1 = human
monitor_type = human
```

The monitor type is defined by `monitor_type`.

Here's a more detailed explanation of the configuration snippet above:

```
monitors = humanmonitor1
```

The default VM will have only one monitor, named **humanmonitor1**.

```
main_monitor = humanmonitor1
```

The main monitor will also be **humanmonitor1**. When a test has to talk to a monitor, it usually does so through the main monitor.

```
monitor_type_humanmonitor1 = human
```

This configuration sets the specific type of the **humanmonitor1** to be **human**.

```
monitor_type = human
```

And finally this configuration sets the default monitor type also to be **human**.

Suppose you define a new monitor for your VMs:

```
monitors += ' monitor2'
```

Unless you also define:

```
monitor_type_monitor2 = qmp
```

**monitor2** will also be a human monitor.

### Defined On

- `client/tests/kvm/base.cfg.sample`
- `client/tests/kvm/unittests.cfg.sample`

### Used By

- `client/tests/kvm/kvm.py`
- `client/virt/kvm_vm.py`
- `client/virt/virt_test_utils.py`

Note: most tests that interact with the monitor do so through the **monitor** property of the **VM** class, and not by evaluating this parameter value. This is usually only done by the **VM** class.

### Referenced By

No other documentation currently references this configuration key.

### See Also

- `client/virt/kvm_monitor.py`

## monitor\_type

### Description

Sets the type of the `monitor`. QEMU has two types of monitors:

- The regular, also known as Human monitor, intended for interaction with people (but also very much used by other tools, Autotest inclusive)
- The QMP monitor, a monitor that speaks the [QMP](#) protocol.

To set the default monitor type to be a [QMP](#) monitor:

```
monitor_type = qmp
```

To set the type of a specific monitor use:

```
monitor_type_humanmonitor1 = human
```

### Defined On

- `client/tests/kvm/base.cfg.sample`
- `client/tests/kvm/unittests.cfg.sample`

### Used By

- `client/virt/kvm_vm.py`

### Referenced By

No other documentation currently references this configuration key.

### See Also

- `client/virt/kvm_monitor.py`

## nic\_mode

### Description

Configures the mode of a Network Interface Card.

Suitable values for this configuration item are either **user** or **tap**.

User mode networking is the default **on QEMU**, but Tap mode is the current default in Autotest:

```
nic_mode = tap
```

When **nic\_mode** is set to Tap you should also set a **bridge**.

### Defined On

- `client/tests/kvm/base.cfg.sample`
- `client/tests/kvm/subtests.cfg.sample`
- `client/tests/kvm/migration_control.srv`

### Used By

- `client/virt/kvm_vm.py`
- `client/tests/kvm/tests/physical_resources_check.py`

### Referenced By

No other documentation currently references this configuration key.

### See Also

- [bridge](#)
- [redirs](#)

### nics

#### Description

Sets the list of network interface cards that a VM will have.

Usually a VM will start with a single nic, named `nic1`:

```
nics = nic1
```

But a VM can have other nics. Some tests (usually network related) add other nics. One obvious example is the [bonding test](#):

```
# Tests
variants:
  - nic_bonding: install setup image_copy unattended_install.cdrom
    nics += ' nic2 nic3 nic4'
```

#### Defined On

- [client/tests/kvm/base.cfg.sample](#)
- [client/tests/kvm/subtests.cfg.sample](#)

#### Used By

- [client/virt/virt\\_vm.py](#)
- [client/virt/kvm\\_vm.py](#)
- [client/tests/kvm/tests/nic\\_bonding.py](#)
- [client/tests/kvm/tests/physical\\_resources\\_check.py](#)

#### Referenced By

No other documentation currently references this configuration key.

### pre\_command

#### Description

Configures a command to be executed during pre processing.

The pre processing code will execute the given command, waiting for an amount of [time](#) and failing the test unless the command is considered [noncritical](#).

### Defined On

This configuration key is not currently defined on any sample cartesian configuration file in its stock format.

### Used By

- `client/virt/virt_env_process.py`

### Referenced By

No other documentation currently references this configuration key.

### See Also

- `pre_command_timeout`
- `pre_command_non_critical?`

## `pre_command_timeout`

### Description

Configures the amount of time to wait while executing a `command` during pre processing.

### Defined On

This configuration key is not currently defined on any sample cartesian configuration file in its stock format.

### Used By

- `client/virt/virt_env_process.py`

### Referenced By

No other documentation currently references this configuration key.

### See Also

- `pre_command`
- `pre_command_non_critical?`

## pre\_command\_noncritical

### Description

Flags if the `command` configured to be executed during pre processing, is not critical, that is, if an error during its execution should only be logged or fail the test.

### Defined On

This configuration key is not currently defined on any sample cartesian configuration file in its stock format.

### Used By

- `client/virt/virt_env_process.py`

### Referenced By

No other documentation currently references this configuration key.

### See Also

- `pre_command`
- `pre_command_timeout`

## profilers

### Description

Sets the list of Autotest profilers to be enabled during the test run (they're removed from the job's list of profilers when the test finishes).

This is commonly used to enable the `kvm_stat` profiler:

```
profilers = kvm_stat
```

### Defined On

- `client/tests/kvm/base.cfg.sample`
- `client/tests/kvm/subtests.cfg.sample`

### Used By

- `client/virt/virt_utils.py`

## Referenced By

No other documentation currently references this configuration key.

## See Also

- [Setting up profiling on virt-test](#)
- [Using and developing job profilers](#)

## post\_command

### Description

Configures a command to be executed during post processing.

The pre processing code will execute the given command, waiting for an amount of `time` and failing the test unless the command is considered `noncritical`.

### Defined On

This configuration key is not currently defined on any sample cartesian configuration file in its stock format.

### Used By

- `client/virt/virt_env_process.py`

## Referenced By

No other documentation currently references this configuration key.

## See Also

- `post_command_timeout`
- `post_command_non_critical?`

## post\_command\_timeout

### Description

Configures the amount of time to wait while executing a `command` during post processing.

### Defined On

This configuration key is not currently defined on any sample cartesian configuration file in its stock format.

### Used By

- `client/virt/virt_env_process.py`

### Referenced By

No other documentation currently references this configuration key.

### See Also

- `post_command`
- `post_command_non_critical?`

### `post_command_noncritical`

#### Description

Flags if the `command` configured to to be executed during pre processing, is not critical, that is, if an error during its execution should only be logged or fail the test.

#### Defined On

This configuration key is not currently defined on any sample cartesian configuration file in its stock format.

### Used By

- `client/virt/virt_env_process.py`

### Referenced By

No other documentation currently references this configuration key.

### See Also

- `post_command`
- `post_command_timeout`

### `qemu_binary`

#### Description

Sets either the name or full path for the QEMU binary.

By default this is as simple as possible:

```
qemu_binary = qemu
```

But while testing the qemu-kvm userspace, one could use:

```
qemu_binary = /usr/bin/qemu-kvm
```

### Defined On

- client/tests/kvm/base.cfg.sample
- client/tests/kvm/tests.cfg.sample
- client/tests/kvm/unittests.cfg.sample

### Used By

- client/virt/kvm\_vm.py
- client/virt/virt\_env\_process.py

### Referenced By

No other documentation currently references this configuration key.

### See Also

- qemu\_img\_binary

## qemu\_img\_binary

### Description

Sets either the name or full path for the **qemu-img** binary.

By default this is as simple as possible:

```
qemu_img_binary = qemu-img
```

### Defined On

- client/tests/kvm/base.cfg.sample
- client/tests/kvm/tests.cfg.sample
- client/tests/kvm/unittests.cfg.sample

### Used By

- [client/virt/virt\\_vm.py](#)
- [client/tests/kvm/tests/qemu\\_img.py](#)

### Referenced By

No other documentation currently references this configuration key.

### See Also

- [qemu\\_binary](#)

### qxl\_dev\_nr

#### Description

Sets the number of display devices available through [SPICE](#). This is only valid when [qxl](#) is set.

The default configuration enables a single display device:

```
qxl_dev_nr = 1
```

Note that due to a limitation in the current Autotest code (see [client/virt/kvm\\_vm.py](#)) this setting is only applied when the QEMU syntax is:

```
# qemu -qxl 2
```

and not applied when the syntax is:

```
# qemu -vga qxl
```

### Defined On

- [client/tests/kvm/base.cfg.sample](#)

### Used By

- [client/virt/kvm\\_vm.py](#)

### Referenced By

No other documentation currently references this configuration key.

## See Also

- [qxl](#)
- [vga?](#)
- [display](#)

## qxl

### Description

Flags if the [VGA](#) device should be an of type **qxl**.

The default configuration enables a **qxl** VGA:

```
qxl = on
```

Note that if [vga?](#) is also set, **qxl** takes precedence over it.

### Defined On

- [client/tests/kvm/base.cfg.sample](#)

### Used By

- [client/virt/kvm\\_vm.py](#)

### Referenced By

No other documentation currently references this configuration key.

## See Also

- [qxl\\_dev\\_nr](#)
- [vga?](#)

## redirs

### Description

Sets the network redirections between host and guest. These are only used and necessary when using ‘user’ mode network.

Example:

```
redirs = remote_shell
guest_port_remote_shell = 22
```

A port will be allocated on the host, usually within the range 5000-6000, and all traffic to/from this port will be redirect to guest's port 22.

### Defined On

- `shared/cfg/base.cfg`

### Used By

- `virttest/qemu_vm.py`

### Referenced By

No other documentation currently references this configuration key.

### See also

- `guest_port`
- `guest_port_remote_shell`

## remove\_image

### Description

Configures if we want to remove image files during post processing.

To keep all images after running tests:

```
remove_image = no
```

On a test with multiple transient images, to remove all but the main image (**image1**), use:

```
remove_image = yes
remove_image_image1 = no
```

### Defined On

- `shared/cfg/base.cfg`

### Used By

- `virttest/env_process.py`

### Referenced By

No other documentation currently references this configuration key.

## See Also

- [images](#)
- [image\\_name](#)
- [image\\_format](#)
- [create\\_image](#)
- [force\\_create\\_image](#)

## spice

### Description

Sets extra arguments to be passed to the QEMU **-spice** command line argument.

Note that there's no need to pass a port number, as this will be automatically allocated from the 8000 - 8100 range.

By default, the extra arguments disable authentication:

```
spice = disable-ticketing
```

### Defined On

- [client/tests/kvm/base.cfg.sample](#)

### Used By

- [client/virt/kvm\\_vm.py](#)

### Referenced By

No other documentation currently references this configuration key.

## See Also

- [qxl](#)
- [qxl\\_dev\\_nr](#)
- [vga?](#)
- [display](#)

## 8.2 Indices and tables

- [genindex](#)
- [modindex](#)
- [search](#)



### V

virttest, 136  
virttest.cartesian\_config, 99  
virttest.compat\_52lts, 109  
virttest.defaults, 109  
virttest.element\_path, 110  
virttest.element\_tree, 110  
virttest.error\_context, 111  
virttest.http\_server, 112  
virttest.logging\_manager, 112  
virttest.lvsb, 113  
virttest.lvsb\_base, 113  
virttest.ppm\_utils, 116  
virttest.propcan, 119  
virttest.qemu\_devices, 83  
virttest.qemu\_devices.utils, 83  
virttest.remote\_commander, 92  
virttest.remote\_commander.messenger, 84  
virttest.remote\_commander.remote\_interface,  
86  
virttest.remote\_commander.remote\_master,  
88  
virttest.remote\_commander.remote\_runner,  
90  
virttest.rss\_client, 121  
virttest.scan\_autotest\_results, 124  
virttest.syslog\_server, 125  
virttest.unittest\_utils, 95  
virttest.unittest\_utils.mock, 93  
virttest.utils\_config, 127  
virttest.utils\_numeric, 129  
virttest.utils\_version, 130  
virttest.utils\_windows, 99  
virttest.utils\_windows.drive, 96  
virttest.utils\_windows.system, 97  
virttest.utils\_windows.virtio\_win, 97  
virttest.utils\_windows.wmic, 98  
virttest.versionable\_class, 131  
virttest.video\_maker, 132  
virttest.xml\_utils, 132  
virttest.yumrepo, 135



## A

- add\_flag() (virttest.lvsb\_base.SandboxCommandBase method), 114
- add\_function() (virttest.remote\_commander.remote\_runner.CommanderSlaveCmd method), 91
- add\_mm() (virttest.lvsb\_base.SandboxCommandBase method), 114
- add\_optarg() (virttest.lvsb\_base.SandboxCommandBase method), 114
- add\_pos() (virttest.lvsb\_base.SandboxCommandBase method), 114
- add\_timestamp() (in module virttest.ppm\_utils), 116
- address\_string() (virttest.http\_server.HTTPRequestHandler method), 112
- align\_value() (in module virttest.utils\_numeric), 129
- and\_raises() (virttest.unittest\_utils.mock.function\_mapping method), 94
- and\_return() (virttest.unittest\_utils.mock.function\_mapping method), 94
- anything\_comparator (class in virttest.unittest\_utils.mock), 93
- append\_to\_shortcode (virttest.cartesian\_config.Node attribute), 106
- apply\_predict() (in module virttest.cartesian\_config), 108
- apply\_to\_dict() (virttest.cartesian\_config.BlockFilter method), 101
- apply\_to\_dict() (virttest.cartesian\_config.LAppend method), 102
- apply\_to\_dict() (virttest.cartesian\_config.LApplyPreDict method), 102
- apply\_to\_dict() (virttest.cartesian\_config.LDel method), 102
- apply\_to\_dict() (virttest.cartesian\_config.LPrepend method), 104
- apply\_to\_dict() (virttest.cartesian\_config.LRegExpAppend method), 104
- apply\_to\_dict() (virttest.cartesian\_config.LRegExpPrepend method), 104
- apply\_to\_dict() (virttest.cartesian\_config.LRegExpSet method), 104
- apply\_to\_dict() (virttest.cartesian\_config.LSet method), 104
- apply\_to\_dict() (virttest.cartesian\_config.LUpdateFileMap method), 105
- apply\_to\_dict() (virttest.cartesian\_config.Suffix method), 108
- arch\_dirname\_iso() (in module virttest.utils\_windows.virtio\_win), 97
- arch\_dirname\_vfd() (in module virttest.utils\_windows.virtio\_win), 97
- are\_failed() (virttest.lvsb\_base.TestSandboxes method), 116
- are\_running() (virttest.lvsb\_base.TestSandboxes method), 116
- args (virttest.remote\_commander.remote\_interface.BaseCmd attribute), 86
- argument\_comparator (class in virttest.unittest\_utils.mock), 93
- assign() (virttest.cartesian\_config.Parser method), 107
- auto\_clean() (virttest.lvsb\_base.SandboxBase method), 114
- auto\_clean() (virttest.lvsb\_base.SandboxSession method), 115

## B

- backup() (virttest.xml\_utils.XMLBackup method), 134
- backup() (virttest.xml\_utils.XMLTreeFile method), 134
- backup\_copy() (virttest.xml\_utils.XMLTreeFile method), 134
- base\_mapping (class in virttest.unittest\_utils.mock), 93
- BaseCmd (class in virttest.remote\_commander.remote\_interface), 86
- basecmd (virttest.remote\_commander.remote\_master.CmdMaster attribute), 88
- BINARY\_PATH\_PARAM (virttest.lvsb\_base.SandboxCommandBase attribute), 114
- blocked (virttest.cartesian\_config.BlockFilter attribute), 101

- BlockFilter (class in virttest.cartesian\_config), 101
- BuilderClass (virttest.xml\_utils.TemplateXMLTreeBuilder attribute), 134
- ## C
- cal\_hamming\_distance() (in module virttest.ppm\_utils), 116
- check\_playback() (virttest.unittest\_utils.mock.mock\_god method), 94
- check\_token() (virttest.cartesian\_config.Lexer method), 105
- checkAlpha() (virttest.cartesian\_config.LIdentifier method), 103
- checkChar() (virttest.cartesian\_config.LIdentifier method), 103
- checkCharAlpha() (virttest.cartesian\_config.LIdentifier method), 103
- checkCharAlphaNum() (virttest.cartesian\_config.LIdentifier method), 103
- checkCharNumeric() (virttest.cartesian\_config.LIdentifier method), 103
- checkNumbers() (virttest.cartesian\_config.LIdentifier method), 103
- CheckPlaybackError, 93
- children (virttest.cartesian\_config.Node attribute), 107
- classproperty (class in virttest.propcan), 121
- clean\_tmp\_dir() (in module virttest.remote\_commander.remote\_runner), 92
- close() (virttest.element\_tree.TreeBuilder method), 111
- close() (virttest.element\_tree.XMLTreeBuilder method), 111
- close() (virttest.remote\_commander.messenger.IOWrapper method), 84
- close() (virttest.remote\_commander.messenger.Messenger method), 85
- close() (virttest.remote\_commander.messenger.StdIOWrapper method), 85
- close() (virttest.remote\_commander.remote\_master.CommanderMaster method), 89
- close() (virttest.rss\_client.FileTransferClient method), 123
- close() (virttest.unittest\_utils.mock.SaveDataAfterCloseStringIO method), 93
- close() (virttest.xml\_utils.TempXMLFile method), 133
- close\_pipes() (virttest.remote\_commander.remote\_runner.CommanderSlave method), 90
- close\_session() (virttest.lvsb\_base.SandboxSession method), 115
- close\_unused\_fds() (in module virttest.remote\_commander.remote\_runner), 92
- cmd() (virttest.remote\_commander.remote\_master.CommanderMaster method), 89
- cmd\_hash (virttest.remote\_commander.remote\_interface.BaseCmd attribute), 86
- cmd\_id (virttest.remote\_commander.remote\_interface.CmdMessage attribute), 87
- cmd\_id (virttest.remote\_commander.remote\_interface.StdErr attribute), 87
- cmd\_id (virttest.remote\_commander.remote\_interface.Stdout attribute), 87
- cmd\_loop() (virttest.remote\_commander.remote\_runner.CommanderSlave method), 91
- cmd\_tokens() (in module virttest.cartesian\_config), 108
- CmdEncapsulation (class in virttest.remote\_commander.remote\_master), 88
- CmdFinish (class in virttest.remote\_commander.remote\_runner), 90
- CmdMaster (class in virttest.remote\_commander.remote\_master), 88
- CmdMessage (class in virttest.remote\_commander.remote\_interface), 87
- CmdQuery (class in virttest.remote\_commander.remote\_interface), 87
- CmdRespond (class in virttest.remote\_commander.remote\_interface), 87
- CmdSlave (class in virttest.remote\_commander.remote\_runner), 90
- CmdTimeout, 89
- CmdTraceBack, 87
- command\_suffixes() (virttest.lvsb.TestBaseSandboxes method), 113
- Commander (class in virttest.remote\_commander.remote\_master), 89
- CommanderError, 87
- CommanderMaster (class in virttest.remote\_commander.remote\_master), 89
- CommanderSlave (class in virttest.remote\_commander.remote\_runner), 90
- CommanderSlaveCmds (class in virttest.remote\_commander.remote\_runner), 91
- Comment() (in module virttest.element\_tree), 110
- compare\_string() (in module virttest.cartesian\_config), 108
- Condition (class in virttest.cartesian\_config), 101
- conf\_path (virttest.utils\_config.LibvirtConfigCommon attribute), 127
- conf\_path (virttest.utils\_config.LibvirtConfig attribute), 128
- conf\_path (virttest.utils\_config.LibvirtSysConfig attribute), 128
- conf\_path (virttest.utils\_config.LibvirtGuestsConfig attribute), 127
- conf\_path (virttest.utils\_config.LibvirtQemuConfig attribute), 127
- conf\_path (virttest.utils\_config.LibvirtSanLockConfig attribute), 128

- ConfigError, 127
  - ConfigNoOptionError, 127
  - connected (virttest.lvsb\_base.SandboxSession attribute), 115
  - content (virttest.cartesian\_config.Condition attribute), 101
  - content (virttest.cartesian\_config.NegativeCondition attribute), 106
  - content (virttest.cartesian\_config.Node attribute), 107
  - context() (in module virttest.error\_context), 111
  - context\_aware() (in module virttest.error\_context), 111
  - convert\_data\_size() (in module virttest.cartesian\_config), 108
  - copy() (virttest.propcan.PropCanBase method), 121
  - copy\_file() (virttest.remote\_commander.remote\_runner.CommanderSlaveCmds method), 91
  - copyfile\_range() (virttest.http\_server.HTTPRequestHandler method), 112
  - create\_by\_xpath() (virttest.xml\_utils.XMLTreeFile method), 134
  - create\_mock\_class() (virttest.unittest\_utils.mock.mock\_god method), 94
  - create\_mock\_class\_obj() (virttest.unittest\_utils.mock.mock\_god method), 95
  - create\_mock\_function() (virttest.unittest\_utils.mock.mock\_god method), 95
  - create\_process\_cmd() (in module virttest.remote\_commander.remote\_runner), 92
- D**
- daemonize() (in module virttest.remote\_commander.remote\_runner), 92
  - data() (virttest.element\_tree.TreeBuilder method), 111
  - DataWrapper (class in virttest.remote\_commander.messenger), 84
  - DataWrapperBase64 (class in virttest.remote\_commander.messenger), 84
  - decode() (virttest.remote\_commander.messenger.DataWrapper method), 84
  - decode() (virttest.remote\_commander.messenger.DataWrapperBase64 method), 84
  - decode\_to\_text() (in module virttest.compat\_52lts), 109
  - decodeFacilityPriority() (virttest.syslog\_server.RequestHandler method), 126
  - default (virttest.cartesian\_config.Node attribute), 107
  - dep (virttest.cartesian\_config.Node attribute), 107
  - dest (virttest.cartesian\_config.LUpdateFileMap attribute), 105
  - DeviceError, 83
  - DeviceHotplugError, 83
  - DeviceInsertError, 83
  - DeviceRemoveError, 83
  - DeviceUnplugError, 83
  - distro (virttest.utils\_config.LibvirtdSysConfig attribute), 128
  - do\_GET() (virttest.http\_server.HTTPRequestHandler method), 112
  - do\_not\_report\_as\_logging\_caller() (in module virttest.logging\_manager), 113
  - doctype() (virttest.element\_tree.XMLTreeBuilder method), 111
  - download() (in module virttest.rss\_client), 124
  - download() (virttest.rss\_client.FileDownloadClient method), 122
  - drive\_letter\_iso() (in module virttest.utils\_windows.virtio\_win), 97
  - drive\_letter\_vfd() (in module virttest.utils\_windows.virtio\_win), 97
  - drop\_suffixes() (virttest.cartesian\_config.Parser method), 107
  - dump() (in module virttest.element\_tree), 110
  - dump() (virttest.cartesian\_config.Node method), 107
- E**
- Element() (in module virttest.element\_tree), 110
  - ElementTree (class in virttest.element\_tree), 110
  - encode() (virttest.remote\_commander.messenger.DataWrapper method), 84
  - encode() (virttest.remote\_commander.messenger.DataWrapperBase64 method), 84
  - end() (virttest.element\_tree.TreeBuilder method), 111
  - equality\_comparator (class in virttest.unittest\_utils.mock), 93
  - exception\_context() (in module virttest.error\_context), 111
  - exit() (virttest.remote\_commander.remote\_runner.CommanderSlaveCmds method), 91
  - exit\_code() (virttest.lvsb\_base.SandboxBase method), 114
  - exit\_code() (virttest.lvsb\_base.SandboxSession method), 115
  - expect\_any\_call() (virttest.unittest\_utils.mock.mock\_function method), 94
  - expect\_base64() (virttest.unittest\_utils.mock.mock\_function method), 94
  - extend\_volume() (in module virttest.utils\_windows.drive), 96
- F**
- FACILITY\_NAMES (virttest.syslog\_server.RequestHandler attribute), 125
  - factory() (in module virttest.versionable\_class), 131
  - factory() (virttest.versionable\_class.Manager method), 131
  - failed\_cases (virttest.cartesian\_config.Node attribute), 107

- feed() (virttest.element\_tree.XMLTreeBuilder method), 111
  - feed() (virttest.xml\_utils.TemplateXMLTreeBuilder method), 134
  - file\_exists() (in module virttest.utils\_windows.system), 97
  - FileDownloadClient (class in virttest.rss\_client), 121
  - filename (virttest.cartesian\_config.Node attribute), 107
  - fileno() (virttest.remote\_commander.messenger.IOWrapper method), 84
  - fileno() (virttest.remote\_commander.messenger.StdIOWrapper method), 85
  - FileReader (class in virttest.cartesian\_config), 101
  - FileTransferClient (class in virttest.rss\_client), 122
  - FileTransferConnectError, 123
  - FileTransferError, 123
  - FileTransferNotFoundError, 123
  - FileTransferProtocolError, 123
  - FileTransferServerError, 123
  - FileTransferSocketError, 123
  - FileTransferTimeoutError, 123
  - FileUploadClient (class in virttest.rss\_client), 123
  - Filter (class in virttest.cartesian\_config), 101
  - filter (virttest.cartesian\_config.Filter attribute), 101
  - final\_data (virttest.unittest\_utils.mock.SaveDataAfterCloseStringIO attribute), 93
  - find() (in module virttest.element\_path), 110
  - find() (virttest.element\_path.Path method), 110
  - find() (virttest.element\_tree.ElementTree method), 110
  - find\_id\_for\_screendump() (in module virttest.ppm\_utils), 117
  - findall() (in module virttest.element\_path), 110
  - findall() (virttest.element\_path.Path method), 110
  - findall() (virttest.element\_tree.ElementTree method), 110
  - findtext() (in module virttest.element\_path), 110
  - findtext() (virttest.element\_path.Path method), 110
  - findtext() (virttest.element\_tree.ElementTree method), 110
  - fini() (virttest.lvsb\_base.SandboxBase method), 114
  - finish() (virttest.remote\_commander.remote\_runner.CmdSlave method), 90
  - flatten\_options() (virttest.lvsb\_base.SandboxCommandBase static method), 114
  - flush() (virttest.logging\_manager.LoggingFile method), 112
  - flush() (virttest.xml\_utils.TempXMLFile method), 133
  - flush\_buf() (virttest.remote\_commander.remote\_runner.Helper method), 92
  - flush\_stdin() (virttest.remote\_commander.messenger.Messenger method), 85
  - flush\_until() (virttest.cartesian\_config.Lexer method), 105
  - for\_each() (virttest.lvsb\_base.TestSandboxes method), 116
  - format\_error() (in module virttest.error\_context), 111
  - format\_msg() (virttest.remote\_commander.messenger.Messenger method), 85
  - format\_size\_human\_readable() (in module virttest.utils\_numeric), 129
  - fromstring() (in module virttest.element\_tree), 110
  - func (virttest.remote\_commander.remote\_interface.BaseCmd attribute), 86
  - function (virttest.cartesian\_config.LOperators attribute), 103
  - function\_any\_args\_mapping (class in virttest.unittest\_utils.mock), 94
  - function\_mapping (class in virttest.unittest\_utils.mock), 94
- ## G
- gen\_tmp\_dir() (in module virttest.remote\_commander.remote\_runner), 92
  - generate\_id\_for\_screendump() (in module virttest.ppm\_utils), 117
  - get\_boolean() (virttest.utils\_config.SectionlessConfig method), 128
  - get\_context() (in module virttest.error\_context), 111
  - get\_data\_dir() (in module virttest.ppm\_utils), 117
  - get\_default\_format() (in module virttest.syslog\_server), 126
  - get\_default\_guest\_os\_info() (in module virttest.defaults), 109
  - get\_dicts() (virttest.cartesian\_config.Parser method), 107
  - get\_dicts\_plain() (virttest.cartesian\_config.Parser method), 107
  - get\_element\_string() (virttest.xml\_utils.XMLTreeFile method), 134
  - get\_float() (virttest.utils\_config.SectionlessConfig method), 128
  - get\_floppy\_drives\_letter() (in module virttest.utils\_windows.drive), 96
  - get\_hard\_drive\_letter() (in module virttest.utils\_windows.drive), 96
  - get\_int() (virttest.utils\_config.SectionlessConfig method), 128
  - get\_lexer() (virttest.cartesian\_config.Lexer method), 105
  - get\_list() (virttest.utils\_config.SectionlessConfig method), 128
  - get\_next\_check() (virttest.cartesian\_config.Lexer method), 105
  - get\_next\_check\_nw() (virttest.cartesian\_config.Lexer method), 105
  - get\_next\_line() (virttest.cartesian\_config.StrReader method), 108
  - get\_parent() (virttest.xml\_utils.XMLTreeFile method), 134
  - get\_parent\_map() (virttest.xml\_utils.XMLTreeFile method), 135

[get\\_raw\(\)](#) (virttest.utils\_config.SectionlessConfig method), 129  
[get\\_region\\_md5sum\(\)](#) (in module virttest.ppm\_utils), 117  
[get\\_string\(\)](#) (virttest.utils\_config.SectionlessConfig method), 129  
[get\\_until\(\)](#) (virttest.cartesian\_config.Lexer method), 106  
[get\\_until\\_check\(\)](#) (virttest.cartesian\_config.Lexer method), 106  
[get\\_until\\_gen\(\)](#) (virttest.cartesian\_config.Lexer method), 106  
[get\\_until\\_no\\_white\(\)](#) (virttest.cartesian\_config.Lexer method), 106  
[get\\_video\\_maker\\_class\(\)](#) (in module virttest.video\_maker), 132  
[get\\_xpath\(\)](#) (virttest.xml\_utils.XMLTreeFile method), 135  
[getbasecmd\(\)](#) (virttest.remote\_commander.remote\_master.CmdMaster method), 88  
[getcls\(\)](#) (virttest.versionable\_class.Manager method), 131  
[getiterator\(\)](#) (virttest.element\_tree.ElementTree method), 110  
[getroot\(\)](#) (virttest.element\_tree.ElementTree method), 110  
[getsource\(\)](#) (in module virttest.remote\_commander.remote\_master), 90  
[getstderr\(\)](#) (virttest.remote\_commander.remote\_master.CmdMaster method), 88  
[getstdout\(\)](#) (virttest.remote\_commander.remote\_master.CmdMaster method), 88

## H

[handle\(\)](#) (virttest.syslog\_server.RequestHandlerTcp method), 126  
[handle\(\)](#) (virttest.syslog\_server.RequestHandlerUdp method), 126  
[has\\_key\(\)](#) (virttest.propcan.PropCan method), 120  
[hash\\_name\(\)](#) (virttest.cartesian\_config.Label method), 105  
[hash\\_val](#) (virttest.cartesian\_config.Label attribute), 105  
[hash\\_var](#) (virttest.cartesian\_config.Label attribute), 105  
[hash\\_variant\(\)](#) (virttest.cartesian\_config.Label method), 105  
[have\\_similar\\_img\(\)](#) (in module virttest.ppm\_utils), 117  
[Helper](#) (class in virttest.remote\_commander.remote\_runner), 91  
[http\\_server\(\)](#) (in module virttest.http\_server), 112  
[HTTPRequestHandler](#) (class in virttest.http\_server), 112

## I

[identifier](#) (virttest.cartesian\_config.LAnd attribute), 102  
[identifier](#) (virttest.cartesian\_config.LAppend attribute), 102  
[identifier](#) (virttest.cartesian\_config.LApplyPreDict attribute), 102  
[identifier](#) (virttest.cartesian\_config.LCoc attribute), 102  
[identifier](#) (virttest.cartesian\_config.LColon attribute), 102  
[identifier](#) (virttest.cartesian\_config.LComa attribute), 102  
[identifier](#) (virttest.cartesian\_config.LCond attribute), 102  
[identifier](#) (virttest.cartesian\_config.LDefault attribute), 102  
[identifier](#) (virttest.cartesian\_config.LDel attribute), 102  
[identifier](#) (virttest.cartesian\_config.LDot attribute), 102  
[identifier](#) (virttest.cartesian\_config.LEndL attribute), 102  
[identifier](#) (virttest.cartesian\_config.LIdentifier attribute), 103  
[identifier](#) (virttest.cartesian\_config.LInclude attribute), 103  
[identifier](#) (virttest.cartesian\_config.LIndent attribute), 103  
[identifier](#) (virttest.cartesian\_config.LJoin attribute), 103  
[identifier](#) (virttest.cartesian\_config.LLBracket attribute), 103  
[identifier](#) (virttest.cartesian\_config.LLRRBracket attribute), 103  
[identifier](#) (virttest.cartesian\_config.LNo attribute), 103  
[identifier](#) (virttest.cartesian\_config.LNotCond attribute), 103  
[identifier](#) (virttest.cartesian\_config.LOnly attribute), 103  
[identifier](#) (virttest.cartesian\_config.LOperators attribute), 104  
[identifier](#) (virttest.cartesian\_config.LOr attribute), 104  
[identifier](#) (virttest.cartesian\_config.LPrepend attribute), 104  
[identifier](#) (virttest.cartesian\_config.LRBracket attribute), 104  
[identifier](#) (virttest.cartesian\_config.LRegExpAppend attribute), 104  
[identifier](#) (virttest.cartesian\_config.LRegExpPrepend attribute), 104  
[identifier](#) (virttest.cartesian\_config.LRegExpSet attribute), 104  
[identifier](#) (virttest.cartesian\_config.LRegExpStart attribute), 104  
[identifier](#) (virttest.cartesian\_config.LRegExpStop attribute), 104  
[identifier](#) (virttest.cartesian\_config.LRRBracket attribute), 104  
[identifier](#) (virttest.cartesian\_config.LSet attribute), 105  
[identifier](#) (virttest.cartesian\_config.LString attribute), 105  
[identifier](#) (virttest.cartesian\_config.LSuffix attribute), 105  
[identifier](#) (virttest.cartesian\_config.LUpdateFileMap attribute), 105  
[identifier](#) (virttest.cartesian\_config.LVariant attribute), 105  
[identifier](#) (virttest.cartesian\_config.LVariants attribute), 105  
[identifier](#) (virttest.cartesian\_config.LWhite attribute), 105  
[identifier](#) (virttest.cartesian\_config.Suffix attribute), 108  
[identifier](#) (virttest.cartesian\_config.Token attribute), 108

- image\_average\_hash() (in module virttest.ppm\_utils), 117
  - image\_comparison() (in module virttest.ppm\_utils), 117
  - image\_crop() (in module virttest.ppm\_utils), 118
  - image\_crop\_save() (in module virttest.ppm\_utils), 118
  - image\_fuzzy\_compare() (in module virttest.ppm\_utils), 118
  - image\_histogram\_compare() (in module virttest.ppm\_utils), 118
  - image\_md5sum() (in module virttest.ppm\_utils), 118
  - image\_read\_from\_ppm\_file() (in module virttest.ppm\_utils), 119
  - image\_verify\_ppm\_file() (in module virttest.ppm\_utils), 119
  - image\_write\_to\_ppm\_file() (in module virttest.ppm\_utils), 119
  - img\_ham\_distance() (in module virttest.ppm\_utils), 119
  - img\_similar() (in module virttest.ppm\_utils), 119
  - import\_src() (virttest.remote\_commander.remote\_runner.CommanderSlaveCmds method), 91
  - info() (virttest.remote\_commander.remote\_runner.Helper method), 92
  - init\_sandboxes() (virttest.lvsb\_base.TestSandboxes method), 116
  - INITIALIZED (virttest.propcan.PropCanBase attribute), 121
  - instances (virttest.lvsb\_base.SandboxBase attribute), 114
  - interactive() (virttest.remote\_commander.remote\_runner.CommanderSlaveCmds method), 91
  - IOWrapper (class in virttest.remote\_commander.messenger), 84
  - is\_async() (virttest.remote\_commander.remote\_interface.BaseCmd method), 86
  - is\_finished() (virttest.remote\_commander.remote\_interface.BaseCmd method), 86
  - is\_instance\_comparator (class in virttest.unittest\_utils.mock), 94
  - is\_irrelevant() (virttest.cartesian\_config.NoFilter method), 106
  - is\_irrelevant() (virttest.cartesian\_config.OnlyFilter method), 107
  - is\_noinstance() (in module virttest.utils\_windows.wmic), 98
  - is\_running() (virttest.lvsb\_base.SandboxSession method), 115
  - is\_satisfied\_by() (virttest.unittest\_utils.mock.anything\_comparator method), 93
  - is\_satisfied\_by() (virttest.unittest\_utils.mock.argument\_comparator method), 93
  - is\_satisfied\_by() (virttest.unittest\_utils.mock.equality\_comparator method), 94
  - is\_satisfied\_by() (virttest.unittest\_utils.mock.is\_instance\_comparator method), 94
  - is\_satisfied\_by() (virttest.unittest\_utils.mock.is\_string\_comparator method), 94
  - is\_satisfied\_by() (virttest.unittest\_utils.mock.regex\_comparator method), 95
  - is\_string\_comparator (class in virttest.unittest\_utils.mock), 94
  - isatty() (virttest.logging\_manager.LoggingFile method), 112
  - isclass() (in module virttest.versionable\_class), 132
  - isCmdMsg() (virttest.remote\_commander.remote\_interface.CmdMessage method), 87
  - iselement() (in module virttest.element\_tree), 110
  - items() (virttest.propcan.PropCan method), 120
  - iterparse (class in virttest.element\_tree), 110
- ## J
- JoinFilter (class in virttest.cartesian\_config), 101
- ## K
- CommanderSlaveCmds (class in virttest.remote\_commander.remote\_interface.BaseCmd attribute), 86
  - keys() (virttest.propcan.PropCan method), 120
  - kill\_session() (virttest.lvsb\_base.SandboxSession method), 115
- ## L
- Label (class in virttest.cartesian\_config), 105
  - labels (virttest.cartesian\_config.Node attribute), 107
  - LAnd (class in virttest.cartesian\_config), 101
  - LAppend (class in virttest.cartesian\_config), 102
  - LApplyPreDict (class in virttest.cartesian\_config), 102
  - LCoc (class in virttest.cartesian\_config), 102
  - LColon (class in virttest.cartesian\_config), 102
  - LComa (class in virttest.cartesian\_config), 102
  - LCond (class in virttest.cartesian\_config), 102
  - LDefault (class in virttest.cartesian\_config), 102
  - LDel (class in virttest.cartesian\_config), 102
  - LDot (class in virttest.cartesian\_config), 102
  - LEndBlock (class in virttest.cartesian\_config), 102
  - LEndL (class in virttest.cartesian\_config), 102
  - length (virttest.cartesian\_config.LIndent attribute), 103
  - Lexer (class in virttest.cartesian\_config), 105
  - LexerError, 106
  - LibvirtConfigCommon (class in virttest.utils\_config), 127
  - LibvirtConfigUnknownKeyError, 127
  - LibvirtConfigUnknownKeyTypeError, 127
  - LibvirtDConfig (class in virttest.utils\_config), 128
  - LibvirtSysConfig (class in virttest.utils\_config), 128
  - LibvirtGuestsConfig (class in virttest.utils\_config), 127
  - LibvirtQemuConfig (class in virttest.utils\_config), 127
  - LibvirtSanLockConfig (class in virttest.utils\_config), 127
  - LIdentifier (class in virttest.cartesian\_config), 102
  - LInclude (class in virttest.cartesian\_config), 103
  - LIndent (class in virttest.cartesian\_config), 103

- line (virttest.cartesian\_config.NoOnlyFilter attribute), 106
  - list\_flags() (virttest.lvsb\_base.SandboxCommandBase method), 115
  - list\_long\_options() (virttest.lvsb\_base.SandboxCommandBase method), 115
  - list\_pos() (virttest.lvsb\_base.SandboxCommandBase method), 115
  - list\_short\_options() (virttest.lvsb\_base.SandboxCommandBase method), 115
  - listen\_cmds() (virttest.remote\_commander.remote\_master.CommanderMaster method), 89
  - listen\_errors() (virttest.remote\_commander.remote\_master.CommanderMaster method), 89
  - listen\_messenger() (virttest.remote\_commander.remote\_master.CommanderMaster method), 89
  - listen\_queries() (virttest.remote\_commander.remote\_master.CommanderMaster method), 89
  - listen\_streams() (virttest.remote\_commander.remote\_master.CommanderMaster method), 89
  - LJoin (class in virttest.cartesian\_config), 103
  - LLBracket (class in virttest.cartesian\_config), 103
  - LLRBracket (class in virttest.cartesian\_config), 103
  - LNo (class in virttest.cartesian\_config), 103
  - LNotCond (class in virttest.cartesian\_config), 103
  - log() (virttest.syslog\_server.RequestHandler method), 126
  - LOG\_ALERT (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_AUTH (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_AUTHPRIV (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_CRIT (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_CRON (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_DAEMON (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_DEBUG (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_EMERG (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_ERR (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_FTP (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_INFO (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_KERN (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_LOCAL0 (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_LOCAL1 (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_LOCAL2 (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_LOCAL3 (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_LOCAL4 (virttest.syslog\_server.RequestHandler attribute), 125
  - LOG\_LOCAL5 (virttest.syslog\_server.RequestHandler attribute), 126
  - LOG\_LOCAL6 (virttest.syslog\_server.RequestHandler attribute), 126
  - LOG\_LOCAL7 (virttest.syslog\_server.RequestHandler attribute), 126
  - LOG\_LPR (virttest.syslog\_server.RequestHandler attribute), 126
  - LOG\_MAIL (virttest.syslog\_server.RequestHandler attribute), 126
  - log\_message() (virttest.http\_server.HTTPRequestHandler method), 112
  - LOG\_NEWS (virttest.syslog\_server.RequestHandler attribute), 126
  - LOG\_NOTICE (virttest.syslog\_server.RequestHandler attribute), 126
  - LOG\_SYSLOG (virttest.syslog\_server.RequestHandler attribute), 126
  - LOG\_USER (virttest.syslog\_server.RequestHandler attribute), 126
  - LOG\_UUCP (virttest.syslog\_server.RequestHandler attribute), 126
  - LOG\_WARNING (virttest.syslog\_server.RequestHandler attribute), 126
  - LoggingFile (class in virttest.logging\_manager), 112
  - long\_name (virttest.cartesian\_config.Label attribute), 105
  - LOnly (class in virttest.cartesian\_config), 103
  - LOperators (class in virttest.cartesian\_config), 103
  - LOr (class in virttest.cartesian\_config), 104
  - LPrepend (class in virttest.cartesian\_config), 104
  - LRBracket (class in virttest.cartesian\_config), 104
  - LRegExpAppend (class in virttest.cartesian\_config), 104
  - LRegExpPrepend (class in virttest.cartesian\_config), 104
  - LRegExpSet (class in virttest.cartesian\_config), 104
  - LRegExpStart (class in virttest.cartesian\_config), 104
  - LRegExpStop (class in virttest.cartesian\_config), 104
  - LRRBracket (class in virttest.cartesian\_config), 104
  - LSet (class in virttest.cartesian\_config), 104
  - LString (class in virttest.cartesian\_config), 105
  - LSuffix (class in virttest.cartesian\_config), 105
  - LUpdateFileMap (class in virttest.cartesian\_config), 105
  - LVariant (class in virttest.cartesian\_config), 105
  - LVariants (class in virttest.cartesian\_config), 105
  - LWhite (class in virttest.cartesian\_config), 105
- ## M
- main() (in module virttest.rss\_client), 124

- main() (in module virttest.scan\_autotest\_results), 124
  - make\_query() (in module virttest.utils\_windows.wmic), 98
  - make\_sandbox\_command\_line() (virttest.lvsb\_base.SandboxBase method), 114
  - make\_sandbox\_command\_line() (virttest.lvsb\_base.SandboxCommandBase method), 115
  - make\_sandboxes() (in module virttest.lvsb), 113
  - Manager (class in virttest.versionable\_class), 131
  - mask\_function (class in virttest.unittest\_utils.mock), 94
  - match() (virttest.cartesian\_config.Filter method), 101
  - match() (virttest.cartesian\_config.Lexer method), 106
  - match() (virttest.unittest\_utils.mock.base\_mapping method), 93
  - match() (virttest.unittest\_utils.mock.function\_any\_args\_mapping method), 94
  - md5eval() (in module virttest.ppm\_utils), 119
  - Messenger (class in virttest.remote\_commander.messenger), 84
  - messenger (virttest.remote\_commander.remote\_runner.Help attribute), 92
  - MessengerError, 85, 87
  - might\_match() (virttest.cartesian\_config.Filter method), 101
  - might\_pass() (virttest.cartesian\_config.NoFilter method), 106
  - might\_pass() (virttest.cartesian\_config.OnlyFilter method), 107
  - MissingIncludeError, 106
  - mk\_name() (virttest.cartesian\_config.Parser method), 107
  - mock\_class (class in virttest.unittest\_utils.mock), 94
  - mock\_function (class in virttest.unittest\_utils.mock), 94
  - mock\_god (class in virttest.unittest\_utils.mock), 94
  - mock\_io() (virttest.unittest\_utils.mock.mock\_god method), 95
  - mock\_up() (virttest.unittest\_utils.mock.mock\_god method), 95
  - ModuleWrapper (class in virttest.versionable\_class), 131
  - msg (virttest.remote\_commander.remote\_interface.StdErr attribute), 87
  - msg (virttest.remote\_commander.remote\_interface.Stdout attribute), 87
  - msg (virttest.remote\_commander.remote\_interface.StdStream attribute), 88
  - multiply\_join() (virttest.cartesian\_config.Parser method), 107
- ## N
- name (virttest.cartesian\_config.Label attribute), 105
  - name (virttest.cartesian\_config.LOperators attribute), 104
  - name (virttest.cartesian\_config.Node attribute), 107
  - name (virttest.lvsb\_base.SandboxCommandBase attribute), 115
  - NegativeCondition (class in virttest.cartesian\_config), 106
  - new\_session() (virttest.lvsb\_base.SandboxSession method), 115
  - next() (virttest.element\_tree.iterparse method), 110
  - next\_nw() (in module virttest.cartesian\_config), 109
  - nh\_stderr (virttest.remote\_commander.remote\_interface.BaseCmd attribute), 86
  - nh\_stdin (virttest.remote\_commander.remote\_interface.BaseCmd attribute), 86
  - nh\_stdout (virttest.remote\_commander.remote\_interface.BaseCmd attribute), 86
  - no\_filter() (virttest.cartesian\_config.Parser method), 107
  - Node (class in virttest.cartesian\_config), 106
  - NoFilter (class in virttest.cartesian\_config), 106
  - none\_or\_int() (in module virttest.qemu\_devices.utils), 83
  - NONEXISTENT\_ATTRIBUTE (virttest.unittest\_utils.mock.mock\_god attribute), 94
  - NoOnlyFilter (class in virttest.cartesian\_config), 106
  - normalize\_data\_size() (in module virttest.utils\_numeric), 130
- ## O
- only\_filter() (virttest.cartesian\_config.Parser method), 107
  - OnlyFilter (class in virttest.cartesian\_config), 107
  - open\_session() (virttest.lvsb\_base.SandboxSession method), 115
  - os\_arch() (in module virttest.utils\_windows.system), 97
- ## P
- parse() (in module virttest.element\_tree), 110
  - parse() (virttest.element\_tree.ElementTree method), 110
  - parse() (virttest.xml\_utils.TemplateXML method), 134
  - parse\_file() (virttest.cartesian\_config.Parser method), 108
  - parse\_filter() (in module virttest.cartesian\_config), 109
  - parse\_func\_name() (virttest.remote\_commander.remote\_runner.CmdSlave method), 90
  - parse\_header\_byte\_range() (virttest.http\_server.HTTPRequestHandler method), 112
  - parse\_list() (in module virttest.utils\_windows.wmic), 98
  - parse\_results() (in module virttest.scan\_autotest\_results), 124
  - parse\_string() (virttest.cartesian\_config.Parser method), 108
  - Parser (class in virttest.cartesian\_config), 107
  - ParserClass (virttest.xml\_utils.TemplateXML attribute), 133
  - ParserError, 108
  - Path (class in virttest.element\_path), 110

- PI() (in module virttest.element\_tree), 110
- pid (virttest.remote\_commander.remote\_runner.CmdFinish attribute), 90
- postfix\_parse() (in module virttest.cartesian\_config), 109
- print\_dicts() (in module virttest.cartesian\_config), 109
- print\_dicts\_default() (in module virttest.cartesian\_config), 109
- print\_dicts\_repr() (in module virttest.cartesian\_config), 109
- print\_result() (in module virttest.scan\_autotest\_results), 125
- PRIORITY\_NAMES (virttest.syslog\_server.RequestHandler attribute), 126
- ProcessingInstruction() (in module virttest.element\_tree), 110
- product\_dirname\_iso() (in module virttest.utils\_windows.virtio\_win), 98
- product\_dirname\_vfd() (in module virttest.utils\_windows.virtio\_win), 98
- product\_name() (in module virttest.utils\_windows.system), 97
- PropCan (class in virttest.propcan), 120
- PropCanBase (class in virttest.propcan), 121
- PropCanInternal (class in virttest.propcan), 121
- python\_file\_run\_with\_helper() (virttest.remote\_commander.remote\_runner.CommanderSlave.Cmd method), 91
- Q**
- q\_dict (virttest.cartesian\_config.Node attribute), 107
- QName (class in virttest.element\_tree), 110
- query\_master() (virttest.remote\_commander.remote\_runner.Helper method), 92
- R**
- read() (virttest.remote\_commander.messenger.IOWrapper method), 84
- read() (virttest.remote\_commander.messenger.StdIOWrapper method), 85
- read() (virttest.xml\_utils.TempXMLFile method), 133
- read() (virttest.xml\_utils.XMLTreeFile method), 135
- read\_msg() (virttest.remote\_commander.messenger.Messenger method), 85
- readline() (virttest.xml\_utils.TempXMLFile method), 133
- readlines() (virttest.xml\_utils.TempXMLFile method), 133
- RECORD\_RE (virttest.syslog\_server.RequestHandler attribute), 126
- recover\_fds() (virttest.remote\_commander.remote\_runner.CommanderSlave.Cmd method), 90
- recover\_paths() (virttest.remote\_commander.remote\_runner.CommanderSlave.Cmd method), 90
- recv() (virttest.lvsb\_base.SandboxBase method), 114
- recv() (virttest.lvsb\_base.SandboxSession method), 115
- recvrr() (virttest.lvsb\_base.SandboxBase method), 114
- recvrr() (virttest.lvsb\_base.SandboxSession method), 115
- recvout() (virttest.lvsb\_base.SandboxBase method), 114
- recvout() (virttest.lvsb\_base.SandboxSession method), 115
- regex\_comparator (class in virttest.unittest\_utils.mock), 95
- register\_cmd() (virttest.remote\_commander.remote\_runner.CommanderSlave.Cmd method), 91
- remote\_agent() (in module virttest.remote\_commander.remote\_runner), 92
- remove() (virttest.xml\_utils.XMLTreeFile method), 135
- remove() (virttest.yumrepo.YumRepo method), 136
- remove\_by\_xpath() (virttest.xml\_utils.XMLTreeFile method), 135
- render() (virttest.yumrepo.YumRepo method), 136
- RequestHandler (class in virttest.syslog\_server), 125
- RequestHandlerTcp (class in virttest.syslog\_server), 126
- RequestHandlerUdp (class in virttest.syslog\_server), 126
- requires\_action() (virttest.cartesian\_config.NoFilter method), 106
- requires\_action() (virttest.cartesian\_config.OnlyFilter method), 107
- reroot() (virttest.xml\_utils.XMLTreeFile method), 135
- rescan\_slaves() (in module virttest.utils\_windows.drive), 96
- rest\_line() (virttest.cartesian\_config.Lexer method), 106
- rest\_line\_as\_LString() (virttest.cartesian\_config.Lexer method), 106
- rest\_line\_gen() (virttest.cartesian\_config.Lexer method), 106
- rest\_line\_no\_white() (virttest.cartesian\_config.Lexer method), 106
- restore() (virttest.utils\_config.SectionlessConfig method), 129
- restore() (virttest.xml\_utils.TemplateXML method), 134
- restore() (virttest.xml\_utils.XMLBackup method), 134
- restore() (virttest.xml\_utils.XMLTreeFile method), 135
- results (virttest.remote\_commander.remote\_interface.BaseCmd attribute), 86
- results() (virttest.lvsb.TestBaseSandboxes method), 113
- results\_stderr\_52lts() (in module virttest.compat\_52lts), 109
- results\_stdout\_52lts() (in module virttest.compat\_52lts), 109
- run() (virttest.lvsb\_base.SandboxBase method), 114
- run\_original\_function() (virttest.unittest\_utils.mock.mask\_function method), 94
- running() (virttest.lvsb\_base.SandboxBase method), 114
- S**
- SANDBOX\_TYPE (virttest.lvsb\_base.TestSandboxes attribute), 116

- SandboxBase (class in virttest.lvsb\_base), 113
- SandboxCommandBase (class in virttest.lvsb\_base), 114
- SandboxException, 115
- SandboxSession (class in virttest.lvsb\_base), 115
- save() (virttest.yumrepo.YumRepo method), 136
- SaveDataAfterCloseStringIO (class in virttest.unittest\_utils.mock), 93
- SectionlessConfig (class in virttest.utils\_config), 128
- seek() (virttest.xml\_utils.TempXMLFile method), 133
- send() (virttest.lvsb\_base.SandboxBase method), 114
- send() (virttest.lvsb\_base.SandboxSession method), 115
- send\_head\_range() (virttest.http\_server.HTTPRequestHandler method), 112
- send\_msg() (virttest.remote\_commander.remote\_runner.CommanderSlaveCmds method), 91
- send\_stdin() (virttest.remote\_commander.remote\_master.CmdMaster method), 88
- session\_id (virttest.lvsb\_base.SandboxSession attribute), 116
- set\_boolean() (virttest.utils\_config.SectionlessConfig method), 129
- set\_commander() (virttest.remote\_commander.remote\_master.CmdMaster method), 88
- set\_default\_format() (in module virttest.syslog\_server), 126
- set\_fail\_fast() (virttest.unittest\_utils.mock.mock\_god method), 95
- set\_fast() (virttest.cartesian\_config.Lexer method), 106
- set\_float() (virttest.utils\_config.SectionlessConfig method), 129
- set\_if\_none() (virttest.propcan.PropCan method), 120
- set\_if\_value\_not\_none() (virttest.propcan.PropCan method), 120
- set\_int() (virttest.utils\_config.SectionlessConfig method), 129
- set\_list() (virttest.utils\_config.SectionlessConfig method), 129
- set\_next\_line() (virttest.cartesian\_config.StrReader method), 108
- set\_operands() (virttest.cartesian\_config.LApplyPreDict method), 102
- set\_operands() (virttest.cartesian\_config.LOperators method), 104
- set\_operands() (virttest.cartesian\_config.LUpdateFileMap method), 105
- set\_prev\_indent() (virttest.cartesian\_config.Lexer method), 106
- set\_raw() (virttest.utils\_config.SectionlessConfig method), 129
- set\_responder() (virttest.remote\_commander.remote\_master.CmdMaster method), 89
- set\_strict() (virttest.cartesian\_config.Lexer method), 106
- set\_string() (virttest.utils\_config.SectionlessConfig method), 129
- setbasecmd() (virttest.remote\_commander.remote\_master.CmdMaster method), 88
- setstderr() (virttest.remote\_commander.remote\_master.CmdMaster method), 88
- setstdout() (virttest.remote\_commander.remote\_master.CmdMaster method), 88
- shell() (virttest.remote\_commander.remote\_runner.CommanderSlaveCmds method), 91
- shortname (virttest.cartesian\_config.LUpdateFileMap attribute), 105
- shrink\_volume() (in module virttest.utils\_windows.drive), 96
- single\_cmd\_id (virttest.remote\_commander.remote\_interface.BaseCmd attribute), 86
- sort\_fds\_event() (in module virttest.remote\_commander.remote\_runner), 92
- sourcebackupfile (virttest.xml\_utils.XMLTreeFile attribute), 135
- sourcefilename (virttest.xml\_utils.XMLBackup attribute), 134
- start() (virttest.element\_tree.TreeBuilder method), 111
- start() (virttest.remote\_commander.remote\_interface.CmdMaster method), 87
- stderr (virttest.remote\_commander.remote\_master.CmdMaster attribute), 88
- StdIOWrapper (class in virttest.remote\_commander.messenger), 85
- StdIOWrapperIn (class in virttest.remote\_commander.messenger), 85
- StdIOWrapperInBase64 (class in virttest.remote\_commander.messenger), 85
- StdIOWrapperOut (class in virttest.remote\_commander.messenger), 86
- StdIOWrapperOutBase64 (class in virttest.remote\_commander.messenger), 86
- StdOut (class in virttest.remote\_commander.remote\_interface), 87
- stdout (virttest.remote\_commander.remote\_master.CmdMaster attribute), 89
- StdStream (class in virttest.remote\_commander.remote\_interface), 88
- stop() (virttest.lvsb\_base.SandboxBase method), 114
- StrReader (class in virttest.cartesian\_config), 108
- stub\_class() (virttest.unittest\_utils.mock.mock\_god method), 95
- stub\_class\_method() (virttest.unittest\_utils.mock.mock\_god method), 95
- stub\_function() (virttest.unittest\_utils.mock.mock\_god method), 95
- stub\_function\_return() (virttest.unittest\_utils.mock.mock\_god method), 95
- stub\_with() (virttest.unittest\_utils.mock.mock\_god method), 95

StubNotFoundError, 93  
 Sub (class in virttest.xml\_utils), 132  
 SubElement() (in module virttest.element\_tree), 110  
 substitute() (virttest.xml\_utils.Sub method), 133  
 Suffix (class in virttest.cartesian\_config), 108  
 syslog\_server() (in module virttest.syslog\_server), 126  
 SysLogServerTcp (class in virttest.syslog\_server), 126  
 SysLogServerUdp (class in virttest.syslog\_server), 126

## T

tell() (virttest.xml\_utils.TempXMLFile method), 133  
 TemplateXML (class in virttest.xml\_utils), 133  
 TemplateXMLTreeBuilder (class in virttest.xml\_utils), 134  
 TempXMLFile (class in virttest.xml\_utils), 133  
 TestBaseSandboxes (class in virttest.lvsb), 113  
 TestComplexSandboxes (class in virttest.lvsb), 113  
 TestSandboxes (class in virttest.lvsb\_base), 116  
 TestSimpleSandboxes (class in virttest.lvsb), 113  
 Token (class in virttest.cartesian\_config), 108  
 toString() (in module virttest.element\_tree), 110  
 translate\_path() (virttest.http\_server.HTTPRequestHandler method), 112  
 TreeBuilder (class in virttest.element\_tree), 111  
 truncate() (virttest.xml\_utils.TempXMLFile method), 133

## U

unlink() (virttest.xml\_utils.TempXMLFile method), 133  
 unmock\_io() (virttest.unittest\_utils.mock.mock\_god method), 95  
 unstub() (virttest.unittest\_utils.mock.mock\_god method), 95  
 unstub\_all() (virttest.unittest\_utils.mock.mock\_god method), 95  
 update() (virttest.propcan.PropCanBase method), 121  
 update() (virttest.remote\_commander.remote\_interface.BaseCmd method), 87  
 update\_cmd\_hash() (virttest.remote\_commander.remote\_interface.BaseCmd method), 87  
 upload() (in module virttest.rss\_client), 124  
 upload() (virttest.rss\_client.FileUploadClient method), 124  
 used (virttest.lvsb\_base.SandboxSession attribute), 116

## V

value (virttest.cartesian\_config.LOperators attribute), 104  
 values() (virttest.propcan.PropCan method), 121  
 var\_name (virttest.cartesian\_config.Label attribute), 105  
 var\_name (virttest.cartesian\_config.Node attribute), 107  
 version() (in module virttest.utils\_windows.system), 97  
 VersionableClass (class in virttest.versionable\_class), 131  
 VersionInterval (class in virttest.utils\_version), 130  
 video\_maker() (in module virttest.video\_maker), 132  
 virttest (module), 136

virttest.cartesian\_config (module), 99  
 virttest.compat\_52lts (module), 109  
 virttest.defaults (module), 109  
 virttest.element\_path (module), 110  
 virttest.element\_tree (module), 110  
 virttest.error\_context (module), 111  
 virttest.http\_server (module), 112  
 virttest.logging\_manager (module), 112  
 virttest.lvsb (module), 113  
 virttest.lvsb\_base (module), 113  
 virttest.ppm\_utils (module), 116  
 virttest.propcan (module), 119  
 virttest.qemu\_devices (module), 83  
 virttest.qemu\_devices.utils (module), 83  
 virttest.remote\_commander (module), 92  
 virttest.remote\_commander.messenger (module), 84  
 virttest.remote\_commander.remote\_interface (module), 86  
 virttest.remote\_commander.remote\_master (module), 88  
 virttest.remote\_commander.remote\_runner (module), 90  
 virttest.rss\_client (module), 121  
 virttest.scan\_autotest\_results (module), 124  
 virttest.syslog\_server (module), 125  
 virttest.unittest\_utils (module), 95  
 virttest.unittest\_utils.mock (module), 93  
 virttest.utils\_config (module), 127  
 virttest.utils\_numeric (module), 129  
 virttest.utils\_version (module), 130  
 virttest.utils\_windows (module), 99  
 virttest.utils\_windows.drive (module), 96  
 virttest.utils\_windows.system (module), 97  
 virttest.utils\_windows.virtio\_win (module), 97  
 virttest.utils\_windows.wmic (module), 98  
 virttest.versionable\_class (module), 131  
 virttest.video\_maker (module), 132  
 virttest.xml\_utils (module), 132  
 virttest.yumrepo (module), 135

## W

wait() (virttest.remote\_commander.remote\_master.CmdMaster method), 89  
 wait() (virttest.remote\_commander.remote\_master.CommanderMaster method), 90  
 wait\_response() (virttest.remote\_commander.remote\_master.CmdMaster method), 89  
 wait\_response() (virttest.remote\_commander.remote\_master.CommanderMaster method), 90  
 wait\_timeout() (in module virttest.remote\_commander.remote\_master), 90  
 work() (virttest.remote\_commander.remote\_runner.CmdSlave method), 90  
 write() (virttest.element\_tree.ElementTree method), 110  
 write() (virttest.logging\_manager.LoggingFile method), 112

`write()` (`virttest.remote_commander.messenger.IOWrapper` method), 84  
`write()` (`virttest.remote_commander.messenger.StdIOWrapperOut` method), 86  
`write()` (`virttest.xml_utils.TempXMLFile` method), 133  
`write()` (`virttest.xml_utils.XMLTreeFile` method), 135  
`write_msg()` (`virttest.remote_commander.messenger.Messenger` method), 85  
`writelines()` (`virttest.logging_manager.LoggingFile` method), 113

## X

`XML()` (in module `virttest.element_tree`), 111  
`XMLBackup` (class in `virttest.xml_utils`), 134  
`XMLParser` (in module `virttest.element_tree`), 111  
`XMLTreeBuilder` (class in `virttest.element_tree`), 111  
`XMLTreeFile` (class in `virttest.xml_utils`), 134  
`xpath_descendant_or_self` (class in `virttest.element_path`), 110  
`xpath_tokenizer()` (in module `virttest.element_path`), 110

## Y

`YumRepo` (class in `virttest.yumrepo`), 135